ORDER NO. VSD9605M201
D4

Service Manual

Panasonic
Professional/Industrial Video

S-VHS Hi-Fi

Editing Video Cassette Recorder

AG-DS850HP

Editing Video Cassette Player

AG-DS840HP

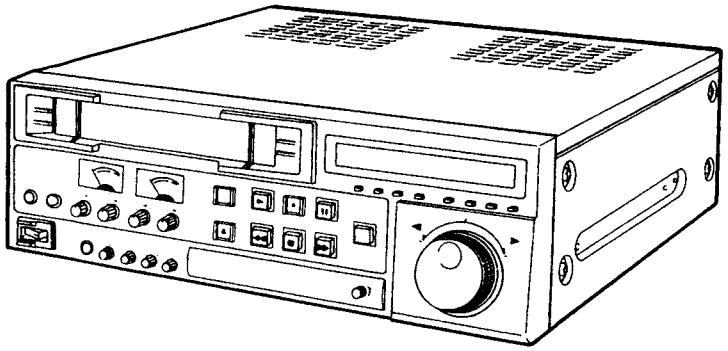

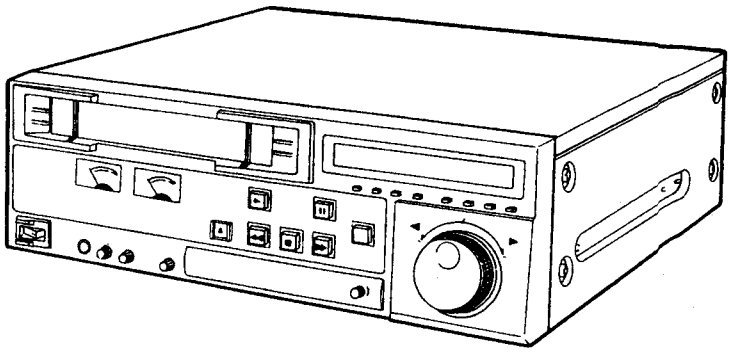

Please use this simplified service manual with the service manual for Model AG-DS850P Volume 1 (Order No. VSD9403M244), Volume 2 (Order No. VSD9404M245) and Model AG-DS840P (Order No. VSD9411M254). Also please refer to the supplement service manual for AG-DS850P and AG-DS840P.

Panasonic

© 1996 Matsushita Electric Industrial Co., Ltd. All rights reserved.
Unauthorized copying and distribution is a violation of law.

⚠ WARNING

This service information is designed for experienced repair technicians only and is not designed for use by the general public.
It does not contain warnings or cautions to advice non-technical individuals of potential dangers in attempting to service a product.
Products powered by electricity should be serviced or repaired only by experienced professional technicians. Any attempt to service or repair the product or products dealt with in this service manual by anyone else could result in serious injury or death.

INTRODUCTION

This Simplified Service Manual describes the changes from Panasonic S-VHS Hi-Fi Video Cassette Recorder /Player model AG-DS850P/AG-DS840P to AG-DS850HP/AG-DS840HP.

It contains the list of supplement service manuals for AG-DS850P/AG-DS840P and the replacement parts lists.

Please use this simplified Service Manual together with AG-DS850P Service Manuals (Order No. VSD9403M244 (Vol. 1), VSD9404M245 (Vol. 2)), AG-DS840P Service Manual (Order No. VSD9411M254) and Supplement service manuals listed later.

CONTENTS

INTRODUCTION ····· 1
SAFETY PRECAUTIONS ····· 2
1. AG-DS850P SUPPLEMENTS ····· 3
2. AG-DS840P SUPPLEMENTS ····· 5
3. EXPLODED VIEWS & REPLACEMENT PARTS LISTS ····· PRT-1

SAFETY PRECAUTIONS

GENERAL GUIDELINES

1. When servicing observe the original lead dress. If a short circuit is found, replac all parts which have been overheated or damaged by the short circuit.
2. After servicing, see to it that all the protectiv devices such as insulation barriers, insulation papers shields are properly installed.
3. After servicing make the following leakage current checks to prevent the customer from being exposed to shock hazards.

LEAKAGE CURRENT COLD CHECK

1. Unplug the AC cord and connect a jumper between the two prongs onthe plug.
2. Measur the resistance value, with an ohm meter, between the jumpered AC plug and each exposed metallic cabinet part on the equipment such as screwhead connectors, contrl shafts, etc. When the exposed metallic part has a return path to the chassis, the reading shoulb be between 1MΩ and 5.2MΩ .
   When the exposed metal dose not have a return path to the chassis, the reading must be ∞ .

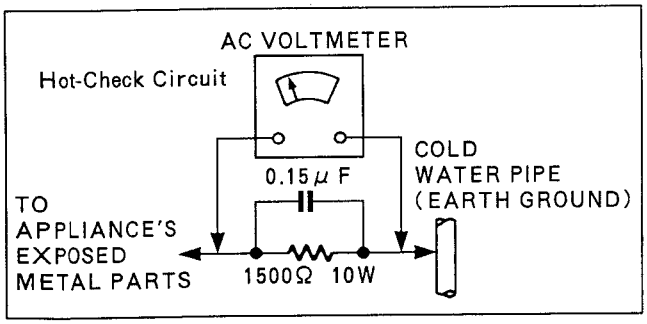

Figure 1

LEAKAGE CURRENT HOT CHECK (See Figure 1)

1. Plug the AC cord directly into the AC outlet.
   Do not use an isolation transformer for this check.
2. Connect a 1.5KΩ , 10W resistor, inparallel with 0.15μF capacitor, between each exposed metallic part on the set an a good earth ground such as a water pipe, as shown in Figure 1.
3. Use an AC voltmeter, with 1000 ohms/volt or more sensitivity, to measur the potential across the resistor.
4. Check each exposed metallic part, and measure the voltage at each point.
5. Reverse the AC plug in the AC outlet repeat each of the above measurements.
6. The potantial at any point should not exceed 0.75 volts RMS. A leakage current tester (Simpson Model 229 equivalent) may be used to make the hot checks, leakage current must not exceed 1/2 milliamp. In case a measurement is outside of the limits specified, there is a possiblity of a shock hazard, and the equipment should be repaired and rechecked before it is returned to the customer.

ELECTROSTATICALLY SENSITIVE(ES) DEVICES

Some semiconductor (solid state) devices can be damaged easily by static electricity. Such components commonly are called Electrostatically sensitive (ES) Devices. Examples of typical ES devices are integrated circuits and some field-effect transistors and semiconductor "chip" components. The following techniques should be used to help reduce the incidence of component damage caused by static electricity.

1. Immediately before handling any semiconductor component or semiconductor-equipped assembly, drain off any electrostatic charge on your body by touching a known earth ground.
   Alternatively, obtain and wear a commercially available discharging wrist strap device, which should be removed for potential shock reasons prior to applying power to the unit under test.
2. After removing an electrical assembly equipped with ES devices, place the assembly on a conductive surface such as aluminum foil, to prevent electrostatic charge buildup or exposure of the assembly.
3. Use only a grounded tip soldering iron to solder or unsolder ES devices.
4. Use only an anti-static solder removal device classified as "anti-static" can generate electrical charges sufficient to damage ES devices.
5. Do not use freon-propelled chemicals. These can generate electrical charges sufficient to damage ES devices.
6. Do not remove a replacement ES device from its protective package untilimmediately before you are ready to install it. (most replacement ES devices are packaged with leads electrically shorted together by conductive foam, aluminum foil or comparable conductive material).
7. Immediately before removing the protective material from the leads of replacement ES device, touch the protective material to the chassis or circuit assembly into which the device will be installed.
   CAUTION: Be sure no power is applied to the chassis or circuit, and observe all otner asfety precautions.
8. Minimize bodily motions when handling unpackaged replacement ES devoces. (Otherwise harmless mother such as the brushing together of your clothes fabric or the lifting of your foor from a carpeted floor can generate static electricity sufficient to damage an ES device).

1. AG-DS850P SUPPLEMENTS

Order No	Bulletin No	Subject	Effective from
VSD9410S250	1	Correction of Service Manual	
VSD9410S251	2	Change of Parts Number	D4T...
VSD9410S251	3	Change of EP-ROM(Ver Up)	D4T...
VSD9410S251	4	Change of Parts List	D4T...
VSD9410S251	5	Change of Screw	D4T...
VSD9410S251	6	Change of Parts Number	E4T...
VSD9410S251	7	Improvement of Temp. Chara. & H.Noise on Chroma	E4T...
VSD9410S251	8	Improvement of S-VHS Deviation (fo) Adjustment	E4T...
VSD9410S251	9	Reduction of Fan Motor Noise	E4T...
VSD9410S251	10	Prevention of Screws Contacting the Capstan	E4T...
VSD9410S251	11	Elimination of Part	E4T...
VSD9410S252	12	Change of TBC (1) C. B. A	F4T...
VSD9410S252	13	Change of VIDEO I/O C. B. A	F4T...
VSD9410S252	14	Change of SERVO/SYSCON C. B. A	F4T...
VSD9410S253	15	Elimination of Deleted Parts	F4T...
VSD9410S253	16	Improvement of Video Monitor Output Signal	F4T...
VSD9410S253	17	Change of Parts Number	F4T...
VSD9410S253	18	Change of EP-ROM (Ver.Up)	F4T...
VSD9410S253	19	Countermeasure of One Frame Editing	F4T...
VSD9410S253	20	Countermeasure for Distortion of Chroma	F4T...
VSD9410S253	21	Countermeasure for Low Chroma	F4T...
VSD9410S253	22	Expansion of System SC Phase Adjustment Range	G4T...
VSD9410S253	23	Expansion of Y/C Timing Adjustment Range	G4T...
VSD9410S253	24	Change of IC	G4T...
VSD9410S253	25	Change of EP-ROM (Ver.Up)	G4T...
VSD9410S253	26	Accidental Erasure of Y-DNR Latch	G4T...
VSD9410S254	27	Transistor Change	H4T...
VSD9410S255	28	Change of IC	H4T...
VSD9410S255	29	Expansion of Carrier Balance Adjustment Range	H4T...
VSD9410S255	30	Countermeasure of No Picture or Black Streaking	H4T...
VSD9410S256	31	Countermeasure of Random Sparkling Noise	H4T...
VSD9410S256	32	Change of Specification for Adjustment	H4T...
VSD9410S257	33	Change of Parts List	I4T...
VSD9410S257	34	Change of EP-ROM (Ver.Up)	I4T...
VSD9410S258	35	Addition of Connector	I4T...
VSD9410S258	36	Countermeasure for Color Change	I4T...
VSD9410S258	37	Change of IC	J4T...
VSD9410S258	38	Improvement of Distortion of Hecdphones Output (Mod1)	J4T...
VSD9410S258	39	Improvement of Distortion of Hecdphones Output (Mod2)	L4T...
VSD9410S258	40	Improvement of One Frame Editing	J4T...
VSD9410S258	41	Countermeasure for Black output in Jog Mode	J4T...
VSD9410S258	42	Countermeasure for Accidental Latch of Y-DNR	J4T...
VSD9412S259	43	Change of Mechanical Parts	C4T...
VSD9501S286	44	Change of TBC (1) C. B. A	K4T...
VSD9501S286	45	Reduction of Jitter	K4T...
VSD9501S286	46	Countermeasure for Flicker	K4T...
VSD9501S286	47	Reduction of Skew at Edit Point	K4T...
VSD9501S286	48	Expansion of SYSTEM SC PHASE ADJ. Range	L4T...
VSD9501S286	49	Addition of ACK Function & Improvement of Y Signal Chara	L4T...
VSD9501S286	50	Change of Mechanical Parts	L4T...

Order No	Bulletin No	Subject	Effective from
VSD9501S286	51	Elimination of CAC Y/C Timing Adjustment	L4T...
VSD9501S286	52	Improvement of Low Video Signal Recording	L4T...
VSD9501S286	53	Countermeasure of Holizontal Line	L4T...
VSD9501S286	54	Improvement of Video Frequency Response	L4T...
VSD9501S286	55	Change of Part	L4T...
VSD9501S294	56	Improvement of Cassette Compartment	C5T...
VSD9503S231	57	Correction of Service Manual	
VSD9506S201	58	Countermeasure of P.C.Board Crack	B5T...
VSD9506S201	59	Change of IC	B5T...
VSD9506S201	60	Change of EP-ROM (Ver.Up)	B5T...
VSD9506S201	61	Change of Microcomputer	B5T...
VSD9506S215	62	Countermeasure of Y-DNR Mulfunction	B5T...
VSD9506S215	63	Change of EP-ROM(Ver.Up)	B5T...
VSD9506S215	64	Improvement of the Motor Drive Circuit	B5T...
VSD9506S215	65	Prevention of Sync-generator Mulfunction	B5T...
VSD9506S216	66	Change of Microcomputer	B5T...
VSD9506S216	67	Prevention of Audio No Recording	B5T...
VSD9506S217	68	Change of Capaciror	B5T...
VSD9506S219	69	Change of Part	D5T...
VSD9506S220	70	Inprovement of Picture Quality	E5T...
VSD9605S205	74	Countermeasure of Time code Mulfunction	B5T...
VSD9605S206	75	Change of SERVO & SYSTEM CONTROL C.B.A.	E5T...
VSD9605S206	76	Change of TBC (1) C.B.A.	E5T...
VSD9605S207	77	Change of Head Amp C. B. A	B5T...

2. AG-DS840P SUPPLEMENTS

Order No	Bulletin No	Subject	Effective from
VSD9410S256	1	Countermeasure of Random Sparkling Noise	H4T...
VSD9410S256	2	Change of Specification for Adjustment	H4T...
VSD9410S258	3	Addition of Connector	I4T...
VSD9410S258	4	Countermeasure for Color Change	I4T...
VSD9410S258	5	Change of IC	J4T...
VSD9410S258	6	Improvement of Distortion of Hecdphones Output (Mod1)	J4T...
VSD9410S258	7	Improvement of Distortion of Hecdphones Output (Mod2)	L4T...
VSD9410S258	8	Improvement of One Frame Editing	J4T...
VSD9410S258	9	Countermeasure for Black output in Jog Mode	J4T...
VSD9410S258	10	Countermeasure for Accidental Latch of Y-DNR	J4T...
VSD9412S259	11	Change of Mechanical Parts	C4T...
VSD9501S286	12	Change of TBC (1) C. B. A	K4T...
VSD9501S286	13	Reduction of Jitter	K4T...
VSD9501S286	14	Countermeasure for Flicker	K4T...
VSD9501S286	15	Reduction of Skew at Edit Point	K4T...
VSD9501S286	16	Expansion of SYSTEM SC PHASE ADJ. Range	K4T...
VSD9501S286	17	Improvement of Y Signal characteristics	K4T...
VSD9501S286	18	Change of Mechanical Parts	L4T...
VSD9501S286	19	Elimination of CAC Y/C Timing Adjustment	L4T...
VSD9501S286	20	Countermeasure of Holizontal Line	L4T...
VSD9501S286	21	Improvement of Video Frequency Response	L4T...
VSD9501S286	22	Change of Part	L4T...
VSD9501S294	23	Improvement of Cassette Compartment	C5T...
VSD9506S201	24	Countermeasure of P.C.Board Crack	B5T...
VSD9506S201	25	Change of IC	B5T...
VSD9506S201	26	Change of EP-ROM (Ver.Up)	B5T...
VSD9506S201	27	Change of Microcomputer	B5T...
VSD9506S215	28	Countermeasure of Y-DNR Mulfunction	B5T...
VSD9506S215	29	Change of EP-ROM(Ver.Up)	B5T...
VSD9506S215	30	Improvement of the Motor Drive Circuit	B5T...
VSD9506S215	31	Prevention of Sync-generator Mulfunction	B5T...
VSD9506S217	32	Change of Capaciror	B5T...
VSD9506S219	33	Change of Part	D5T...
VSD9506S220	34	Inprovement of Picture Quality	E5T...
VSD9605S206	37	Change of SERVO & SYSTEM CONTROL C.B.A.	E5T...
VSD9605S206	38	Change of TBC (1) C.B.A.	E5T...

Exploded Views & Parts Lists

NOTES

1. • Be sure to make your orders of replacement parts according to this list.
   • '<R>' in Remark column indicates recommended parts.
   • '<M>' in Remark column indicates needed in the periodical maintenance.
2. IMPORTANT SAFETY NOTICE
   Components identified by '<!>' have special characteristics important for safety.
   When replacing any of these components, use only the original ones.
   Meaning of symbol '<!>' on this parts list is exactly the same as symbol ⚠ on Schematic and Circuit Board Diagrams.
3. Unless otherwise specified ;
   All resistors are in (Ω), K=1,000Ω, M=1,000kΩ.
   All capacitors are in (F), U=10^{-6} F, P=10^{-12} F.
4. ITEM NUMBERS WITH CAPITAL LETER E
   Item numbers with capital leter E (Example:E1, E2,...) in Ref.No. column mean that the parts are listed with the E item numbers in the exploded views.
5. The main assembled parts are shown below C.B.A. marked with '■'.
6. When ordering parts, use parts No. only form Part No. column.
7. Printed circuit board assembly with mark (RTL) is no longer available after discontinuation of the product.
8. Abbreviations for parts ;

-- NAME --	-- DESCRIPTION --
C.CAPACITOR	CERAMIC CAPACITOR
C.CAPACITOR CH	CERAMIC CHIP CAPACITOR
E.CAPACITOR	ELECTROLYTIC CAPACITOR
G.CAPACITOR	GLASS CAPACITOR
M.CAPACITOR	MICA CAPACITOR
P.CAPACITOR	PLASTIC FILM CAPACITOR
S.CAPACITOR	SEMI-CONDUCTOR CAPACITOR
T.CAPACITOR	TANTALUM CAPACITOR
TRIMMER	TRIMMER
C.RESISTOR	CARBON RESISTOR
F.RESISTOR	FUSE RESISTOR
M.RESISTOR	METAL OXSIDE RESISTOR
M.RESISTOR CH	METAL OXSIDE CHIP RESISTOR
S.RESISTOR	SOLID RESISTOR
V.RESISTOR	VARIABLE RESISTOR
W.RESISTOR	WIRE WOUND RESISTOR
COMBI. TR-R	TRANSITOR-RESISTOR COMBINATION PARTS
COMBI. R-R	RESISTOR-RESISTOR COMBINATION PARTS
COMBI. C-R-L	CAPACITOR-COIL COMBINATION PARTS
C.B.A.	CIRCUIT BOARD ASSEMBLY

SERVICING FIXTURE & TOOL LIST

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
	VFM8080HQFP	VHS ALIGNMENT TAPE	1	
	VFK0329	POST ADJ. SCREWDRIVER	1	
	VFK0132	BACK TENSION METER	1	(T2-H7-UM)
		(TENTELOMETER,		
		MADE IN U.S.A.)		
	VFK0191	POST ADJ. PLATE	1	
	VFK0133	DIAL TORQUE GAUGE	1	
	VFK0180	PLASTIC CLAMPER ONLY	1	
	VFK0134	ADAPTOR FOR VFK0133	1	
	VFK0190	REEL TABLE HEIGHT GAUGE	1	
	VFK0236	TENSION POST ADJ. FIXTURE	1	
	VFK0806	TENSION SENSOR ADJ. FIXTURE	1	
	VFK0328	H-POSITION ADJ. SCREWDRIVER	1	
	VFK0330	FINE ADJ. SCREWDRIVER	1	
		(3mm PHI)		

Ref.No.	Part No.	Part Name & Description	Pcs	Rena rks
	VFK0325	RETAINING RING REMOVER	1	
		(3mm/4mm)		
	VFK0326	HEX. WRENCH SET	1	
	MOR265	MOLYTONE GREASE	1	
	VFK0680	S.C.R. GREASE	1	
	VFK27	HEAD CLEANING STICK	1	
	VFK0344	POST HEIGHT ADJ. FIXTURE	1	
	VFK0269	L TYPE SCREWDRIVER	1	
	VFK66	FAN TYPE TENSION GAUGE	1	
	VFK0941	EXTENDER BOARD 100P	1	
	VFK0942	EXTENDER CODE 13P	1	
	VFK0685	EXTENDER CODE 40P	1	
	VFK0829	EXTENDER BOARD 64P	1	

EXPLODED VIEWS

PACKING PARTS SECTION

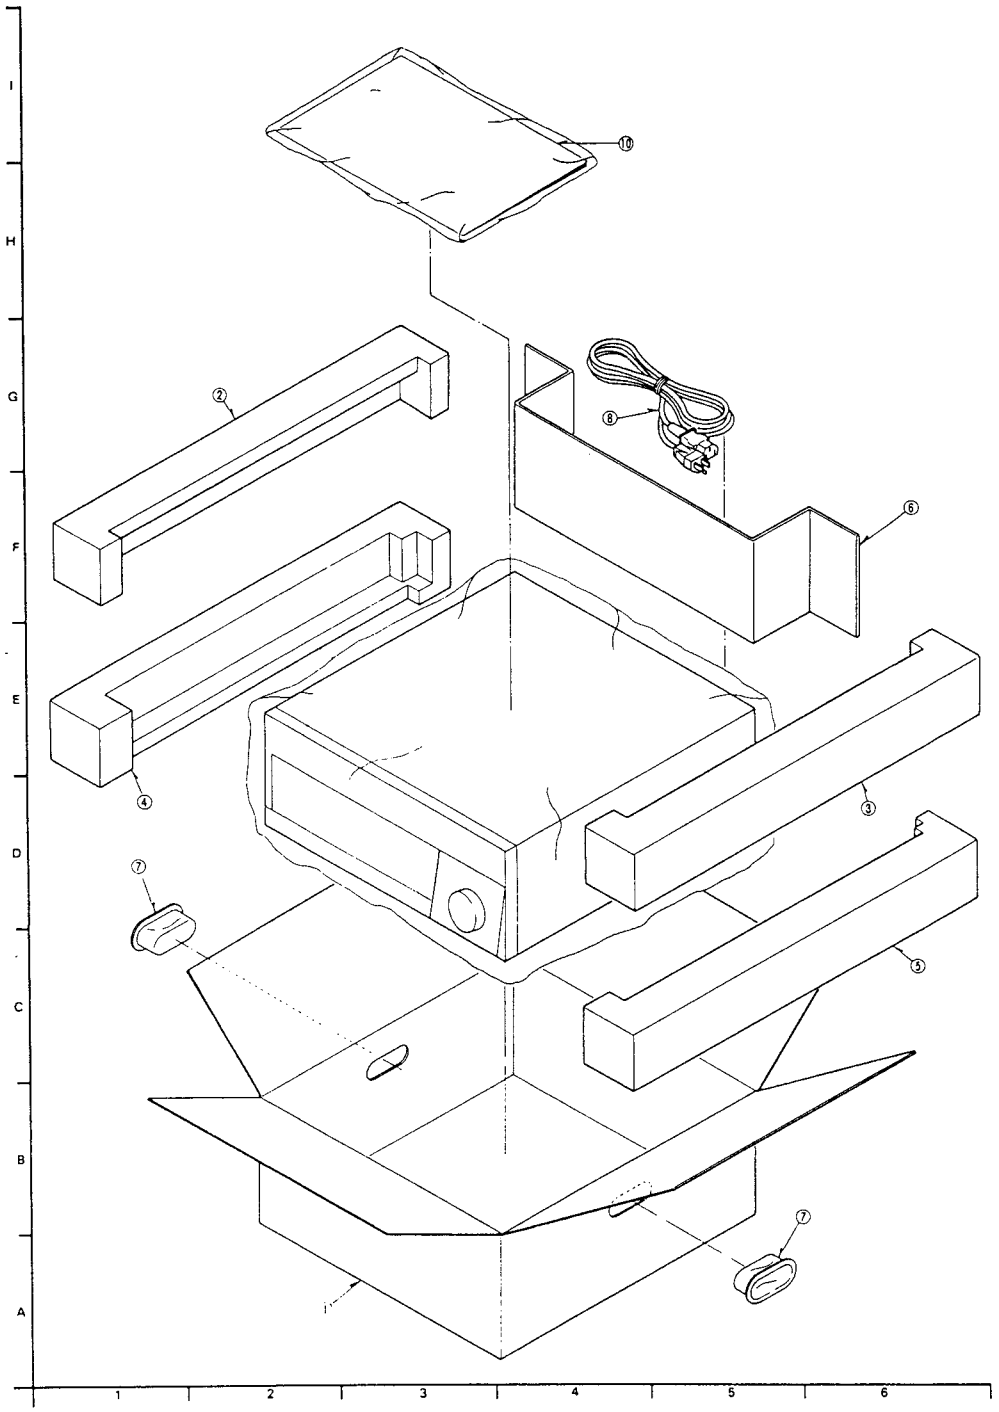

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
6-1	VPG8174	PACKING CASE	1	FOR AG-DS850HP
6-1	VPG8183	PACKING CASE	1	FOR AG-DS840HP
6-2	VPN3799	CUSHION (LEFT TOP)	1	
6-3	VPN3801	CUSHION (RIGHT TOP)	1	
6-4	VPN3802	CUSHION (LEFT BOTTOM)	1	
6-5	VPN3803	CUSHION (RIGHT BOTTOM)	1	
6-6	VPN3899	PAD	1	
6-7	VPF0149	HANDLE	2	
6-8	VJA0488	POWER CORD	1	
6-10	VQT5493	OPERATING INSTRUCTIONS	1	FOR AG-DS850HP
6-10	VQT5832	OPERATING INSTRUCTIONS	1	FOR AG-DS840HP

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks

1. CHASSIS PARTS SECTION

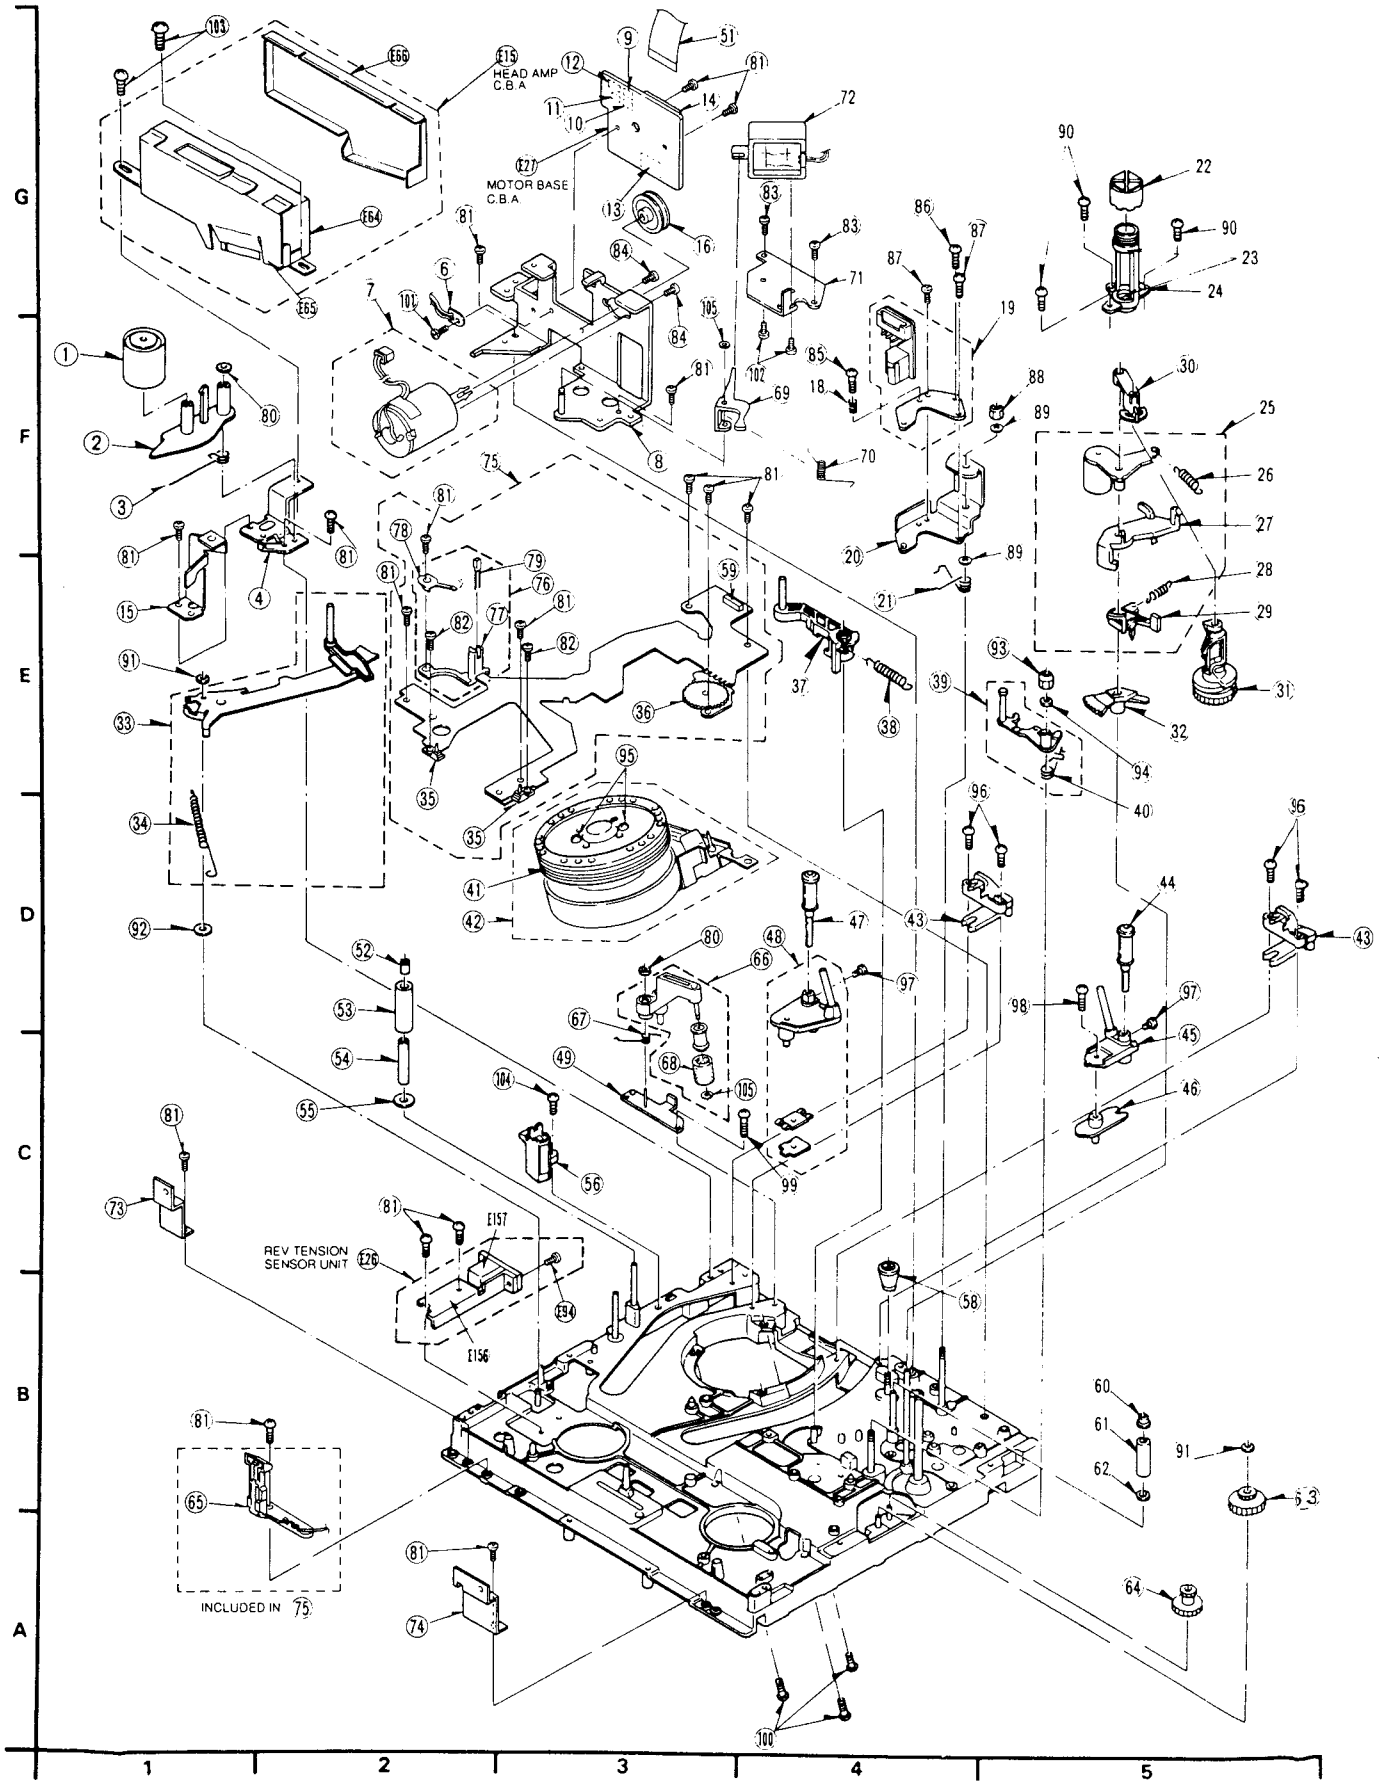

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
1-1	VXP1092	IMPEDANCE ROLLER UNIT	1	
1-2	VML2856	IMPEDANCE ROLLER ARM	1	
1-3	VMB1976	IMPEDANCE SPRING	1	
1-4	VMA7982	HEAD AMP ANGLE (L)	1	
1-6	VEK3185	HUMIDITY RESISTOR UNIT	1	
1-7	VEM0360	LOADING MOTOR UNIT	1	<!>
1-8	VXA5151	MOTOR BASE (1) UNIT	1	
1-9	VJP1229G	CONNECTOR (2P)	1	
1-10	VJP1229T	CONNECTOR (2P)	1	
1-11	VJP1229R	CONNECTOR (2P)	1	
1-12	VJP1230R	CONNECTOR (3P)	1	
1-13	VJP3106B013	CONNECTOR (13P)	1	
1-14	VSJ1493	CONNECTOR (15P)	1	
1-15	VMA9024	IMPEDANCE ROLLER SUPPORT ANGLE	1	
1-16	VDP1319	MOTOR PULLEY	1	
1-18	VMB1251	ADJUST SPRING	1	
1-19	VED0145	A/C HEAD (1) UNIT	1	
1-20	VXA3649	A/C HEAD BASE UNIT	1	
1-21	VMB1567	A/C HEIGHT SPRING	1	
1-22	VXQ0094	THRUST SCREW UNIT	1	
1-23	VMX1567	OIL SEAL	2	
1-24	VXD0120	HOUSING UNIT	1	
1-25	VXL2367	PRESSURE ROLLER UNIT	1	
1-26	VMB1977	PINCH PRESSURE SPRING	1	
1-27	VXL2368	PINCH PRESSURE ARM	1	
1-28	VMB1569	PINCH ARM SPRING	1	
1-29	VML1874	PINCH LIFT ARM	1	
1-30	VMX1353	PINCH CAM ARM	1	
1-31	VDG0577	PINCH CAM	1	
1-32	VDG0651	PINCH SECTOR GEAR	1	
1-33	VXL2089	TENSION ARM UNIT	1	
1-34	VMB1975	TENSION SPRING	1	
1-35	VSP0293	CASSETTE DETECT SW	2	
1-36	VSS0257	MODE SWITCH	1	
1-37	VXL1857	SUB LOADING ARM (1) UNIT	1	
1-38	VMB1566	SUB POST SPRING	1	
1-39	VXL2074	P5 ARM UNIT	1	
1-40	VMB1554	P5 SPRING	1	
1-41	VEH0645	UPPER CYLINDER UNIT	1	
1-42	VEG1109	LOWER CYLINDER UNIT	1	
1-43	VMD0910	POST STOPPER	2	
1-44	VXP1264	ROLLER POST (1) UNIT	1	
1-45	VXA3213	INCLINED BASE (T)(1) UNIT	1	
1-46	VXA2687	INCLINED ADJUSTMENT PLATE U	1	
1-47	VXP1263	ROLLER POST (S) UNIT	1	
1-48	VXA3249KIT	INCLINED BASE (S)	1	
1-49	VXA3980	HEAD CLEANING PLATE	1	
1-51	VEE8714	FLEXIBLE CABLE	1	
1-52	VMX1088	SUPPLY UPPER LIMITER	1	
1-53	VDP1533	SUPPLY ROLLER	1	
1-54	VMX1581	P1 COLLAR	1	
1-55	VMX1533	SUPPLY LOWER LIMITER	1	
1-56	VBS0038	FE HEAD	1	
1-58	VHN0110	ADJUST NUT	1	
1-59	VJS2964A013	CONNECTOR (15P)	1	
1-60	VMX1544	P4 UPPER LIMITER	1	
1-61	VMX1568	P4 SLEEVE	1	
1-62	VMX1534	P4 LOWER LIMITER	1	
1-63	VDG0664	CONNECTION GEAR	1	
1-64	VDG0483	PINCH SPEED DOWN GEAR	1	
1-65	VES0489	SAFETY SWITCH	1	
1-66	VXL2263	HEAD CLEANING UNIT	1	
1-67	VMB2532	CLEANING SPRING	1	
1-68	VMT0321	HEAD CLEANING PAD	1	
1-69	VML2845	CAM LEVER	1	
1-70	VMB2672	CAM LEVER SPRING	1	
1-71	VMA8977	SOLENOID BASE	1	
1-72	VSJ0111	PINCH SOLENOID	1	
1-73	VMA6895	MOUNT PLATE (L)	1	
1-74	VMA6896	MOUNT PLATE (R)	1	
1-75	VXA5165	BIND FLEXIBLE UNIT	1	
1-76	VXA3520	LED UNIT	1	
1-77	VMD0911	LED HOLDER	1	

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
1-78	VMB2020	EARTH SPRING	1	
1-79	GL450	LED	1	
1-80	VMX1079	CUT WASHER	2	
1-81	XTV26+6F	SCREW	14	
1-82	XTV2+4F	SCREW	2	
1-83	XYN26+K5	SCREW	2	
1-84	XSN3+3.5	SCREW	2	
1-85	VHD0322	SCREW	1	
1-86	VHD0089B	SCREW	1	
1-87	XSN3D6FZ	SCREW	2	
1-88	VHN0063	M4 NYLON NUT	1	
1-89	XWE4	M4 NYLON WASHER	2	
1-90	VHD0374	SCREW	3	
1-91	VMX0653	CUT WASHER	2	
1-92	XWGV3D6G	POLLY SLIDER WASHER	1	
1-93	VHD0045	M3 NYLON NUT	1	
1-94	XWE3VW	M3 WASHER	1	
1-95	VHD0425	SCREW	2	
1-96	XTV26+10F	SCREW	4	
1-97	VHD0133	SCREW	2	
1-98	XYN26+F6FZ	SCREW	1	
1-99	XTN3+6F	SCREW	1	
1-100	VHD0342	SCREW	3	
1-101	XTV2+6J	SCREW	1	
1-102	XYN26+C4	SCREW	2	
1-103	XTW3+8TR	SCREW	2	
1-104	XTV26+8E	SCREW	1	
1-105	VMX0653	CUT WASHER	11	

2. MOVING PARTS SECTION

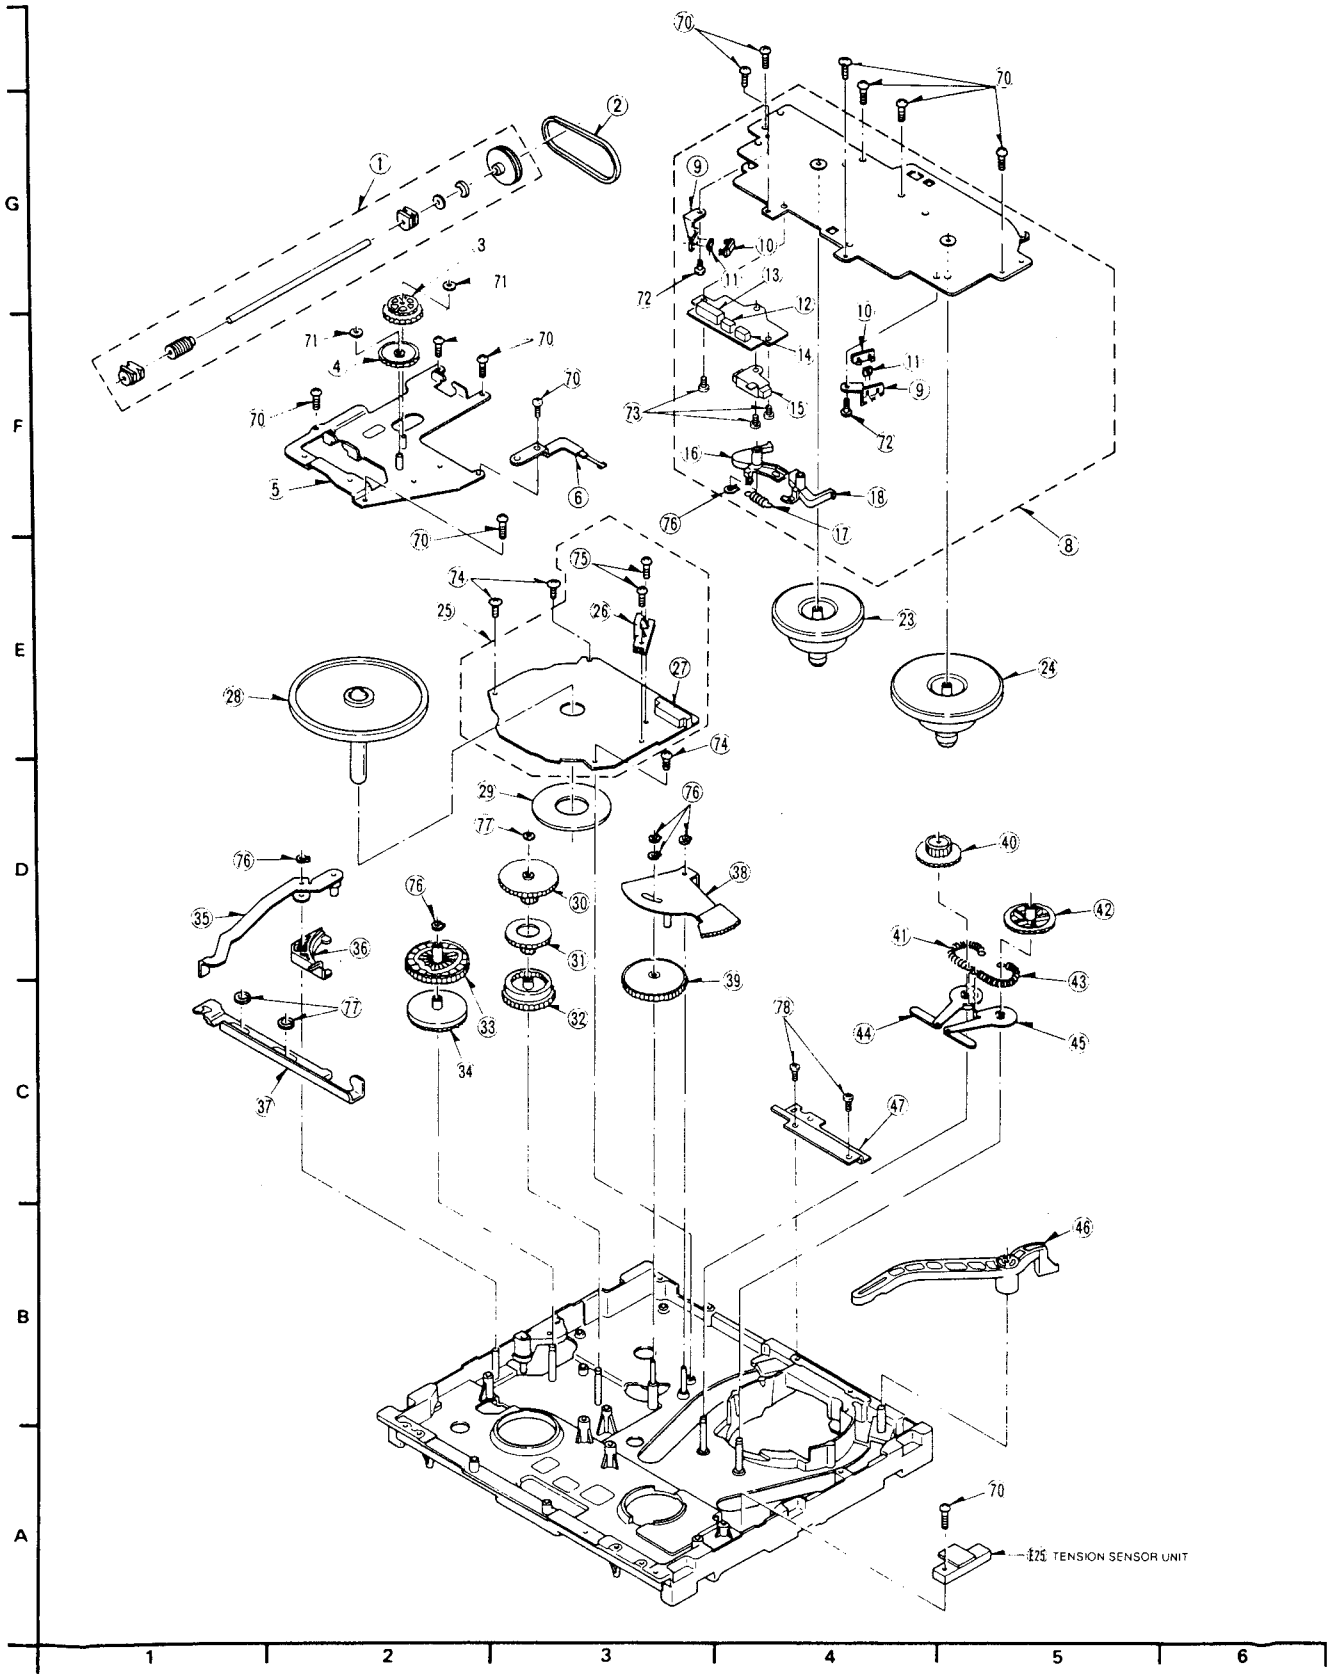

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
2-1	VXP1082	WORM SHAFT UNIT	1	
2-2	VDV0228	LOADING BELT	1	
2-3	VDG0581	WORM WHEEL	1	
2-4	VDG0582	INTERMEDIATE GEAR	1	
2-5	VXA3646	GEAR BASE (1) UNIT	1	
2-6	VXS0098	EARTH SPRING UNIT	1	
2-8	VXA4839	STATOR BASE UNIT	1	
2-9	VMD0611	FG SUPPORT (1)	2	
2-10	VMD0621	FG SUPPORT (2)	2	
2-11	HW-300B	HOLE IC	2	
2-12	VJP1230R	CONNECTOR (3P)	1	
2-13	VJP3202A0008Z	CONNECTOR (8P)	1	
2-14	VJP1230T	CONNECTOR (3P)	1	
2-15	VSJ0066	SOLENOID	1	<!>
2-16	VXZ0270	MAIN BRAKE (S) UNIT	1	
2-17	VMB1978	BRAKE SPRING	1	
2-18	VXZ0314	MAIN BLAKE (T) UNIT	1	
2-23	VXR0187	TAKEUP REEL TABLE UNIT	1	
2-24	VXR0225	SUPPLY REEL TABLE UNIT	1	
2-25	VEK6553	STATOR UNIT	1	
2-26	VBK0063	MR HEAD	1	
2-27	VJP1902	CONNECTOR	1	
2-28	VXP1456	ROTOR UNIT	1	
2-29	VMA6847	SUB PLATE	1	
2-30	VDG0580	CENTER GEAR	1	
2-31	VXP0878	RETANER GEAR UNIT	1	
2-32	VDG0342	RING GEAR	1	
2-33	VED0578	MAIN CAM GEAR	1	
2-34	VED0343	SUB CAM GEAR	1	
2-35	VXL1895	CAM FOLLOWER ARM UNIT	1	
2-36	VML1861	DETENT ARM	1	
2-37	VMM0218	MAIN ROD	1	
2-38	VXA3144	SECTOR GEAR UNIT	1	
2-39	VDG0579	LOADING CAM GEAR	1	
2-40	VED0420	LOADING GEAR (T)	1	
2-41	VMB1555	LOADING SPRING (T)	1	
2-42	VDG0593	LOADING GEAR (S)	1	
2-43	VMB1746	LOADING SPRING (S)	1	
2-44	VXL1489	LOADING ARM (T)(1) UNIT	1	
2-45	VXL1487	LOADING ARM (S)(1) UNIT	1	
2-46	VML2304	CLEANING ROD	1	
2-47	VMA8003	MOUNT PLATE (B)	1	
2-70	XTV26+6F	SCREW	12	
2-71	VMX0653	CUT WASHER	2	
2-72	XYN2+F5	SCREW	2	
2-73	XSN26+4	SCREW	3	
2-74	XYEV0004	SCREW	3	
2-75	XYNV0015	SCREW	2	
2-76	XUEV3W	CAT WASHER	6	
2-77	XUEV3W	CUT WASHER	3	
2-78	XTV3+8F	SCREW	2	

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks

3. CASSETTE COMPARTMENT SECTION

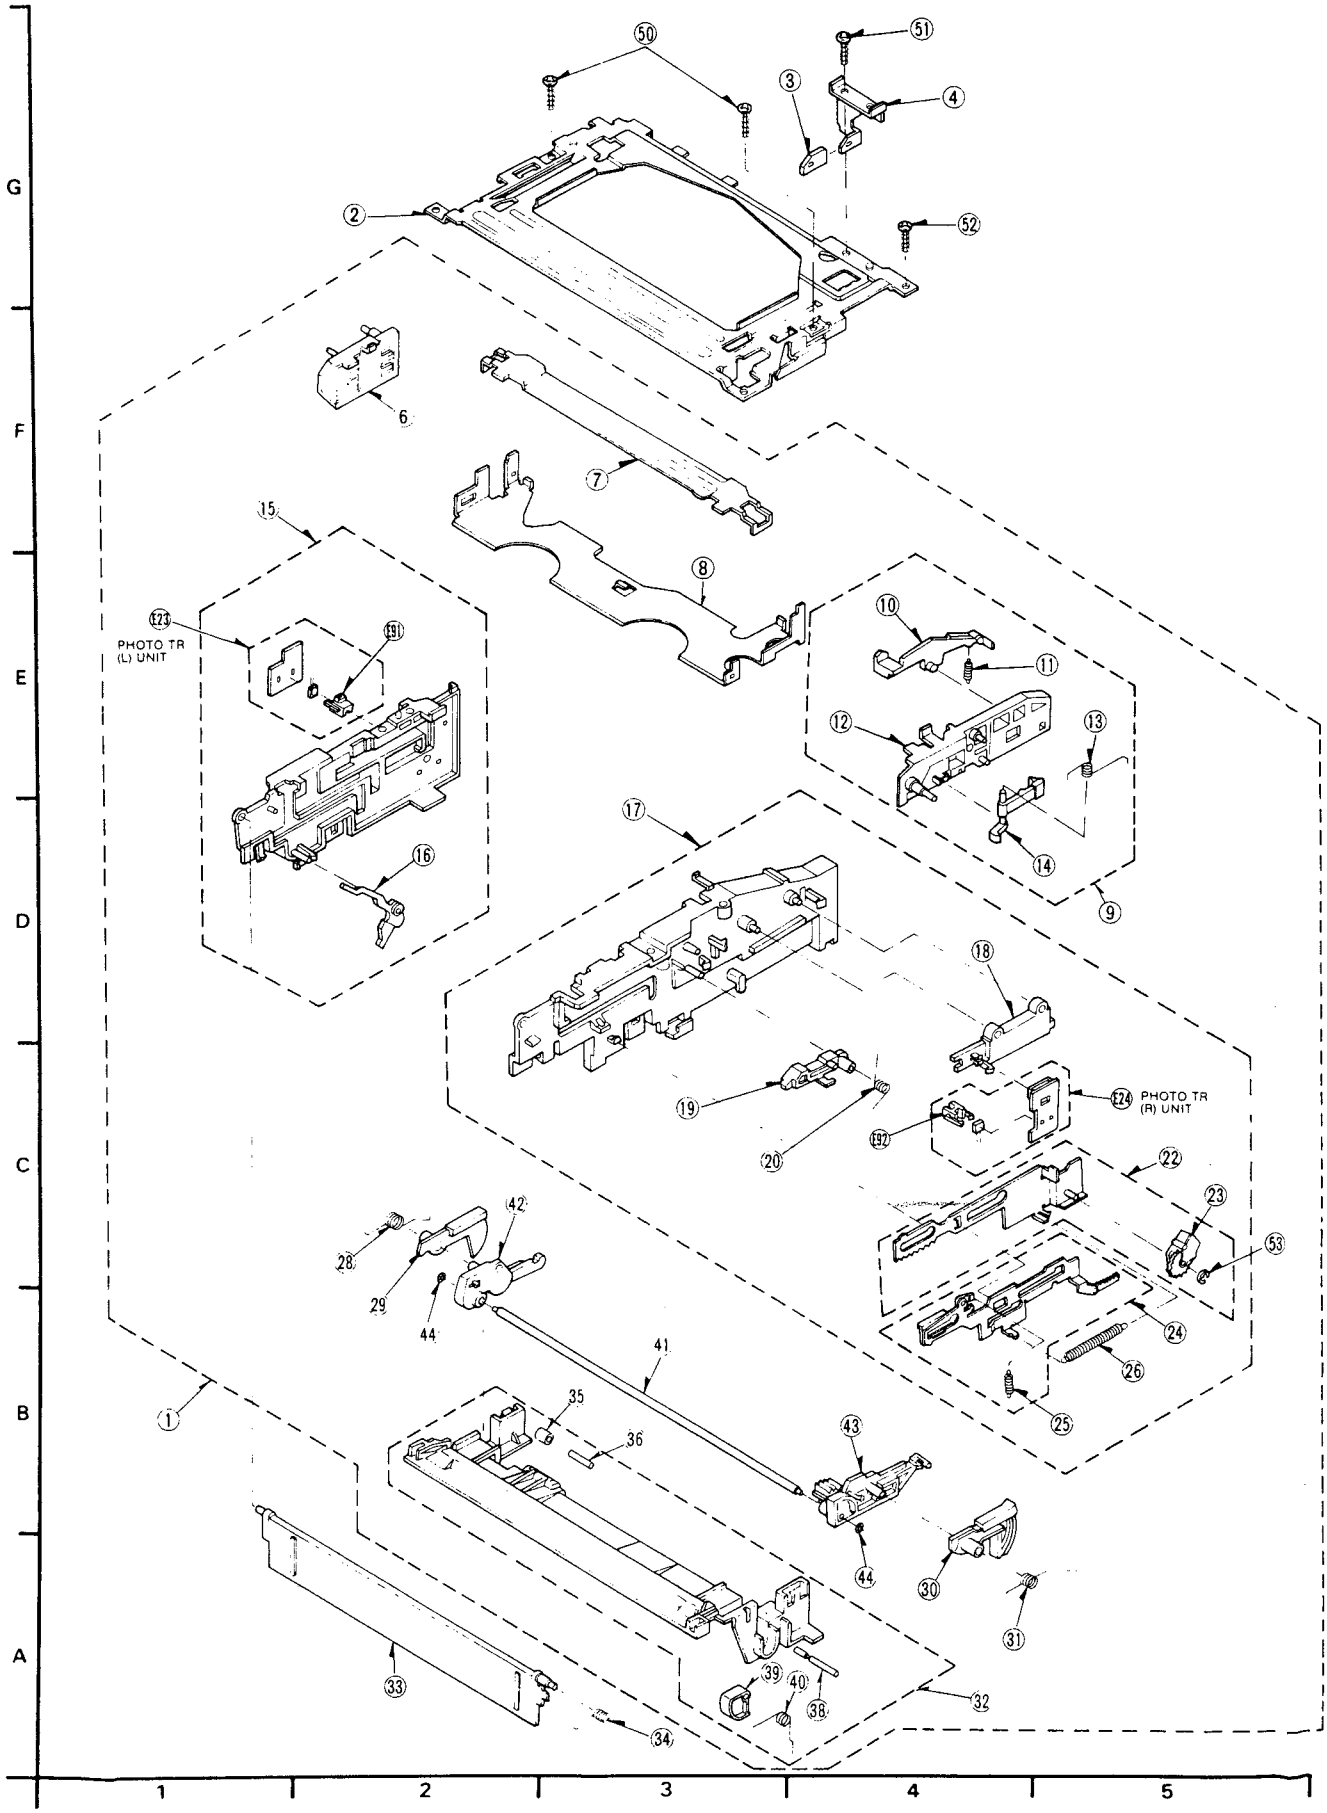

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
3-1	VXA5356	CASSETTE COMPERTMENT UNIT	1	
3-2	VMA8166	TOP PLATE	1	
3-3	VMD2341	CASSETTE HOLDER CAP	1	
3-4	VMA7992	CASSETTE HOLDER ANGLE	1	
3-6	VMD1387	HOLDER GUIDE (L)	1	
3-7	VXA3691	HOLDER ANGLE UNIT	1	
3-8	VMA7989	CASSETTE HOLDER	1	
3-9	VXA3692	HOLDER GUIDE (R) UNIT	1	
3-10	VML1882	DOOR OPEN LEVER	1	
3-11	VMG1584	DOOR OPEN LEVER SPRING	1	
3-12	VMD1386	HOLDER GUIDE (R)	1	
3-13	VMB2063	RELEASE SPRING	1	
3-14	VML2306	RELEASE LEVER	1	
3-15	VXA3694	SIDE PLATE (L) UNIT	1	
3-16	VML2305	OPENER LEVER	1	
3-17	VXA3693	SIDE PLATE (R) UNIT	1	
3-18	VSS0258	SLIDE SWITCH	1	
3-19	VML2288	DOWN SUPPORT LEVER	1	
3-20	VMB1961	DOWN SUPPORT SPRING	1	
3-22	VXA3696	MAIN RACK UNIT	1	
3-23	VDG0737	DAMPER	1	
3-24	VXA3697	SUB RACK UNIT	1	
3-25	VMB1780	RACK C SPRING	1	
3-26	VMB1997	CLUTCH SPRING	1	
3-28	VMB1999	SUB WIPER SPRING (L)	1	
3-29	VML1878	SUB WIPER ARM (L)	1	
3-30	VML1879	SUB WIPER ARM (R)	1	
3-31	VMB1998	SUB WIPER SPRING (R)	1	
3-32	VXA5361	CASSETTE GUIDE UNIT	1	
3-33	VKF1273	BLINDER PANEL	1	
3-34	VMB1258	BLINDER SPRING	1	
3-35	VDP1398	CASSETTE ROLLER	1	
3-36	VMS5505	ROLLER SHAFT	1	
3-38	VMS4644	SHAFT	1	
3-39	VMD1773	CASSETTE SUPPORT	1	
3-40	VMB2329	SUPPORT SPRING	1	
3-41	VMS3182	MAIN SHAFT	1	
3-42	VML1876	WIPER ARM (L)	1	
3-43	VML1877	WIPER ARM (R)	1	
3-44	VHN0068	STOPPING WASHER	2	
3-50	XTV26+8G	SCREW	2	
3-51	XTV26+6F	SCREW	1	
3-52	XTV3+8G	SCREW	1	
3-53	XUC2.5FP	E RING	1	

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks

4. CHASSIS & FRAME SECTION

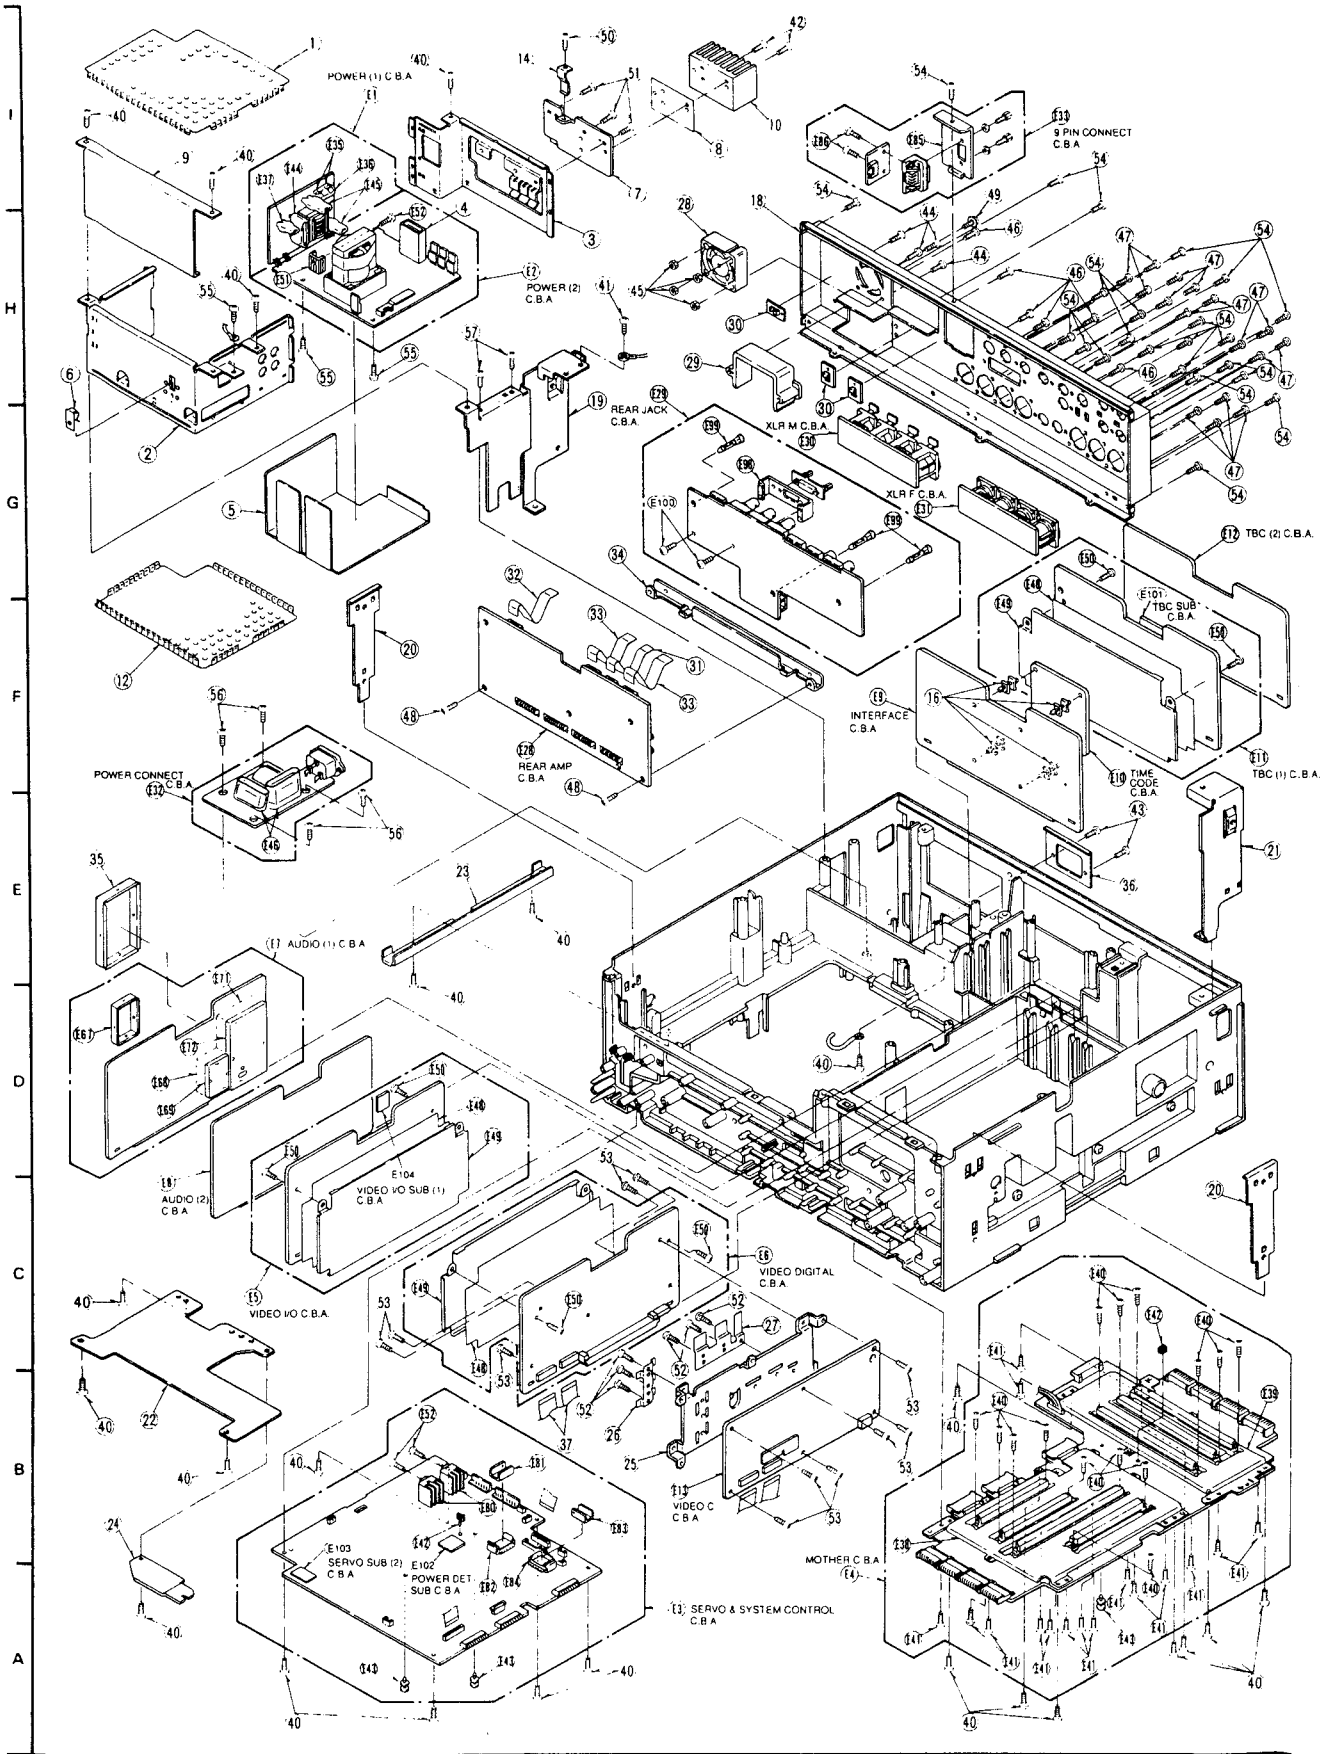

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
4-1	VSC3961	POWER UNIT SHIELD CASE	1	
		(UPPER)		
4-2	VSC3963	POWER SHIELD CASE (MIDDLE	1	
		(A))		
4-3	VSC3964	POWER SHIELD CASE (MIDDLE	1	
		(B))		
4-4	VWZ0103	INSULATION TUBE	1	
4-5	VMZ2224	INSULATION SHEET	1	
4-6	VMC0357	TR SPRING	1	
4-7	VSC3965	POWER SHIELD PLATE	1	
4-8	VMT0534	INSULATION SHEET	1	
4-9	VSC4195	POWER SHIELD SHEET	1	
4-10	VSC3966	HEAT SINK	1	
4-12	VSC3962	POWER SHIELD CASE (LOWER)	1	
4-14	VMP3083	TR HOLDER	1	
4-16	VJH0632	C.B. HOLDER	4	
4-18	VJH0943	REAR JACK PLATE	1	FOR AG-DS850HP
4-18	VJH0944	REAR JACK PLATE	1	FOR AG-DS840HP
4-19	VMP3221	TOP ANGLE (LEFT)	1	
4-20	VXA4649	SIDE ANGLE UNIT	2	
4-21	VMP3222	TOP ANGLE (RIGHT)	1	
4-22	VMP3216	MECHANISM SHIELD PLATE	1	
4-23	VMP3232	POWER CORD SHIELD ANGLE	1	
4-24	VMP3750	SUPPORT ANGLE	1	
4-25	VSC3975	C.B. HEAT SINK	1	
4-26	VMC0979	HEAT SINK PLATE (1)	1	
4-27	VMC0980	HEATSINK PLATE (2)	1	
4-28	VRF0085	FAN MOTOR	1	
4-29	VGF0507	AC INLET GUARD	1	
4-30	VJF0977	CABLE CLIP	3	
4-31	VWJ08AW070M0	FLEXIBLE CABLE	1	
4-32	VWJ10AQ070M0	FLEXIBLE CABLE	1	
4-33	VWJ12AW070M0	FLEXIBLE CABLE	2	
4-34	VMP4224	REAR AMP ANGLE	1	
4-35	VSC3970	SHIELD COVER (UPPER)	1	
4-36	VMP4246	AC INLET ANGLE	1	
4-37	VWJ18XW040L0	FLEXIBLE CABLE	2	
4-40	XTV3+10JFR	SCREW	24	
4-41	XYE4+EF6	SCREW	1	
4-42	XYN26+C12FZ	SCREW	2	
4-43	XYN3+F12FZ	SCREW	2	
4-44	VHD0856	SCREW	4	
4-45	XNG3B	NUT	4	
4-46	XTV3+8GFZ	SCREW	6	
4-47	XSN26+6FZ	SCREW	16	
4-48	XTV3+8FFR	SCREW	2	
4-49	VHD0426	SCREW	1	
4-50	XYN3+C8	SCREW	1	
4-51	XTS3+8F	SCREW	3	
4-52	XSB2+4FZ	SCREW	6	
4-53	XTV3+6FFR	SCREW	11	
4-54	XTV3+8FFZ	SCREW	23	
4-55	XYE3+EF8FR	SCREW	3	
4-56	XTW3+10TFR	SCREW	4	
4-57	XTV3+10J	SCREW	2	
4-58	VSC4186	SHIELD PLATE	1	
4-60	XWA35BFZ	WASHER	4	
4-61	XWE35FZ	WASHER	4	

5. CASING PARTS SECTION

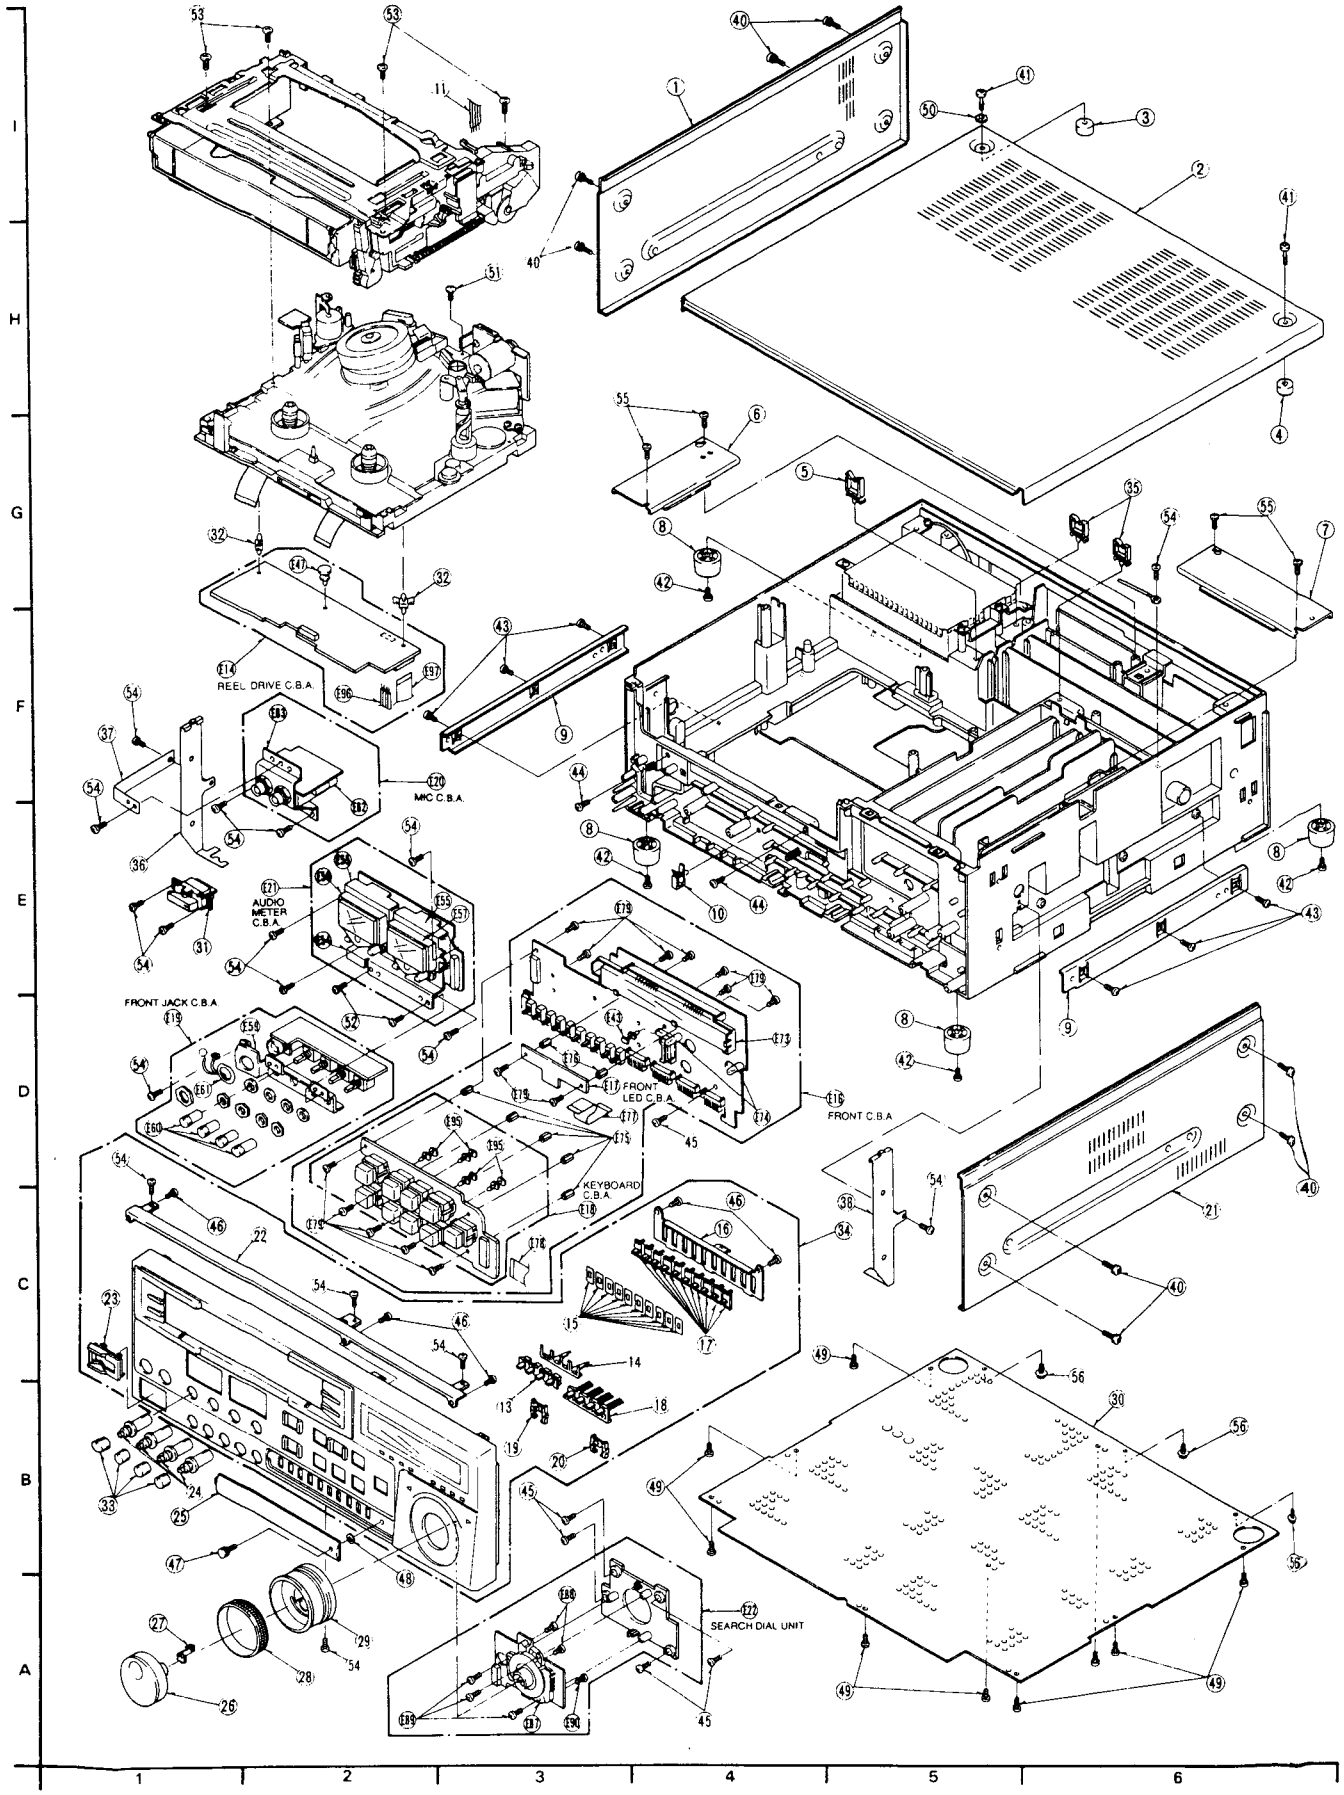

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
5-1	VGM1048	SIDE PANEL (LEFT)	1	
5-2	VGM1047	TOP PANEL	1	
5-3	VMX2248	TOP PANEL SPACER	1	
5-4	VMX0871	TOP PANEL SPACER	1	
5-5	VJF0004	MINI CLAMPER	2	
5-6	VMP4225	C.B. HOLDER (1)	1	
5-7	VMP4226	C.B. HOLDER (2)	1	
5-8	VKA0117	RUBBER FOOT	4	
5-9	VXA4551	SUPPORT ANGLE UNIT	2	
5-10	VJF0013	MINI CLAMPER	1	
5-11	VWJ04CN150CA	FLAT CABLE	1	
5-13	VGU6485	OPERATION BUTTON	4	FOR AG-DS850HP
5-13	VGU6725	OPERATION BUTTON	4	FOR AG-DS840HP
5-14	VKC0423	OPERATION BUTTON HOLDER	1	
5-15	VGF0508	SLIDE KNOB SHEET	10	PCS:9 AG-DS840HP
5-16	VMP3226	KNOB HOLD ANGLE	1	
5-17	VGU5603	SLIDE KNOB	10	PCS:9 AG-DS840HP
5-18	VGU6483	COUNTER BUTTON	1	
5-19	VGL0508	REV. PANELIGHT	1	
5-20	VGL0506	FWD PANELIGHT	1	
5-21	VGM1049	SIDE PANEL (RIGHT)	1	
5-22	VMP3225	FRONT SUPPORT ANGLE	1	
5-23	VKW1501	POWER SWITCH COVER	1	
5-24	VGU6482	VR KNOB	4	FOR AG-DS850HP
5-25	VKW1839	OPERATION AREA COVER	1	
5-26	VGU4604	JOG DIAL KNOB	1	
5-27	VMC0444	KNOB SPRING	1	
5-28	VMG0476	SEARCH DIAL RUBBER	1	
5-29	VGU4605	SERCH DIAL KNOB	1	
5-30	VKM3678	BOTTOM PLATE	1	
5-31	VES0703	POWER SWITCH UNIT	1	
5-32	VJF0726	C.B. SUPPORT	2	
5-33	VMG0477	VR KNOB CAP	4	FOR AG-DS850HP
5-34	VYP5627	FRONT PANEL UNIT	1	FOR AG-DS850HP
5-34	VYP5664	FRONT PANEL UNIT	1	FOR AG-DS840HP
5-35	VJF0004	MINI CLAMPER	2	
5-36	VMP3648	EARTH PLATE (LEFT)	1	
5-37	VMP3650	MIC EARTH PLATE	1	
5-38	VMP3649	EARTH PLATE (RIGHT)	1	
5-40	VHD0426	SCREW	8	
5-41	VHD0222	SCREW	2	
5-42	XTV3+16G	SCREW	4	
5-43	XTV3+10J	SCREW	6	
5-44	XTV4+8F	SCREW	2	
5-45	XTV4+10JFR	SCREW	5	
5-46	XTV3+8J	SCREW	5	
5-47	VHD0679	SCREW	1	
5-48	VMX1558	STOPPING WASHER	1	
5-49	VHD0059	SCREW	9	
5-50	XWC4BFY	WASHER (M4)	1	
5-51	XTV4+12J	SCREW	1	
5-52	XTV3+8F	SCREW	2	
5-53	XTV26+8FR	SCREW	4	
5-54	XTV3+10JFR	SCREW	16	
5-55	XYN3+8FR	SCREW	4	
5-56	XYE3+EF6	SCREW	3	

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks

ELECTRICAL REPLACEMENT PARTS LIST

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
E6	VEP03A67C	P.C.BOARD W/COMPONENT	1	(RTL)<R>
		VIDEO DIGITAL		
	VEP03B61A	P.C.BOARD W/COMPONENT	1	(RTL)<R>
		DIGITAL SUB		FOR VEP03A67C
E13	VEP08166C	P.C.BOARD W/COMPONENT	1	(RTL)<R>
		VIDEO C		AG-DS850HP
E13	VEP08166D	P.C.BOARD W/COMPONENT	1	(RTL)<R>
		VIDEO C		AG-DS840HP
	VEP00X85A	P.C.BOARD W/COMPONENT	1	(RTL)<R>
		VIDEO C SUB		FOR VEP08166C
				FOR VEP08166D
E9	VEP06903C	P.C.BOARD W/COMPONENT	1	(RTL)<R>
		INTERFACE		
E10	VEP06913A	P.C.BOARD W/COMPONENT	1	(RTL)<R>
		TIME CODE		AG-DS850HP
E10	VEP06913B	P.C.BOARD W/COMPONENT	1	(RTL)<R>
		TIME CODE		AG-DS840HP
E1	VEP01559A	P.C.BOARD W/COMPONENT	1	(RTL)<R>
		POWER (1)		
E2	VEP01560A	P.C.BOARD W/COMPONENT	1	(RTL)<R>
		POWER (2)		
E21	VEP04328A	P.C.BOARD W/COMPONENT	1	(RTL)<R>
		AUDIO METER		AG-DS850HP ONLY
E19	VEP04418A	P.C.BOARD W/COMPONENT	1	(RTL)<R>
		FRONT JACK		AG-DS850HP
E19	VEP04418B	P.C.BOARD W/COMPONENT	1	(RTL)<R>
		FRONT JACK		AG-DS840HP
E4	VEP00T59A	P.C.BOARD W/COMPONENT	1	(RTL)<R>
		MOTHER		AG-DS850HP
E4	VEP00T59B	P.C.BOARD W/COMPONENT	1	(RTL)<R>
		MOTHER		AG-DS840HP
E32	VEP01478C	P.C.BOARD W/COMPONENT	1	(RTL)<R>
		POWER CONNECT		
E14	VEP02417B	P.C.BOARD W/COMPONENT	1	(RTL)<R>
		REEL DRIVE		
E5	VEP03A66C	P.C.BOARD W/COMPONENT	1	(RTL)<R>
		VIDEO I/O		AG-DS850HP
E5	VEP03A66D	P.C.BOARD W/COMPONENT	1	(RTL)<R>
		VIDEO I/O		AG-DS840HP
	VEP00V57A	P.C.BOARD W/COMPONENT	1	(RTL)<R>
		VIDEO I/O SUB		FOR VEP03A66C
	VEP00V57B	P.C.BOARD W/COMPONENT	1	(RTL)<R>
		VIDEO I/O SUB		FOR VEP03A66D
E20	VEP04419A	P.C.BOARD W/COMPONENT	1	(RTL)<R>
		MIC JACK		AG-DS850HP ONLY
E7	VEP04420A	P.C.BOARD W/COMPONENT	1	(RTL)<R>
		AUDIO (1)		AG-DS850HP
E7	VEP04420B	P.C.BOARD W/COMPONENT	1	(RTL)<R>
		AUDIO (1)		AG-DS840HP
E8	VEP04421A	P.C.BOARD W/COMPONENT	1	(RTL)<R>
		AUDIO (2)		AG-DS850HP
E8	VEP04421B	P.C.BOARD W/COMPONENT	1	(RTL)<R>
		AUDIO (2)		AG-DS840HP
E15	VEP05162H	P.C.BOARD W/COMPONENT	1	(RTL)<R>
		HEAD AMP		AG-DS850HP
E15	VEP05162J	P.C.BOARD W/COMPONENT	1	(RTL)<R>
		HEAD AMP		AG-DS840HP
E16	VEP06902B	P.C.BOARD W/COMPONENT	1	(RTL)<R>
		FRONT		AG-DS850HP
E16	VEP06902D	P.C.BOARD W/COMPONENT	1	(RTL)<R>
		FRONT		AG-DS840HP
	VEP06929A	P.C.BOARD W/COMPONENT	1	(RTL)<R>
		FRONT LED		FOR VEP06902B
	VEP06929B	P.C.BOARD W/COMPONENT	1	(RTL)<R>
		FRONT LED		FOR VEP06902D
	VEP06962A	P.C.BOARD W/COMPONENT	1	(RTL)<R>
		KEY BOARD		FOR VEP06902B
	VEP06962B	P.C.BOARD W/COMPONENT	1	(RTL)<R>
		KEY BOARD		FOR VEP06902D
E3	VEP06904A	P.C.BOARD W/COMPONENT	1	(RTL)<R>
		SERVO & SYSTEM CONTROL		AG-DS850HP
E3	VEP06904B	P.C.BOARD W/COMPONENT	1	(RTL)<R>
		SERVO & SYSTEM CONTROL		AG-DS840HP
E11	VEP08159A	P.C.BOARD W/COMPONENT	1	(RTL)<R>
		TBC (1)		
	VEP00X66A	P.C.BOARD W/COMPONENT	1	(RTL)<R>
		TBC (1) SUB		FOR VEP08159A
E12	VEP08160A	P.C.BOARD W/COMPONENT	1	(RTL)<R>
		TBC (2)		
E30	VEP04424A	P.C.BOARD W/COMPONENT	1	(RTL)<R>
		XLR M		
E31	VEP04425A	P.C.BOARD W/COMPONENT	1	(RTL)<R>
		XLR F		
E33	VEP06906A	P.C.BOARD W/COMPONENT	1	(RTL)<R>
		9P IN CONNECT		
E28	VEP06908A	P.C.BOARD W/COMPONENT	1	(RTL)<R>
		REAR AMP		
E29	VEP06909A	P.C.BOARD W/COMPONENT	1	(RTL)<R>
		REAR JACK		

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
	VEP03A67C	P.C.BOARD W/COMPONENT		
		VIDEO DIGITAL		
	VEP03B61A	P.C.BOARD W/COMPONENT		FOR VEP03A67C
		DIGITAL SUB		
C3601	ECEV0JV470	E.CAPACITOR 6.3V 47U	1	
C3621	ECUM1E104ZFN	C.CAPACITOR CH 25V 0.1U	1	
C3659	ECUM1H101JCN	C.CAPACITOR CH 50V 100P	1	
C3678	ECEA1CKA100	E.CAPACITOR 16V 10U	1	
C3697	ECUM1H103KBN	C.CAPACITOR CH 50V 0.01U	1	
C3714	ECUM1H150JCN	C.CAPACITOR CH 50V 15P	1	
C3715	ECUM1H103KBN	C.CAPACITOR CH 50V 0.01U	1	
C3717	ECUM1H103KBN	C.CAPACITOR CH 50V 0.01U	1	
C3771	ECEV1CV100	E.CAPACITOR 16V 10U	1	
C3772,73	ECUM1H103KBN	C.CAPACITOR CH 50V 0.01U	2	
C3775	ECUM1H101JCN	C.CAPACITOR CH 50V 100P	1	
C3776	ECUM1H150JCN	C.CAPACITOR CH 50V 15P	1	
C3777	ECUM1H120JCN	C.CAPACITOR CH 50V 12P	1	
C3778	ECUM1H470JCN	C.CAPACITOR CH 50V 47P	1	
C3779,80	ECUM1H103KBN	C.CAPACITOR CH 50V 0.01U	2	
C3781	ECEV0JV470	E.CAPACITOR 6.3V 47U	1	
C3782	ECEV1CV100	E.CAPACITOR 16V 10U	1	
C3783-85	ECUM1H103KBN	C.CAPACITOR CH 50V 0.01U	3	
C3786	ECUM1H560JCN	C.CAPACITOR CH 50V 56P	1	
C3787	ECUM1E104ZFN	C.CAPACITOR CH 25V 0.1U	1	
C3793	ECUM1H103KBN	C.CAPACITOR CH 50V 0.01U	1	
C3801,02	ECUM1E104ZFN	C.CAPACITOR CH 25V 0.1U	2	
C3803	ECUM1H103KBN	C.CAPACITOR CH 50V 0.01U	1	
C3805,06	ECUM1H103KBN	C.CAPACITOR CH 50V 0.01U	2	
C3807	ECEV0JV470	E.CAPACITOR 6.3V 47U	1	
C3808	ECUM1H103KBN	C.CAPACITOR CH 50V 0.01U	1	
C3809	ECEV1HV3R3	E.CAPACITOR 50V 3.3U	1	
C3811	ECUM1E104ZFN	C.CAPACITOR CH 25V 0.1U	1	
C3812	ECEV1HV3R3	E.CAPACITOR 50V 3.3U	1	
C3813	ECUM1H103KBN	C.CAPACITOR CH 50V 0.01U	1	
C3814	ECEV0JV470	E.CAPACITOR 6.3V 47U	1	
C3815	ECUM1H103KBN	C.CAPACITOR CH 50V 0.01U	1	
C3816	ECUM1H120JCN	C.CAPACITOR CH 50V 12P	1	
C3817	ECUM1H103KBN	C.CAPACITOR CH 50V 0.01U	1	
C3819	ECUM1E104ZFN	C.CAPACITOR CH 25V 0.1U	1	
C3820	ECEV1HV3R3	E.CAPACITOR 50V 3.3U	1	
C3821	ECUM1H103KBN	C.CAPACITOR CH 50V 0.01U	1	
C3822	ECEV0JV470	E.CAPACITOR 6.3V 47U	1	
C3823	ECUM1H103KBN	C.CAPACITOR CH 50V 0.01U	1	
C3824	ECUM1H120JCN	C.CAPACITOR CH 50V 12P	1	
C3825	ECUM1H103KBN	C.CAPACITOR CH 50V 0.01U	1	
C3826	ECEV0JV220	E.CAPACITOR 6.3V 22U	1	
C3827,28	ECUM1E104ZFN	C.CAPACITOR CH 25V 0.1U	2	
C3829,30	ECEV0JV220	E.CAPACITOR 6.3V 22U	2	
C3831	ECUM1E104ZFN	C.CAPACITOR CH 25V 0.1U	1	
C3832	ECEV0JV220	E.CAPACITOR 6.3V 22U	1	
C3833	ECUM1H103KBN	C.CAPACITOR CH 50V 0.01U	1	
C3834	ECEV0JV470	E.CAPACITOR 6.3V 47U	1	
C3835	ECUM1H103KBN	C.CAPACITOR CH 50V 0.01U	1	
C3836	ECUM1H220JCN	C.CAPACITOR CH 50V 22P	1	
C3837	ECUM1H682KBN	C.CAPACITOR CH 50V 6800P	1	
C3838	ECUM1H050CCN	C.CAPACITOR CH 50V 5P	1	
C3839	ECUM1H103KBN	C.CAPACITOR CH 50V 0.01U	1	
C3840	ECEV0JV470	E.CAPACITOR 6.3V 47U	1	
C3841	ECUM1H020CCN	C.CAPACITOR CH 50V 2P	1	
C3842	ECUM1H222KBN	C.CAPACITOR CH 50V 2200P	1	
C3843-48	ECUM1H103KBN	C.CAPACITOR CH 50V 0.01U	6	
C3849	ECEV0JV470	E.CAPACITOR 6.3V 47U	1	
C3850	ECUM1H103KBN	C.CAPACITOR CH 50V 0.01U	1	
C3851	ECUM1H270JCN	C.CAPACITOR CH 50V 27P	1	
C3852	ECUM1H680JCN	C.CAPACITOR CH 50V 68P	1	
C3854	ECUM1H101JCN	C.CAPACITOR CH 50V 100P	1	
C3855	ECUM1H270JCN	C.CAPACITOR CH 50V 27P	1	
C3856	ECUM1H680JCN	C.CAPACITOR CH 50V 68P	1	
C3858	ECUM1H101JCN	C.CAPACITOR CH 50V 100P	1	
C3860	ECUM1H103KBN	C.CAPACITOR CH 50V 0.01U	1	
C3861	ECEV0JV470	E.CAPACITOR 6.3V 47U	1	

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
C3862	ECUM1E104ZFN	C.CAPACITOR CH 25V 0.1U	1	
C3863	ECEV0JV220	E.CAPACITOR 6.3V 22U	1	
C3864	ECUM1H103KBN	C.CAPACITOR CH 50V 0.01U	1	
C3865	ECEV0JV470	E.CAPACITOR 6.3V 47U	1	
C3866	ECUM1H103KBN	C.CAPACITOR CH 50V 0.01U	1	
C3867	ECEV1HV010	E.CAPACITOR 50V 1U	1	
C3868	ECUM1H103KBN	C.CAPACITOR CH 50V 0.01U	1	
C3869	ECUM1E104ZFN	C.CAPACITOR CH 25V 0.1U	1	
C3870,71	ECEV0JV220	E.CAPACITOR 6.3V 22U	2	
C3872,73	ECUM1E104ZFN	C.CAPACITOR CH 25V 0.1U	2	
C3874	ECEV0JV220	E.CAPACITOR 6.3V 22U	1	
C3875	ECUM1E104ZFN	C.CAPACITOR CH 25V 0.1U	1	
C3876,77	ECEV0JV220	E.CAPACITOR 6.3V 22U	2	
C3878	ECUM1E104ZFN	C.CAPACITOR CH 25V 0.1U	1	
C3879	ECEV0JV220	E.CAPACITOR 6.3V 22U	1	
C3880	ECUM1E104ZFN	C.CAPACITOR CH 25V 0.1U	1	
C3881	ECUM1H100DCN	C.CAPACITOR CH 50V 10P	1	
C3883	ECKF1H103ZF	C.CAPACITOR 50V 0.01U	1	
C3884	ECUM1E104ZFN	C.CAPACITOR CH 25V 0.1U	1	
C3885-87	ECUM1H103KBN	C.CAPACITOR CH 50V 0.01U	3	
C3889,90	ECUM1H103KBN	C.CAPACITOR CH 50V 0.01U	2	
C3891	ECEV0JV220	E.CAPACITOR 6.3V 22U	1	
C3892	ECUM1E104ZFN	C.CAPACITOR CH 25V 0.1U	1	
C3893	ECUM1H103KBN	C.CAPACITOR CH 50V 0.01U	1	
C3894	ECUM1E104ZFN	C.CAPACITOR CH 25V 0.1U	1	
C3897	ECCF1H330JC	C.CAPACITOR 50V 33P	1	
C3898,99	ECUM1H103KBN	C.CAPACITOR CH 50V 0.01U	2	
C3901	ECUM1H103KBN	C.CAPACITOR CH 50V 0.01U	1	
C3902	ECEV0JV470	E.CAPACITOR 6.3V 47U	1	
C3903	ECEV1EV4R7	E.CAPACITOR 25V 4.7U	1	
C3921-24	ECUM1H103KBN	C.CAPACITOR CH 50V 0.01U	4	
C3951	ECUM1H103KBN	C.CAPACITOR CH 50V 0.01U	1	
C3952	ECEV0JV470	E.CAPACITOR 6.3V 47U	1	
C3953	ECUM1H103KBN	C.CAPACITOR CH 50V 0.01U	1	
C3954	ECUM1E104ZFN	C.CAPACITOR CH 25V 0.1U	1	
C3955	ECEV0JV220	E.CAPACITOR 6.3V 22U	1	
C3956	ECEV1HV010	E.CAPACITOR 50V 1U	1	
C3957,58	ECUM1H103KBN	C.CAPACITOR CH 50V 0.01U	2	
C3959	ECEV0JV470	E.CAPACITOR 6.3V 47U	1	
C3961-72	ECUM1H103KBN	C.CAPACITOR CH 50V 0.01U	12	
C3982	ECUM1H103KBN	C.CAPACITOR CH 50V 0.01U	1	
C3984	ECUM1H103KBN	C.CAPACITOR CH 50V 0.01U	1	
C3986	ECUM1H103KBN	C.CAPACITOR CH 50V 0.01U	1	
C3987	ECEV0JV470	E.CAPACITOR 6.3V 47U	1	
C3988	ECUM1H103KBN	C.CAPACITOR CH 50V 0.01U	1	
D3601	MA151K	DIODE	1	◁R▷
D3602	MA165VT	DIODE	1	◁R▷
D3801	MA729	DIODE	1	◁R▷
D3811-14	MA704	DIODE	4	◁R▷
D3902	MA151K	DIODE	1	◁R▷
D3961	31DQ04	DIODE	1	◁R▷
FL3601	VLF1016A223	FILTER	1	
FL3822,23	VLF1016A223	FILTER	2	
FL3961-64	VLF1016A470	FILTER	4	
FL3965-69	VLF1016A101	FILTER	5	
FL3970,71	VLF1016A470	FILTER	2	
FL3975	VLF1016A470	FILTER	1	
FL3976	VLF1016A101	FILTER	1	
FL3978-80	VLF1016A101	FILTER	3	
FL3981	VLF1016A470	FILTER	1	
FL3982,83	VLF1016A101	FILTER	2	
IC3602	TC74HC123AF	IC	1	◁R▷
IC3702	MC74HC86F	IC	1	◁R▷
IC3703	MC74HC74AF	IC	1	◁R▷
IC3704	MC74HC00AF	IC	1	◁R▷
IC3771	MC14053BF	IC	1	◁R▷

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
IC3781	AN6336S	IC	1	<R>
IC3782	MC74HC74AF	IC	1	<R>
IC3783	MC14517BCP	IC	1	<R>
IC3801	MN6711A1	IC	1	<R>
IC3802	MN6712	IC	1	<R>
IC3803	MN67101A	IC	1	<R>
IC3804	MN67102A	IC	1	<R>
IC3805	MN67103	IC	1	<R>
IC3806,07	MB40558PF	IC	2	<R>
IC3808	MN6570F	IC	1	<R>
IC3810	MC4044M	IC	1	<R>
IC3811	MC74HC04AF	IC	1	<R>
IC3812	AN3915S	IC	1	<R>
IC3813	TC7W04F	IC	1	<R>
IC3814	MN13821-S	IC	1	<R>
IC3815	UPD65025G122	IC	1	<R>
IC3816	TC7W04F	IC	1	<R>
IC3817	SN74LS221NS	IC	1	<R>
IC3818	MC74HC00AF	IC	1	<R>
IC3820	TC7S08F	IC	1	<R>
IC3901	MN170804VMFC	IC	1	<R>
IC3902	MN13821-S	IC	1	<R>
IC3903	TC7W00F	IC	1	<R>
IC3921	MC74HC157AF	IC	1	<R>
IC3922	MC74HC163AF	IC	1	<R>
IC3923	MC74HC32AF	IC	1	<R>
IC3924	HM63021FP	IC	1	<R>
IC3925	TC7S04F	IC	1	<R>
IC3951	MN6570F	IC	1	<R>
L3601	VLQ0319K101	COIL 100UH	1	
L3771,72	VLQ0319K101	COIL 100UH	2	
L3773	VLQ0133J471	COIL 470UH	1	
L3779	VLQ0163J390	COIL 39UH	1	
L3801-03	VLP0133	COIL	3	
L3804-06	VLQ0319K100	COIL 10UH	3	
L3808	VLQ0319K100	COIL 10UH	1	
L3810	VLQ0319K330	COIL 39UH	1	
L3811	VLQ0163J6R8	COIL 6.8UH	1	
L3812,13	VLQ0319K330	COIL 39UH	2	
L3814	VLQ0163J270	COIL 27UH	1	
L3815,16	VLQ0163J680	COIL 68UH	2	
L3817	VLQ0163J270	COIL 27UH	1	
L3818,19	VLQ0319K100	COIL 10UH	2	
L3821	VLQ0319K100	COIL 10UH	1	
L3823-25	VLQ0319K100	COIL 10UH	3	
L3901	VLQ0319K101	COIL 100UH	1	
L3951,52	VLQ0319K100	COIL 10UH	2	
P3932	VJP3176B064	CONNECTOR (MALE) 64P	1	
P3961,62	VJS2848D018	CONNECTOR (FEMALE) 18P	2	
P3963	VJP1233T	CONNECTOR (MALE) 6P	1	
Q3771-73	MSD601-R	TRANSISTOR	3	<R>
Q3774	MSB709-R	TRANSISTOR	1	<R>
Q3783	2SD1328	TRANSISTOR	1	<R>
Q3784	MSD601-R	TRANSISTOR	1	<R>
Q3801	2SD1030	TRANSISTOR	1	<R>
Q3802	MSC2295-B	TRANSISTOR	1	<R>
Q3803	MSD601-R	TRANSISTOR	1	<R>
Q3804	MSC2295-B	TRANSISTOR	1	<R>
Q3805-08	MSD601-R	TRANSISTOR	4	<R>
Q3809	MSC2295-B	TRANSISTOR	1	<R>
Q3951,52	MSD601-R	TRANSISTOR	2	<R>
QR3772	MRN1404	TRANSISTOR	1	<R>
QR3810	MRN1404	TRANSISTOR	1	<R>

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
R3643	ERJ6GEYJ101	M.RESISTOR CH 1/10W 100	1	
R3661	ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	1	
R3673	ERJ6GEYJ154	M.RESISTOR CH 1/10W 150K	1	
R3674	ERDS2TJ472	C.RESISTOR 1/4W 4.7K	1	
R3691	ERJ6GEYJ562	M.RESISTOR CH 1/10W 5.6K	1	
R3692	ERJ6GEY0R00	M.RESISTOR CH 1/10W 0	1	
R3710	ERJ6GEYJ105	M.RESISTOR CH 1/10W 1M	1	
R3713	ERJ6GEY0R00	M.RESISTOR CH 1/10W 0	1	
R3714	ERJ6GEYJ473	M.RESISTOR CH 1/10W 47K	1	
R3717	ERJ6GEYG333	M.RESISTOR CH 1/10W 33K	1	
R3720	ERJ6GEYG472	M.RESISTOR CH 1/10W 4.7K	1	
R3771	ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	1	
R3772	ERJ6GEYJ223	M.RESISTOR CH 1/10W 22K	1	
R3773	ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	1	
R3774	ERJ6GEYJ152	M.RESISTOR CH 1/10W 1.5K	1	
R3775	ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	1	
R3776	ERJ6GEYJ102	M.RESISTOR CH 1/10W 1K	1	
R3777	ERJ6GEYJ222	M.RESISTOR CH 1/10W 2.2K	1	
R3778	ERJ6GEYJ223	M.RESISTOR CH 1/10W 22K	1	
R3779,80	ERJ6GEYJ102	M.RESISTOR CH 1/10W 1K	2	
R3781	ERJ6GEYJ473	M.RESISTOR CH 1/10W 47K	1	
R3782	ERJ6GEYJ152	M.RESISTOR CH 1/10W 1.5K	1	
R3784	ERJ6GEYJ222	M.RESISTOR CH 1/10W 2.2K	1	
R3786	ERJ6GEYJ221	M.RESISTOR CH 1/10W 220	1	
R3788	ERJ6GEYJ152	M.RESISTOR CH 1/10W 1.5K	1	
R3789	ERJ6GEYJ223	M.RESISTOR CH 1/10W 22K	1	
R3790	ERJ6GEYJ561	M.RESISTOR CH 1/10W 560	1	
R3791	ERJ6GEYG472	M.RESISTOR CH 1/10W 4.7K	1	
R3792	ERJ6GEYJ102	M.RESISTOR CH 1/10W 1K	1	
R3793,94	ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	2	
R3795	ERJ6GEYJ473	M.RESISTOR CH 1/10W 47K	1	
R3801,02	ERJ6GEYJ105	M.RESISTOR CH 1/10W 1M	2	
R3803	ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	1	
R3804	ERJ6GEYJ105	M.RESISTOR CH 1/10W 1M	1	
R3805	ERJ6GEY0R00	M.RESISTOR CH 1/10W 0	1	
R3806	ERJ6GEYJ105	M.RESISTOR CH 1/10W 1M	1	
R3808	ERJ6GEY0R00	M.RESISTOR CH 1/10W 0	1	
R3809	ERJ6GEYJ101	M.RESISTOR CH 1/10W 100	1	
R3810	ERJ6GEYJ222	M.RESISTOR CH 1/10W 2.2K	1	
R3811,12	ERJ6GEYJ102	M.RESISTOR CH 1/10W 1K	2	
R3813	ERJ6GEY0R00	M.RESISTOR CH 1/10W 0	1	
R3815-17	ERJ6GEYJ105	M.RESISTOR CH 1/10W 1M	3	
R3818	ERJ6GEYJ222	M.RESISTOR CH 1/10W 2.2K	1	
R3820	VRE0034E103	M.RESISTOR CH 1/10W 10K	1	
R3821	ERJ6GEYG472	M.RESISTOR CH 1/10W 4.7K	1	
R3822	ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	1	
R3823	ERJ6GEYJ683	M.RESISTOR CH 1/10W 68K	1	
R3824-26	ERJ6GEY0R00	M.RESISTOR CH 1/10W 0	3	
R3829	ERJ6GEYJ222	M.RESISTOR CH 1/10W 2.2K	1	
R3830	VRE0034E562	M.RESISTOR CH 1/10W 5.6K	1	
R3831	ERJ6GEY0R00	M.RESISTOR CH 1/10W 0	1	
R3832	VRE0034E562	M.RESISTOR CH 1/10W 5.6K	1	
R3835	ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	1	
R3836	ERJ6GEYJ102	M.RESISTOR CH 1/10W 1K	1	
R3837	ERJ6GEYJ154	M.RESISTOR CH 1/10W 150K	1	
R3838	ERJ6GEYG333	M.RESISTOR CH 1/10W 33K	1	
R3839	ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	1	
R3840,41	ERJ6GEYJ223	M.RESISTOR CH 1/10W 22K	2	
R3842	ERJ6GEYJ122	M.RESISTOR CH 1/10W 1.2K	1	
R3843	ERJ6GEYJ391	M.RESISTOR CH 1/10W 390	1	
R3844	ERJ6GEYJ222	M.RESISTOR CH 1/10W 2.2K	1	
R3845	ERJ6GEYG333	M.RESISTOR CH 1/10W 33K	1	
R3846	ERJ6GEYJ183	M.RESISTOR CH 1/10W 18K	1	
R3847	ERJ6GEYJ102	M.RESISTOR CH 1/10W 1K	1	
R3848	ERJ6GEYJ561	M.RESISTOR CH 1/10W 560	1	
R3849	ERJ6GEYJ101	M.RESISTOR CH 1/10W 100	1	
R3850	ERJ6GEYJ222	M.RESISTOR CH 1/10W 2.2K	1	
R3851,52	ERJ6GEYJ223	M.RESISTOR CH 1/10W 22K	2	
R3853	ERJ6GEYG333	M.RESISTOR CH 1/10W 33K	1	
R3854	ERJ6GEYG153	M.RESISTOR CH 1/10W 15K	1	
R3855	ERJ6GEYJ122	M.RESISTOR CH 1/10W 1.2K	1	
R3856	ERJ6GEYJ471	M.RESISTOR CH 1/10W 470	1	

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
R3857	ERJ6GEYJ222	M.RESISTOR CH 1/10W 2.2K	1	
R3858,59	ERJ6GEYJ223	M.RESISTOR CH 1/10W 22K	2	
R3860,61	ERJ6GEYJ102	M.RESISTOR CH 1/10W 1K	2	
R3862	ERJ6GEY0R00	M.RESISTOR CH 1/10W 0	1	
R3865	ERJ6GEYJ562	M.RESISTOR CH 1/10W 5.6K	1	
R3866	ERJ6GEYJ561	M.RESISTOR CH 1/10W 560	1	
R3867	ERJ6GEYJ682	M.RESISTOR CH 1/10W 6.8K	1	
R3868	VRE0034E271	M.RESISTOR CH 1/10W 270	1	
R3869	ERJ6GEY0R00	M.RESISTOR CH 1/10W 0	1	
R3870	ERJ6GEYJ101	M.RESISTOR CH 1/10W 100	1	
R3871	ERJ6GEYJ222	M.RESISTOR CH 1/10W 2.2K	1	
R3872	ERJ6GEYJ121	M.RESISTOR CH 1/10W 120	1	
R3873	ERJ6GEYJ331	M.RESISTOR CH 1/10W 330	1	
R3874-80	ERJ6GEYJ102	M.RESISTOR CH 1/10W 1K	7	
R3881-87	ERJ6GEYJ222	M.RESISTOR CH 1/10W 2.2K	7	
R3888	ERJ6GEYJ151	M.RESISTOR CH 1/10W 150	1	
R3890	ERJ6GEY0R00	M.RESISTOR CH 1/10W 0	1	
R3893	ERJ6GEYJ223	M.RESISTOR CH 1/10W 22K	1	
R3894	ERJ6GEYG333	M.RESISTOR CH 1/10W 33K	1	
R3897	ERDS2TJ271	C.RESISTOR 1/4W 270	1	
R3898	ERJ6GEYG333	M.RESISTOR CH 1/10W 33K	1	
R3899	ERJ6GEYJ393	M.RESISTOR CH 1/10W 39K	1	
R3901	ERJ6GEYJ473	M.RESISTOR CH 1/10W 47K	1	
R3902-05	ERJ6GEYJ332	M.RESISTOR CH 1/10W 3.3K	4	
R3906	ERJ3GEY0R00	M.RESISTOR CH 1/16W 0	1	
R3911	ERJ6GEYJ105	M.RESISTOR CH 1/10W 1M	1	
R3912	ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	1	
R3913-15	ERJ6GEYJ105	M.RESISTOR CH 1/10W 1M	3	
R3916	ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	1	
R3918,19	ERJ6GEYJ105	M.RESISTOR CH 1/10W 1M	2	
R3921-24	ERJ6GEYJ473	M.RESISTOR CH 1/10W 47K	4	
R3925-28	ERJ6GEY0R00	M.RESISTOR CH 1/10W 0	4	
R3933	ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	1	
R3935	ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	1	
R3937-39	ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	3	
R3942	ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	1	
R3944	ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	1	
R3948	ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	1	
R3951	VRE0034E201	M.RESISTOR CH 1/10W 200	1	
R3952	VRE0034E101	M.RESISTOR CH 1/10W 100	1	
R3953,54	ERJ6GEYJ222	M.RESISTOR CH 1/10W 2.2K	2	
R3955	ERJ6GEYJ682	M.RESISTOR CH 1/10W 6.8K	1	
R3956	ERJ6GEYJ561	M.RESISTOR CH 1/10W 560	1	
R3957	ERJ6GEYJ562	M.RESISTOR CH 1/10W 5.6K	1	
R3958	ERJ6GEY0R00	M.RESISTOR CH 1/10W 0	1	
R3961-67	ERJ6GEY0R00	M.RESISTOR CH 1/10W 0	7	
R3968	ERJ6GEYJ820	M.RESISTOR CH 1/10W 82	1	
R3969-73	ERJ6GEYJ101	M.RESISTOR CH 1/10W 100	5	
R3974,75	ERJ6GEY0R00	M.RESISTOR CH 1/10W 0	2	
R3976-78	ERJ6GEYJ101	M.RESISTOR CH 1/10W 100	3	
R3979	ERJ6GEYJ820	M.RESISTOR CH 1/10W 82	1	
R3980	ERJ6GEY0R00	M.RESISTOR CH 1/10W 0	1	
R3981-87	ERJ6GEYJ101	M.RESISTOR CH 1/10W 100	7	
R3988	ERJ6GEYJ222	M.RESISTOR CH 1/10W 2.2K	1	
R3989	ERJ6GEYJ101	M.RESISTOR CH 1/10W 100	1	
R3991	ERJ6GEY0R00	M.RESISTOR CH 1/10W 0	1	
R3993	ERJ6GEYJ101	M.RESISTOR CH 1/10W 100	1	
SW3921	VSR0045	SWITCH	1	<R>
VR3771	VRV0161B202	V.RESISTOR 2K	1	
X3801	VSX0353	CRYSTAL OSCILLATOR	1	<R>
X3901	VSX0176	CRYSTAL OSCILLATOR	1	<R>
		MISCELLANEOUS		
E48	VMZ2228	INSULATER	1	
E49	VSC3973	SHIELD PLATE	1	
E50	XTV3+6FFR	SCREW	2	

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
	VEP08166C	P.C.BOARD W/COMPONENT		AG-DS850HP
		VIDEO C		
	VEP08166D	P.C.BOARD W/COMPONENT		AG-DS840HP
		VIDEO C		
	VEP00X85A	P.C.BOARD W/COMPONENT		FOR VEP08166C
		VIDEO C SUB		FOR VEP08166D
C9001	ECUM1H103ZFN	C.CAPACITOR 50V 0.01U	1	
C9002	ECEA0JKA470	E.CAPACITOR 6.3V 47U	1	
C9003	ECUM1H103ZFN	C.CAPACITOR 50V 0.01U	1	AG-DS850HP
C9004	ECEA0JKA470	E.CAPACITOR 6.3V 47U	1	AG-DS850HP
C9005	ECUM1H103ZFN	C.CAPACITOR 50V 0.01U	1	
C9006	ECEA0JKA470	E.CAPACITOR 6.3V 47U	1	
C9101,02	ECUM1E104ZFN	C.CAPACITOR CH 25V 0.1U	2	AG-DS850HP
C9103,04	ECUM1H103ZFN	C.CAPACITOR 50V 0.01U	2	AG-DS850HP
C9105	ECEA1CKA100	E.CAPACITOR 16V 10U	1	AG-DS850HP
C9106	ECEA1CKA470	E.CAPACITOR 16V 47U	1	AG-DS850HP
C9107	ECEA1HKA010	E.CAPACITOR 50V 1U	1	AG-DS850HP
C9111-18	ECUM1E104ZFN	C.CAPACITOR CH 25V 0.1U	8	AG-DS850HP
C9126	ECUM1H103ZFN	C.CAPACITOR 50V 0.01U	1	AG-DS850HP
C9127-29	ECUM1E104ZFN	C.CAPACITOR CH 25V 0.1U	3	AG-DS850HP
C9200	ECUM1H103ZFN	C.CAPACITOR 50V 0.01U	1	AG-DS850HP
C9201	ECEA0JKA470	E.CAPACITOR 6.3V 47U	1	AG-DS850HP
C9202	ECUM1H470JCN	C.CAPACITOR CH 50V 47P	1	AG-DS850HP
C9203	ECUM1H121JCN	C.CAPACITOR CH 50V 120P	1	AG-DS850HP
C9204	ECUM1H103ZFN	C.CAPACITOR 50V 0.01U	1	AG-DS850HP
C9205	ECEA0JKA470	E.CAPACITOR 6.3V 47U	1	AG-DS850HP
C9206	ECUM1H103ZFN	C.CAPACITOR 50V 0.01U	1	AG-DS850HP
C9207	ECUM1H220JCN	C.CAPACITOR CH 50V 22P	1	AG-DS850HP
C9208	ECEA1CKA100	E.CAPACITOR 16V 10U	1	AG-DS850HP
C9209	ECSF1CE106	T.CAPACITOR 16V 10U	1	AG-DS850HP
C9210	ECEA1CKA100	E.CAPACITOR 16V 10U	1	AG-DS850HP
C9211	ECUM1H103ZFN	C.CAPACITOR 50V 0.01U	1	AG-DS850HP
C9212	ECUM1E104ZFN	C.CAPACITOR CH 25V 0.1U	1	AG-DS850HP
C9213	ECUM1H103ZFN	C.CAPACITOR 50V 0.01U	1	AG-DS850HP
C9214	ECEA0JKA101	E.CAPACITOR 6.3V 100U	1	AG-DS850HP
C9215	ECEA1CKA100	E.CAPACITOR 16V 10U	1	AG-DS850HP
C9216	ECUM1E104ZFN	C.CAPACITOR CH 25V 0.1U	1	AG-DS850HP
C9217,18	ECUM1H103ZFN	C.CAPACITOR 50V 0.01U	2	AG-DS850HP
C9219	ECEA0JKA470	E.CAPACITOR 6.3V 47U	1	AG-DS850HP
C9220	ECUM1E104ZFN	C.CAPACITOR CH 25V 0.1U	1	AG-DS850HP
C9221	ECEA1HKA0R1	E.CAPACITOR 50V 0.1U	1	AG-DS850HP
C9222	ECUM1E104ZFN	C.CAPACITOR CH 25V 0.1U	1	AG-DS850HP
C9223	ECEA1EKA4R7	E.CAPACITOR 25V 4.7U	1	AG-DS850HP
C9224	ECUM1H223KBN	C.CAPACITOR CH 50V 0.022U	1	AG-DS850HP
C9225	ECEA0JKA470	E.CAPACITOR 6.3V 47U	1	AG-DS850HP
C9226	ECUM1E104ZFN	C.CAPACITOR CH 25V 0.1U	1	AG-DS850HP
C9227	ECUM1H680JCN	C.CAPACITOR CH 50V 68P	1	AG-DS850HP
C9228	ECUM1E104ZFN	C.CAPACITOR CH 25V 0.1U	1	AG-DS850HP
C9229	ECUM1H180JCN	C.CAPACITOR CH 50V 18P	1	AG-DS850HP
C9230	ECUM1E104ZFN	C.CAPACITOR CH 25V 0.1U	1	AG-DS850HP
C9231	ECUM1H103ZFN	C.CAPACITOR 50V 0.01U	1	AG-DS850HP
C9232	ECUM1E104ZFN	C.CAPACITOR CH 25V 0.1U	1	AG-DS850HP
C9233	ECEA0JKA470	E.CAPACITOR 6.3V 47U	1	AG-DS850HP
C9234	ECUM1E104ZFN	C.CAPACITOR CH 25V 0.1U	1	AG-DS850HP
C9235	ECEA0JKA470	E.CAPACITOR 6.3V 47U	1	AG-DS850HP
C9236,37	ECUM1H103ZFN	C.CAPACITOR 50V 0.01U	2	AG-DS850HP
C9238	ECUM1H102JCN	C.CAPACITOR CH 50V 1000P	1	AG-DS850HP
C9239	ECEA1HKA010	E.CAPACITOR 50V 1U	1	AG-DS850HP
C9240	ECUM1H103ZFN	C.CAPACITOR 50V 0.01U	1	AG-DS850HP
C9241	ECEA1HKA010	E.CAPACITOR 50V 1U	1	AG-DS850HP
C9242	ECUM1H221JCN	C.CAPACITOR CH 50V 220P	1	AG-DS850HP
C9243	ECUM1H152KBN	C.CAPACITOR CH 50V 1500P	1	AG-DS850HP
C9244,45	ECUM1H103ZFN	C.CAPACITOR 50V 0.01U	2	AG-DS850HP
C9246	ECEA0JKA470	E.CAPACITOR 6.3V 47U	1	AG-DS850HP
C9247	ECEA1EKA4R7	E.CAPACITOR 25V 4.7U	1	AG-DS850HP
C9249	ECUM1H101JCN	C.CAPACITOR CH 50V 100P	1	AG-DS850HP
C9251	ECUM1H121JCN	C.CAPACITOR CH 50V 120P	1	AG-DS850HP
C9401	ECEA1CKA100	E.CAPACITOR 16V 10U	1	
C9402	ECUM1H103ZFN	C.CAPACITOR 50V 0.01U	1	
C9403	ECEA1CKA100	E.CAPACITOR 16V 10U	1	
C9404	ECUM1H270JUN	C.CAPACITOR CH 50V 27P	1	

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
C9406	ECUM1H150JCN	C.CAPACITOR CH 50V 15P	1	
C9407	ECUM1H120JCN	C.CAPACITOR CH 50V 12P	1	
C9408	ECUM1H470JCN	C.CAPACITOR CH 50V 47P	1	
C9409	ECUM1E104ZFN	C.CAPACITOR CH 25V 0.1U	1	
C9414	ECUM1H180JCN	C.CAPACITOR CH 50V 18P	1	
C9418	ECUM1H103ZFN	C.CAPACITOR 50V 0.01U	1	
C9422	ECEA0JKA470	E.CAPACITOR 6.3V 47U	1	
C9423	ECUM1H103ZFN	C.CAPACITOR 50V 0.01U	1	
C9424	ECEA0JKA470	E.CAPACITOR 6.3V 47U	1	
C9425	ECUM1H103ZFN	C.CAPACITOR 50V 0.01U	1	
C9426	ECUM1E104ZFN	C.CAPACITOR CH 25V 0.1U	1	
C9427,28	ECUM1H151JCN	C.CAPACITOR CH 50V 150P	2	
C9429	ECUM1E104ZFN	C.CAPACITOR CH 25V 0.1U	1	
C9430-33	ECUM1E473KBN	C.CAPACITOR CH 25V 0.047U	4	
C9434	ECUM1H103ZFN	C.CAPACITOR 50V 0.01U	1	
C9435	ECEA1HKAR47	E.CAPACITOR 50V 0.47U	1	
C9436	ECUM1H153KBN	C.CAPACITOR CH 50V 0.015U	1	
C9437	ECUM1H471JCN	C.CAPACITOR CH 50V 470P	1	
C9438	ECUM1H151JCN	C.CAPACITOR CH 50V 150P	1	
C9439-44	ECUM1H103ZFN	C.CAPACITOR 50V 0.01U	6	
C9445	ECEA0JKA101	E.CAPACITOR 6.3V 100U	1	
C9446,47	ECUM1H103ZFN	C.CAPACITOR 50V 0.01U	2	
C9448	ECEA0JKA470	E.CAPACITOR 6.3V 47U	1	
C9449,50	ECUM1H103ZFN	C.CAPACITOR 50V 0.01U	2	
C9451	ECUM1H273KBN	C.CAPACITOR CH 50V 0.027U	1	
C9453,54	ECEA1CKA100	E.CAPACITOR 16V 10U	2	
C9455	ECUM1H103ZFN	C.CAPACITOR 50V 0.01U	1	
C9456,57	ECEA1AKN100	E.CAPACITOR 10V 10U	2	
C9458	ECUM1E104ZFN	C.CAPACITOR CH 25V 0.1U	1	
C9459,60	ECEA0JKA470	E.CAPACITOR 6.3V 47U	2	
C9467	ECUM1E104ZFN	C.CAPACITOR CH 25V 0.1U	1	
C9468	ECUM1H103ZFN	C.CAPACITOR 50V 0.01U	1	
C9472	ECEA1CKA100	E.CAPACITOR 16V 10U	1	
C9473-77	ECUM1H103ZFN	C.CAPACITOR 50V 0.01U	5	
C9478,79	ECUM1E104ZFN	C.CAPACITOR CH 25V 0.1U	2	
C9481	ECUM1H222KBN	C.CAPACITOR CH 50V 2200P	1	
C9482	ECUM1H330JCN	C.CAPACITOR CH 50V 33P	1	
C9483	ECUM1H101JCN	C.CAPACITOR CH 50V 100P	1	
C9485	ECEA1CKA220	E.CAPACITOR 16V 22U	1	
C9486	ECEA0JKA470	E.CAPACITOR 6.3V 47U	1	
C9487	ECUM1E104ZFN	C.CAPACITOR CH 25V 0.1U	1	
C9488	ECUM1H103ZFN	C.CAPACITOR 50V 0.01U	1	
C9489,90	ECEA0JKA470	E.CAPACITOR 6.3V 47U	2	
C9491	ECUM1E104ZFN	C.CAPACITOR CH 25V 0.1U	1	
C9491	ECUM1H560JCN	C.CAPACITOR CH 50V 56P	1	
C9492	ECUM1H103ZFN	C.CAPACITOR 50V 0.01U	1	
D9001	11EQS04	DIODE	1	<R>AG-DS850HP
D9221	MA151K	DIODE	1	<R>AG-DS850HP
D9401	MA151WK	DIODE	1	<R>
D9493	MA151K	DIODE	1	<R>
DL9401	VLD0269	DELAY LINE	1	
FL9401	VLF0894	FILTER	1	
FL9402	VLF1046	FILTER	1	
IC9101,02	UPD42280G3	IC	2	<R>AG-DS850HP
IC9103	UPD6480GF	IC	1	<R>AG-DS850HP
IC9104	UPC664GS	IC	1	<R>AG-DS850HP
IC9105	UPD6481GC	IC	1	<R>AG-DS850HP
IC9201	UPC659G	IC	1	<R>AG-DS850HP
IC9202	UPC1860GS	IC	1	<R>AG-DS850HP
IC9204	TC7S08F	IC	1	<R>AG-DS850HP
IC9222	AN78N05	IC	1	<R>AG-DS850HP
IC9401	NJM2233BMA	IC	1	<R>
IC9403	M52350FP	IC	1	<R>

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
IC9404	NJM2283M	IC	1	<R>
IC9405	AN78N05	IC	1	<R>
IC9410	AN6366NS	IC	1	<R>
IC9421	UPC393G2	IC	1	<R>
L9001	VLP0133	COIL	1	AG-DS850HP
L9101,02	VLQ0460	COIL	2	AG-DS850HP
L9201	VLQEL05K100J	COIL	1	AG-DS850HP
L9202-05	VLQ0460	COIL	4	AG-DS850HP
L9401,02	VLQ0460	COIL	2	
L9404	VLQEL05K680J	COIL	1	
L9407,08	VLQ0460	COIL	2	
L9409	VLQEL05K390J	COIL	1	
L9414	VLQEL05K101J	COIL	1	
P9461,62	VJS2907D018	CONNECTOR (FEMALE) 18P	2	
P9463	VJP1246T	CONNECTOR (MALE) 6P	1	
Q9101-03	MSD601-R	TRANSISTOR	3	<R>AG-DS850HP
Q9201-05	MSD601-R	TRANSISTOR	5	<R>AG-DS850HP
Q9206	MSB709-R	TRANSISTOR	1	<R>AG-DS850HP
Q9401	MSC2295-B	TRANSISTOR	1	<R>
Q9402	MSB709-R	TRANSISTOR	1	<R>
Q9403	MSD601-R	TRANSISTOR	1	<R>AG-DS850HP
Q9404	MSB709-R	TRANSISTOR	1	<R>AG-DS850HP
Q9407,08	MSD601-R	TRANSISTOR	2	<R>
Q9410,11	MSD601-R	TRANSISTOR	2	<R>
Q9413	MSD601-R	TRANSISTOR	1	<R>
Q9415	MSB709-R	TRANSISTOR	1	<R>
Q9416	MSC2295-B	TRANSISTOR	1	<R>
Q9418	MSB709-R	TRANSISTOR	1	<R>
Q9419	MSC2295-B	TRANSISTOR	1	<R>
Q9420,21	MSB709-R	TRANSISTOR	2	<R>AG-DS850HP
Q9422	MSD601-R	TRANSISTOR	1	<R>AG-DS850HP
Q9423	MSC2295-B	TRANSISTOR	1	<R>
Q9423	MSD601-R	TRANSISTOR	1	<R>
Q9424	MSC2295-B	TRANSISTOR	1	<R>
Q9425	MSB709-R	TRANSISTOR	1	<R>
QR9402	MRN2404	TRANSISTOR	1	<R>
QR9403-05	MRN1404	TRANSISTOR	3	<R>
QR9406,07	MRN2404	TRANSISTOR	2	<R>
QR9408	MRN1404	TRANSISTOR	1	<R>
R9001	ERJ6GEY0R00	M.RESISTOR CH 1/10W 0	1	
R9101	ERJ6GEY0R00	M.RESISTOR CH 1/10W 0	1	AG-DS850HP
R9102,03	ERJ6GEYJ102	M.RESISTOR CH 1/10W 1K	2	AG-DS850HP
R9104	ERJ6GEYJ105	M.RESISTOR CH 1/10W 1M	1	AG-DS850HP
R9105,06	ERJ6GEYJ330	M.RESISTOR CH 1/10W 33	2	AG-DS850HP
R9107-09	ERJ6GEYJ223	M.RESISTOR CH 1/10W 22K	3	AG-DS850HP
R9110,11	ERJ6GEY0R00	M.RESISTOR CH 1/10W 0	2	AG-DS850HP
R9203	ERJ6GEYJ105	M.RESISTOR CH 1/10W 1M	1	AG-DS850HP
R9204	ERJ6GEYG472	M.RESISTOR CH 1/10W 4.7K	1	AG-DS850HP
R9205	ERJ6GEYJ183	M.RESISTOR CH 1/10W 18K	1	AG-DS850HP
R9206	ERJ6GEYJ101	M.RESISTOR CH 1/10W 100	1	AG-DS850HP
R9207	ERJ6GEYJ561	M.RESISTOR CH 1/10W 560	1	AG-DS850HP
R9208	ERJ6GEYJ151	M.RESISTOR CH 1/10W 150	1	AG-DS850HP
R9209	ERJ6GEYG472	M.RESISTOR CH 1/10W 4.7K	1	AG-DS850HP
R9210	ERJ6GEYJ681	M.RESISTOR CH 1/10W 680	1	AG-DS850HP
R9211	ERJ6GEYJ221	M.RESISTOR CH 1/10W 220	1	AG-DS850HP
R9212	ERJ6GEYJ473	M.RESISTOR CH 1/10W 47K	1	AG-DS850HP
R9213	ERJ6GEYJ221	M.RESISTOR CH 1/10W 220	1	AG-DS850HP
R9214	ERJ6GEYJ473	M.RESISTOR CH 1/10W 47K	1	AG-DS850HP
R9215	ERJ6GEYJ104	M.RESISTOR CH 1/10W 100K	1	AG-DS850HP
R9216	ERJ6GEYJ222	M.RESISTOR CH 1/10W 2.2K	1	AG-DS850HP

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
R9217	ERJ6GEYJ271	M.RESISTOR CH 1/10W 270	1	AG-DS850HP
R9218	ERJ6GEYJ272	M.RESISTOR CH 1/10W 2.7K	1	AG-DS850HP
R9219	ERJ6GEYJ822	M.RESISTOR CH 1/10W 8.2K	1	AG-DS850HP
R9220	ERJ6GEYJ152	M.RESISTOR CH 1/10W 1.5K	1	AG-DS850HP
R9221,22	ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	2	AG-DS850HP
R9223	ERJ6GEYJ102	M.RESISTOR CH 1/10W 1K	1	AG-DS850HP
R9224	ERJ6GEYG333	M.RESISTOR CH 1/10W 33K	1	AG-DS850HP
R9225	ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	1	AG-DS850HP
R9226	ERJ6GEYJ223	M.RESISTOR CH 1/10W 22K	1	AG-DS850HP
R9227	ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	1	AG-DS850HP
R9228	ERJ6GEYJ122	M.RESISTOR CH 1/10W 1.2K	1	AG-DS850HP
R9229	ERJ6GEYJ561	M.RESISTOR CH 1/10W 560	1	AG-DS850HP
R9230,31	ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	2	AG-DS850HP
R9232	ERJ6GEYJ681	M.RESISTOR CH 1/10W 680	1	AG-DS850HP
R9234	ERJ6GEYJ391	M.RESISTOR CH 1/10W 390	1	AG-DS850HP
R9235	ERJ6GEYJ330	M.RESISTOR CH 1/10W 33	1	AG-DS850HP
R9236	ERJ6GEYJ391	M.RESISTOR CH 1/10W 390	1	AG-DS850HP
R9237,38	ERJ6GEYJ102	M.RESISTOR CH 1/10W 1K	2	AG-DS850HP
R9239	ERJ6GEY0R00	M.RESISTOR CH 1/10W 0	1	AG-DS850HP
R9240	ERJ6GEYJ473	M.RESISTOR CH 1/10W 47K	1	AG-DS850HP
R9401	ERJ6GEYJ152	M.RESISTOR CH 1/10W 1.5K	1	
R9402	ERJ6GEYJ102	M.RESISTOR CH 1/10W 1K	1	
R9403	ERJ6GEYG153	M.RESISTOR CH 1/10W 15K	1	
R9404	ERJ6GEYJ152	M.RESISTOR CH 1/10W 1.5K	1	
R9405	ERJ6GEY0R00	M.RESISTOR CH 1/10W 0	1	AG-DS850HP
R9406	ERJ6GEYJ102	M.RESISTOR CH 1/10W 1K	1	
R9407	ERJ6GEYJ222	M.RESISTOR CH 1/10W 2.2K	1	
R9408	ERJ6GEY0R00	M.RESISTOR CH 1/10W 0	1	
R9409	ERJ6GEYG472	M.RESISTOR CH 1/10W 4.7K	1	AG-DS850HP
R9410,11	ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	2	AG-DS850HP
R9412	ERJ6GEYG472	M.RESISTOR CH 1/10W 4.7K	1	
R9413	ERJ6GEYJ104	M.RESISTOR CH 1/10W 100K	1	
R9419	ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	1	
R9420	ERJ6GEYJ223	M.RESISTOR CH 1/10W 22K	1	
R9421	ERJ6GEYJ221	M.RESISTOR CH 1/10W 220	1	
R9422	ERJ6GEYJ222	M.RESISTOR CH 1/10W 2.2K	1	
R9423	ERJ6GEY0R00	M.RESISTOR CH 1/10W 0	1	
R9424	ERJ6GEYJ332	M.RESISTOR CH 1/10W 3.3K	1	
R9426	ERJ6GEYJ105	M.RESISTOR CH 1/10W 1M	1	
R9427	ERJ6GEYJ122	M.RESISTOR CH 1/10W 1.2K	1	
R9428	ERJ6GEY0R00	M.RESISTOR CH 1/10W 0	1	
R9429	ERJ6GEYJ222	M.RESISTOR CH 1/10W 2.2K	1	
R9430	ERJ6GEYJ471	M.RESISTOR CH 1/10W 470	1	AG-DS850HP
R9431	ERJ6GEYJ102	M.RESISTOR CH 1/10W 1K	1	
R9432	ERJ6GEYJ272	M.RESISTOR CH 1/10W 2.7K	1	
R9434	ERJ6GEYJ222	M.RESISTOR CH 1/10W 2.2K	1	
R9435	ERJ6GEYJ273	M.RESISTOR CH 1/10W 27K	1	
R9436	ERJ6GEYG472	M.RESISTOR CH 1/10W 4.7K	1	
R9437	ERJ6GEYJ154	M.RESISTOR CH 1/10W 150K	1	
R9438	VRE0034E76	M.RESISTOR	1	
R9439	VRE0034E472	M.RESISTOR CH 1/10W 4.7K	1	
R9440	VRE0034E562	M.RESISTOR CH 1/10W 5.6K	1	
R9441,42	ERJ6GEYJ473	M.RESISTOR CH 1/10W 47K	2	
R9443	ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	1	
R9445,46	ERJ6GEYJ105	M.RESISTOR CH 1/10W 1M	2	AG-DS850HP
R9447	ERJ6GEYJ222	M.RESISTOR CH 1/10W 2.2K	1	AG-DS850HP
R9448	ERJ6GEYJ681	M.RESISTOR CH 1/10W 680	1	AG-DS850HP
R9449	ERJ6GEYJ152	M.RESISTOR CH 1/10W 1.5K	1	AG-DS850HP
R9456	ERJ6GEYJ102	M.RESISTOR CH 1/10W 1K	1	
R9458,59	ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	2	
R9461	ERJ6GEYJ152	M.RESISTOR CH 1/10W 1.5K	1	
R9462	ERJ6GEYJ105	M.RESISTOR CH 1/10W 1M	1	
R9464,65	ERJ6GEYJ470	M.RESISTOR CH 1/10W 47	2	
R9466	VRE0034E152	M.RESISTOR CH 1/10W 1.5K	1	
R9467	VRE0034E822	M.RESISTOR CH 1/10W 8.2K	1	
R9468	ERJ6GEYG472	M.RESISTOR CH 1/10W 4.7K	1	
R9469	ERJ6GEYJ152	M.RESISTOR CH 1/10W 1.5K	1	AG-DS850HP
R9470	ERJ6GEYJ102	M.RESISTOR CH 1/10W 1K	1	
R9473	ERJ6GEYJ133	M.RESISOTR CH 1/10W 13K	1	
R9475	ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	1	
R9477	ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	1	
R9478	ERJ6GEYJ271	M.RESISTOR CH 1/10W 270	1	
R9479,80	ERJ6GEYJ152	M.RESISTOR CH 1/10W 1.5K	2	
R9482	ERJ6GEYJ222	M.RESISTOR CH 1/10W 2.2K	1	
R9483	ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	1	

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
R9484	ERJ6GEYJ222	M.RESISTOR CH 1/10W 2.2K	1	
R9485	ERJ6GEYJ223	M.RESISTOR CH 1/10W 22K	1	
R9486	ERJ6GEYJ822	M.RESISTOR CH 1/10W 8.2K	1	
R9489	ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	1	
R9490	ERJ6GEYJ223	M.RESISTOR CH 1/10W 22K	1	
R9491	ERJ6GEYJ681	M.RESISTOR CH 1/10W 680	1	
R9492	ERJ6GEY0R00	M.RESISTOR CH 1/10W 0	1	
R9493	ERJ6GEYJ471	M.RESISTOR CH 1/10W 470	1	
R9494	ERJ6GEYJ102	M.RESISTOR CH 1/10W 1K	1	
R9498	ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	1	
R9499	ERJ6GEY0R00	M.RESISTOR CH 1/10W 0	1	
R9500	ERJ6GEYJ331	M.RESISTOR CH 1/10W 330	1	
R9501	ERJ6GEYJ562	M.RESISTOR CH 1/10W 5.6K	1	
R9502	ERJ6GEY0R00	M.RESISTOR CH 1/10W 0	1	
R9503,04	ERJ6GEYG333	M.RESISTOR CH 1/10W 33K	2	
R9506	ERJ6GEYJ470	M.RESISTOR CH 1/10W 47	1	
R9507,08	ERJ6GEYJ271	M.RESISTOR CH 1/10W 270	2	
R9509	ERJ6GEYJ152	M.RESISTOR CH 1/10W 1.5K	1	
R9510	ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	1	
R9511	ERJ6GEYJ102	M.RESISTOR CH 1/10W 1K	1	
SW9401	VSS0126	SWITCH	1	<R>
TH9401,02	ERTD2FHL102S	THERMISTOR 1K	2	
VR9401	EVN32CA00B23	V.RESISTOR 2K	1	AG-DS850HP
VR9403	EVN32CA00B24	V.RESISTOR 20K	1	
VR9405	EVN32CA00B14	V.RESISTOR 10K	1	AG-DS850HP
VR9406,07	EVN32CA00B53	V.RESISTOR 5K	2	
VR9410	EVN32CA00B23	V.RESISTOR 2K	1	
X9201	VSX0549	CRYSTAL OSCILLATOR	1	<R>AG-DS850HP
X9202	VSX0330	CRYSTAL OSCILLATOR	1	<R>AG-DS850HP
X9401	VSX0160	CRYSTAL OSCILLATOR	1	<R>

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
	VEP06903C	P.C.BOARD W/COMPONENT		
		INTERFACE		
C61001	ECUM1H103ZFN	C.CAPACITOR 50V 0.01U	1	
C61002,03	ECUM1H150JCN	C.CAPACITOR CH 50V 15P	2	
C61004	ECEA0JU101	E.CAPACITOR 6.3V 100U	1	
C61005-07	ECUM1H103ZFN	C.CAPACITOR 50V 0.01U	3	
C61008	ECEA0JU471	E.CAPACITOR 6.3V 470U	1	
C61009,10	ECUM1H680JCN	C.CAPACITOR CH 50V 68P	2	
C61011	ECUM1H103ZFN	C.CAPACITOR 50V 0.01U	1	
C61012	ECQB1H104JF	P.CAPACITOR 50V 0.1U	1	
C61013	ECEA1HU3R3	E.CAPACITOR 50V 3.3U	1	
C61014	ECUM1E104ZFN	C.CAPACITOR CH 25V 0.1U	1	
C61015	ECEA0JU101	E.CAPACITOR 6.3V 100U	1	
C61016-21	ECUM1H103ZFN	C.CAPACITOR 50V 0.01U	6	
C61026-29	ECUM1H103ZFN	C.CAPACITOR 50V 0.01U	4	
C61030	ECUM1E104ZFN	C.CAPACITOR CH 25V 0.1U	1	
C61031-34	ECEA0JU470	E.CAPACITOR 6.3V 47U	4	
C61035,36	ECEA1HU010	E.CAPACITOR 50V 1U	2	
C61037-48	ECUM1H103ZFN	C.CAPACITOR 50V 0.01U	12	
C61049-51	ECEA1CU100	E.CAPACITOR 16V 10U	3	
C61052	ECUM1E104ZFN	C.CAPACITOR CH 25V 0.1U	1	
C61053	ECEA1CU100	E.CAPACITOR 16V 10U	1	
C61054	ECUM1H390JCN	C.CAPACITOR CH 50V 39P	1	
C61055	ECUM1H223KBN	C.CAPACITOR CH 50V 0.022U	1	
C61056	ECUM1H103KBN	C.CAPACITOR CH 50V 0.01U	1	
D61001-04	11EQS04	DIODE	4	<R>
D61005-12	MA153	DIODE	8	<R>
FL61001	VLF1016A470	FILTER	1	
FL61004	VLF0634	FILTER	1	
IC61001	HD641180XF6	IC	1	<R>
IC61002	VSI1403G	IC	1	<R>
IC61003	X22C12P	IC	1	<R>
IC61004	UPD65012FA19	IC	1	<R>
IC61005	TL7705CPSB	IC	1	<R>
IC61006	MC74HC4538A	IC	1	<R>
IC61007	MC74HC32AF	IC	1	<R>
IC61008	TC7W00F	IC	1	<R>
IC61009	TC7W04F	IC	1	<R>
IC61010	MC74HC14AF	IC	1	<R>
IC61011	MC34051M	IC	1	<R>
IC61013	MC74HC541AF	IC	1	<R>
IC61014	MC74HC245AF	IC	1	<R>
IC61015	MC74HC541AF	IC	1	<R>
IC61016	MC74HC138AF	IC	1	<R>
IC61017	MB89363BPF	IC	1	<R>
IC61018,19	MB86023PF	IC	2	<R>
IC61020-22	MC74HC4053F	IC	3	<R>
IC61023	NJM2233BMA	IC	1	<R>
L61001	VLQEL05S470J	COIL 47UH	1	
L61002	VLQ0067	COIL	1	
L61003,04	VLP0054	COIL	2	
L61006	VLP0017	COIL	1	
L61007-09	VLQEL05S470J	COIL 47UH	3	
P61001	VJP3176B100	CONNECTOR	1	
P61002	VJP3076	CONNECTOR	1	
P61003	VJS3406D024	CONNECTOR	1	

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
P61004	VJS3505C060	CONNECTOR	1	
P61009	VJP3092	CONNECTOR (MALE)	1	
P61010	VJP3088	CONNECTOR	1	
Q61001	MSB709-R	TRANSISTOR	1	<R>
Q61002,03	MSD601-R	TRANSISTOR	2	<R>
QR61001,02	MRN1403	TRANSISTOR	2	<R>
R61001,02	ERJ6GEYJ152	M.RESISTOR CH 1/10W 1.5K	2	
R61003,04	ERJ6GEYJ101	M.RESISTOR CH 1/10W 100	2	
R61005,06	ERJ6GEYJ152	M.RESISTOR CH 1/10W 1.5K	2	
R61007-12	ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	6	
R61014-30	ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	17	
R61032,33	ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	2	
R61034	ERJ6GEYJ102	M.RESISTOR CH 1/10W 1K	1	
R61035	ERJ6GEYG472	M.RESISTOR CH 1/10W 4.7K	1	
R61036,37	ERJ6GEYJ473	M.RESISTOR CH 1/10W 47K	2	
R61038-47	ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	10	
R61048,49	ERJ6GEYJ473	M.RESISTOR CH 1/10W 47K	2	
R61050	ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	1	
R61051-55	ERJ6GEYJ473	M.RESISTOR CH 1/10W 47K	5	
R61056-64	ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	8	
R61064	ERJ6GEYJ473	M.RESISTOR CH 1/10W 47K	1	
R61065	ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	1	
R61066-92	ERJ6GEYJ101	M.RESISTOR CH 1/10W 100	27	
R61094-13	ERJ6GEYJ101	M.RESISTOR CH 1/10W 100	20	
R61114-21	ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	8	
R61122-37	ERJ6GEYJ101	M.RESISTOR CH 1/10W 100	16	
R61140-58	ERJ6GEYJ101	M.RESISTOR CH 1/10W 100	19	
R61160-79	ERJ6GEYJ331	M.RESISTOR CH 1/10W 330	20	
R61180-82	ERJ6GEYJ101	M.RESISTOR CH 1/10W 100	3	
R61184	ERJ6GEYJ273	M.RESISTOR CH 1/10W 27K	1	
R61185	ERJ6GEYJ102	M.RESISTOR CH 1/10W 1K	1	
R61186	ERJ6GEYJ223	M.RESISTOR CH 1/10W 22K	1	
R61187	ERJ6GEYJ273	M.RESISTOR CH 1/10W 27K	1	
R61188	ERJ6GEYJ330	M.RESISTOR CH 1/10W 33	1	
R61189	ERJ6GEYJ102	M.RESISTOR CH 1/10W 1K	1	
R61190	ERJ6GEYJ152	M.RESISTOR CH 1/10W 1.5K	1	
R61191,92	ERJ6GEYJ223	M.RESISTOR CH 1/10W 22K	2	
R61198	ERJ6GEYJ223	M.RESISTOR CH 1/10W 22K	1	
X61001	VSX0373	CRYSTAL OSCILLATOR	1	<R>
		MISCELLANEOUS		
	VJS2336A028	IC SOCKET	1	

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
	VEP06913A	P.C.BOARD W/COMPONENT		AG-DS850HP
		TIME CODE		
	VEP06913B	P.C.BOARD W/COMPONENT		AG-DS840HP
		TIME CODE		
C68001,02	ECUM1H103ZFN	C.CAPACITOR 50V 0.01U	2	
C68003	ECEV1HVR22	E.CAPACITOR 50V 0.22U	1	
C68004,05	ECUM1H220JCN	C.CAPACITOR CH 50V 22P	2	
C68006-09	ECUM1H103ZFN	C.CAPACITOR 50V 0.01U	4	
C68010,11	ECUM1H150JCN	C.CAPACITOR CH 50V 15P	2	
C68012-16	ECUM1H103ZFN	C.CAPACITOR 50V 0.01U	5	
C68017	ECUM1H180JCN	C.CAPACITOR CH 50V 18P	1	
C68018	ECUM1H270JCN	C.CAPACITOR CH 50V 27P	1	
C68019	ECUM1H560JCN	C.CAPACITOR CH 50V 56P	1	
C68020	ECEV1CV100	E.CAPACITOR 16V 10U	1	
C68021-27	ECUM1H103ZFN	C.CAPACITOR 50V 0.01U	7	
C68028	ECUM1E104ZFN	C.CAPACITOR CH 25V 0.1U	1	
C68029,30	ECUM1H103ZFN	C.CAPACITOR 50V 0.01U	2	
C68031	ECUM1H050CCN	C.CAPACITOR CH 50V 5P	1	AG-DS850HP
C68032	ECUM1H560JCN	C.CAPACITOR CH 50V 56P	1	AG-DS850HP
C68033	ECUM1H060DCN	C.CAPACITOR CH 50V 6P	1	AG-DS850HP
C68034	ECUM1H103ZFN	C.CAPACITOR 50V 0.01U	1	
C68035	ECUM1E104ZFN	C.CAPACITOR CH 25V 0.1U	1	
C68036	ECEV1HV2R2	E.CAPACITOR 50V 2.2U	1	
C68037	ECEV1CV100	E.CAPACITOR 16V 10U	1	
C68038,39	ECUM1H103ZFN	C.CAPACITOR 50V 0.01U	2	
C68040	ECUM1H102JCN	C.CAPACITOR CH 50V 1000P	1	
C68041	ECUM1H103ZFN	C.CAPACITOR 50V 0.01U	1	AG-DS850HP
C68042	ECUM1H102JCN	C.CAPACITOR CH 50V 1000P	1	AG-DS850HP
C68043	ECHU1C102JA5	P.CAPACITOR 16V 1000P	1	AG-DS850HP
C68044	ECUM1H103ZFN	C.CAPACITOR 50V 0.01U	1	AG-DS850HP
C68045	ECUM1H151JCN	C.CAPACITOR CH 50V 150P	1	AG-DS850HP
C68046	ECEV1CV100	E.CAPACITOR 16V 10U	1	
C68047	ECUM1E104ZFN	C.CAPACITOR CH 25V 0.1U	1	
C68048	ECUM1H102JCN	C.CAPACITOR CH 50V 1000P	1	
D68001,02	MA151K	DIODE	2	<R>
D68004,05	MA151K	DIODE	2	<R>
IC68001	UPD78220GJ	IC	1	<R>
IC68002	MN51040VPI	IC	1	<R>
IC68003	MB8421-90LPF	IC	1	<R>
IC68004	51951AML600D	IC	1	<R>
IC68005,6	MC74HC32AF	IC	2	<R>
IC68007	MC74HC04AF	IC	1	<R>
IC68008	MC74HC32AF	IC	1	<R>
IC68009	MC74HC373AF	IC	1	<R>
IC68011	MC74HC4053F	IC	1	<R>
IC68012	AN1319S	IC	1	<R>
IC68013,4	MC74HC4053F	IC	2	<R>
IC68015	TC74HC221AF	IC	1	<R>AG-DS850HP
IC68016	AN6912S	IC	1	<R>
IC68017	UPD65005X436	IC	1	<R>AG-DS850HP
IF68010	VJF1046	IC SOCKET	1	
IS68010	VJS3427X028	IC SOCKET	1	
IS68010	VSI1404C	IC	1	
L68001	VLQ0319K221	COIL 220UH	1	AG-DS850HP

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
P68001	VJP3507C060	CONNECTOR	1	
Q68001	MSB709-R	TRANSISTOR	1	<R>AG-DS850HP
R68001-03	ERJ6GEYJ473	M.RESISTOR CH 1/10W 47K	3	
R68004	ERJ6GEYJ105	M.RESISTOR CH 1/10W 1M	1	
R68005,06	ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	2	
R68007	ERJ6GEYJ222	M.RESISTOR CH 1/10W 2.2K	1	
R68008	ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	1	
R68009	ERJ6GEYJ122	M.RESISTOR CH 1/10W 1.2K	1	
R68010	ERJ6GEYJ562	M.RESISTOR CH 1/10W 5.6K	1	
R68011,12	ERJ6GEYJ223	M.RESISTOR CH 1/10W 22K	2	
R68013	ERJ6GEYJ562	M.RESISTOR CH 1/10W 5.6K	1	
R68014	ERJ6GEYJ224	M.RESISTOR CH 1/10W 220K	1	
R68015,16	ERJ6GEYJ272	M.RESISTOR CH 1/10W 2.7K	2	AG-DS850HP
R68017	ERJ6GEYJ102	M.RESISTOR CH 1/10W 1K	1	AG-DS850HP
R68018	ERJ6GEYJ104	M.RESISTOR CH 1/10W 100K	1	
R68019	ERJ6GEYJ332	M.RESISTOR CH 1/10W 3.3K	1	
R68020	ERJ6GEYJ152	M.RESISTOR CH 1/10W 1.5K	1	
R68021	ERJ6GEYJ394	M.RESISTOR CH 1/10W 390K	1	
R68022	ERJ6GEYG132	M.RESISTOR CH 1/10W 1.3K	1	
R68023	ERJ6GEYJ122	M.RESISTOR CH 1/10W 1.2K	1	
R68024,25	ERJ6GEYJ104	M.RESISTOR CH 1/10W 100K	2	
R68026	ERJ6GEYJ562	M.RESISTOR CH 1/10W 5.6K	1	
R68027	ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	1	
R68028	ERJ6GEYJ123	M.RESISTOR CH 1/10W 12K	1	
R68029	ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	1	
R68030	ERJ6GEYJ223	M.RESISTOR CH 1/10W 22K	1	
R68031	ERJ6GEYJ123	M.RESISTOR CH 1/10W 12K	1	
R68032	VRE0034E272	M.RESISTOR CH 1/10W 2.7K	1	AG-DS850HP
R68034	VRE0034E153	M.RESISTOR CH 1/10W 15K	1	AG-DS850HP
R68036,37	ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	2	AG-DS850HP
R68038	ERJ6GEYJ473	M.RESISTOR CH 1/10W 47K	1	
R68039	ERJ6GEYG103	M.RESISTOR CH 1/10W 10K	1	
R68040	ERJ6GEYG331	M.RESISTOR CH 1/10W 330	1	
R68041	ERJ6GEYJ224	M.RESISTOR CH 1/10W 220K	1	
R68042,43	ERJ6GEYJ102	M.RESISTOR CH 1/10W 1K	2	
R68044	ERJ6GEYJ223	M.RESISTOR CH 1/10W 22K	1	
R68045	ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	1	
R68046,47	ERJ6GEYJ123	M.RESISTOR CH 1/10W 12K	2	
R68048	ERJ6GEYJ105	M.RESISTOR CH 1/10W 1M	1	
R68049	ERJ6GEYJ393	M.RESISTOR CH 1/10W 39K	1	AG-DS850HP
R68050	ERJ6GEYJ473	M.RESISTOR CH 1/10W 47K	1	
SW68001	VSS0342	SWITCH	1	<R>AG-DS850HP
VR68001	VRV0161B203	V.RESISTOR 20K	1	AG-DS850HP
X68001	VSX0499	CRYSTAL OSCILLATOR	1	<R>
X68002	VSX0498	CRYSTAL OSCILLATOR	1	<R>
X68003	VSX0614	CRYSTAL OSCILLATOR	1	<R>

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
	VEP01559A	P.C.BOARD W/COMPONENT		
		POWER (1)		
C1001,02	VCK0260M332A	C.CAPACITOR 3300P	2	<!>
C1003	ECQU2A224MN	P.CAPACITOR 250V 0.22U	1	<!>
C1006	VCK0260M152A	C.CAPACITOR 250V 1500P	1	<!>
D1001	D3SBA60	DIODE	1	<!><R>
F1001	XBA1C40NB5	FUSE	1	<!>
L1001	ELF18D605	COIL	1	<!>
P1001	VJP2639	CONNECTOR	1	
		MISCELLANEOUS		
E35	VJF0318	FUSE HOLDER	2	<!>
E36	VMZ0429	FUSE COVER	1	<!>
E37	VMZ0965	CAPACITOR COVER	1	<!>
E44	VMZ1798	CAPACITOR COVER	1	<!>
E45	VMZ1608	CAPACITOR COVER	2	<!>

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
	VEP01560A	P.C.BOARD W/COMPONENT		
		POWER (2)		
C1008	ECEC2DC821	E.CAPACITOR 200V 820U	1	
C1009	ECEA2AGE100	E.CAPACITOR 100V 10U	1	
C1010	ECEA2DGE010	E.CAPACITOR 200V 1U	1	
C1013	ECQE6473MZ	P.CAPACITOR 630V 0.047U	1	
C1014	ECKD2H151KB	C.CAPACITOR 500V 150P	1	
C1015	ECA1VXLV470	E.CAPACITOR 35V 47U	1	
C1016	ECCF1H271J	C.CAPACITOR 50V 270P	1	
C1017	ECKF1H102KB	C.CAPACITOR 50V 1000P	1	
C1018	ECA1CXLV221	E.CAPACITOR CH 16V 220U	1	
C1019	ECQB1H473JF	P.CAPACITOR 50V 0.047U	1	
C1021,22	ECA1AFZ332	E.CAPACITOR 10V 3300U	2	
C1023	ECA1CFQ152	E.CAPACITOR 16V 1500U	1	
C1024	ECQV1H564JZ	P.CAPACITOR 50V 0.56U	1	
C1025	ECCD2H101J	C.CAPACITOR 500V 100P	1	
C1026	ECA1EFZ122	E.CAPACITOR 25V 1200U	1	
C1028	ECKF1H103ZF	C.CAPACITOR 50V 0.01U	1	
C1029	ECEA1CGE470	E.CAPACITOR 16V 47U	1	
C1031	ECA1VFQ681	E.CAPACITOR 35V 680U	1	
C1032	ECCD2H101J	C.CAPACITOR 500V 100P	1	
C1033	ECEA1JFE560	E.CAPACITOR 63V 56U	1	
C1036	ECA1CFZ821	E.CAPACITOR 16V 820U	1	
C1038	ECCD2H101J	C.CAPACITOR 500V 100P	1	
C1039	ECA1EFZ331	E.CAPACITOR 25V 330U	1	
D1005	MA723	DIODE	1	<R>
D1006	8P2M	DIODE	1	<R>
D1007	VSD0002	DIODE	1	<R>
D1008	FMB-24H	DIODE	1	<R>
D1010,11	FMLG12SP	DIODE	2	<R>
D1012	VSD0001	DIODE	1	<R>
D1013	RL2ZP	DIODE	1	<R>
D1014	VSD0002	DIODE	1	<R>
D1015	VSD0001	DIODE	1	<R>
D1016	MA4200H	DIODE	1	<R>
D1017	31DQ04	DIODE	1	<R>
D1019	RD120E	DIODE	1	<R>
D1020	MA4360M	DIODE	1	<R>
IC1001	STRM6543LF	IC	1	<R>
IC1002	TL431CLP	IC	1	<R>
L1003	VLP0074	COIL	1	
L1004	VLQ0605	COIL	1	
L1006	VLQ0354	COIL	1	
L1007,08	VLQ0410	COIL	2	
L1009	EXCELSA35B	COIL	1	
P1002	VJP1153	CONNECTOR (MALE)	1	
P1003	VJP3088	CONNECTOR	1	
Q1001	PS2561L1-1	TRANSISTOR-PHOTO COUPLER	1	<!><R>
Q1002	2SD1474	TRANSISTOR	1	<R>
R1004,05	ERG3SJ563	M.RESISTOR 3W 56K	2	
R1006	ERDS2FJ221	C.RESISTOR 1/4W 220	1	
R1007	ERDS2FJ270	C.RESISTOR 1/4W 27	1	
R1008	ERDS2FJ220	C.RESISTOR 1/4W 22	1	

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
R1009	ERW1PKR18	W.RESISTOR 1W 0.18	1	
R1010	ERDS2FJ152	C.RESISTOR 1/4W 1.5K	1	
R1011	ERDS2FJ101	C.RESISTOR 1/4W 100	1	
R1012	ERDS2FJ103	C.RESISTOR 1/4W 10K	1	
R1013	ERDS2TJ271	C.RESISTOR 1/4W 270	1	
R1014	ERDS2TJ561	C.RESISTOR 1/4W 560	1	
R1015	ER0S2CKF2701	M.RESISTOR 1/4W	1	
R1016	ERDS2TO	C.RESISTOR 1/4W 0	1	
R1017	ER0S2CKF2201	M.RESISTOR 1/4W 2.2K	1	
R1018,19	ERDS2FJ333	C.RESISTOR 1/4W 33K	2	
R1020,21	ERDS2FJ105	C.RESISTOR 1/4W 1M	2	
R1022	ERDS2FJ224	C.RESISTOR 1/4W 220K	1	
R1024	ERG1SJ271	M.RESISTOR 1W 270	1	
R1025	ERDS2FJ102	C.RESISTOR 1/4W 1K	1	
R1026	VSF0078	M.RESISTOR	1	<!>
R1027	ER0S2CKG6202	M.RESISTOR 1/4W 62K	1	
R1028	ERX3SJ1R0	M.RESISTOR 3W 1	1	
R1030	ERDS2FJ3R9	C.RESISTOR 1/4W 3.9	1	
R1031	ER0S2TKG2703	M.RESISTOR 1/4W	1	
R1033	ER0S2TKG2703	M.RESISTOR 1/4W	1	
R1034,35	ERDS2FJ333	C.RESISTOR 1/4W 33K	2	
T1001	VLT0728	TRANSFORMER	1	<!>
		MISCELLANEOUS		
E51	VSC3434	SHIELD CASE	1	
E52	XYN3+F8	SCREW	1	

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
	VEP04328A	P.C.BOARD W/COMPONENT		AG-DS850HP ONLY
		AUDIO METER		
D4201-06	LN440YCPUV	DIODE	6	<R>
D4207,08	MA165VT	DIODE	2	<R>
P4201	VJP3081	CONNECTOR (MALE)	1	
R4201,02	ERDS2TJ151	C.RESISTOR 1/4W 150	2	
R4203	ERDS2TJ222	C.RESISTOR 1/4W 2.2K	1	
R4204	ERDS2TJ272	C.RESISTOR 1/4W 2.7K	1	
R4205	ERDS2TJ222	C.RESISTOR 1/4W 2.2K	1	
R4206	ERDS2TJ272	C.RESISTOR 1/4W 2.7K	1	
R4207,08	ER0S2CKG5100	M.RESISTOR 1/4W 510	2	
R4209,10	ERDS2TJ151	C.RESISTOR 1/4W 150	2	
VR4201-04	EVJ9MA040B14	V.RESISTOR 10K	4	<R>
		MISCELLANEOUS		
E54	VMP3282	METER ANGLE	1	
E55	VGF0245	METER HOLDER	2	
E56	VSE0117	METER	1	
E57	VSE0115	AUDIO METER	1	

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
	VEP04418A	P.C.BOARD W/COMPONENT		AG-DS850HP
		FRONT JACK		
	VEP04418B	P.C.BOARD W/COMPONENT		AG-DS840HP
		FRONT JACK		
C4901,02	ECKF1H101KB	C.CAPACITOR 50V 100P	2	
C4910	ECKF1H103ZF	C.CAPACITOR 50V 0.01U	1	
D4901	MA165VT	DIODE	1	<R>AG-DS850HP
J4901	VJJ0378	M6 JACK	1	
L4901,02	VLQEL05S101J	COIL 100UH	2	
P4901	VJP3529	CONNECTOR	1	
P4902	VJP3076	CONNECTOR	1	
R4901	ERDS2TJ333	C.RESISTOR 1/4W 33K	1	AG-DS850HP
R4902	ERDS2TJ103	C.RESISTOR 1/4W 10K	1	AG-DS850HP
R4903	ERDS2TJ393	C.RESISTOR 1/4W 39K	1	
R4904	ERDS2TJ153	C.RESISTOR 1/4W 15K	1	
R4905	ERDS2TJ682	C.RESISTOR 1/4W 6.8K	1	
R4906	ERDS2TJ222	C.RESISTOR 1/4W 2.2K	1	
SW4901	VSR0103	SWITCH	1	<R>
VR4901	EVUNCAF15B23	V.RESISTOR 2K	1	
VR4902	EVU55AF15B15	V.RESISTOR 100K	1	
VR4903	EVU023015B14	V.RESISTOR 10K	1	AG-DS850HP
		MISCELLANEOUS		
E59	VMP4231	JACK ANGLE	1	
E60	VGU6484	BUTTON	4	(3):AG-DS840HP
E61	VMP4434	FRONT JACK ANGLE (2)	1	

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
	VEP00T59A	P.C.BOARD W/COMPONENT		AG-DS850HP
		MOTHER		
	VEP00T59B	P.C.BOARD W/COMPONENT		AG-DS840HP
		MOTHER		
P910	VJP1147	CONNECTOR (MALE) 12P	1	
P921-23	VJP3203A020Z	CONNECTOR (MALE) 20P	3	
P931	VJS2898A100	CONNECTOR	1	
P932	VJS2898A064	CONNECTOR (FEMALE) 64P	1	
P933-35	VJS2898A100	CONNECTOR	3	
P941,42	VJS2898A064	CONNECTOR (FEMALE) 64P	2	
P961-64	VJS3152	CONNECTOR (FEMALE)	4	
P971-74	VJS3490A13	CONNECTOR	4	
		MISCELLANEOUS		
E38	VMP4222	CONNECTOR ANGLE (1)	1	
E39	VMP4223	CONNECTOR ANGLE (2)	1	
E42	VJF0816	CORD CLAMPER	1	
E41	XYE3+EF8FZ	SCREW	17	
	VMT0076	RUBBER CUSHION	2	
E40	XTV26+8J	SCREW	14	

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
	VEP01478C	P.C.BOARD W/COMPONENT		
		POWER CONNECT		
C1101,02	ECQU2A224MN	P.CAPACITOR 250V 0.22U	2	<!>
L1101	ELF18D605	COIL	1	<!>
P1101	VJP2638	CONNECTOR (MALE)	1	<!>
P1102	VJS2985	CONNECTOR	1	<!>
R1101	ERC12GM334	S.RESISTOR 1/2W 330K	1	<!>
		MISCELLANEOUS		
E46	VMZ1305	CAPACITOR COVER	2	<!>

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
	VEP02417B	P.C.BOARD W/COMPONENT		
		REEL DRIVE		
C2701	ECQV1H104JZ	P.CAPACITOR 50V 0.1U	1	
C2702	ECEA1EKA470	E.CAPACITOR 25V 47U	1	
C2703	ECEA0JKA470	E.CAPACITOR 6.3V 47U	1	
C2704	ECUM1H333KBN	C.CAPACITOR CH 50V 0.033U	1	
C2705	ECQV1H564JZ	P.CAPACITOR 50V 0.56U	1	
C2706-08	ECEA1HKA2R2	E.CAPACITOR 50V 2.2U	3	
C2709-12	ECUM1H333KBN	C.CAPACITOR CH 50V 0.033U	4	
C2713	ECEA0JKA470	E.CAPACITOR 6.3V 47U	1	
C2714	ECEA0JKA101	E.CAPACITOR 6.3V 100U	1	
C2715-17	ECEA0JKA470	E.CAPACITOR 6.3V 47U	3	
C2718	ECQV1H104JZ	P.CAPACITOR 50V 0.1U	1	
C2719	ECEA1EKA470	E.CAPACITOR 25V 47U	1	
C2720	ECEA0JKA470	E.CAPACITOR 6.3V 47U	1	
C2721	ECUM1H333KBN	C.CAPACITOR CH 50V 0.033U	1	
C2722	ECQV1H564JZ	P.CAPACITOR 50V 0.56U	1	
C2723-25	ECEA1HKA2R2	E.CAPACITOR 50V 2.2U	3	
C2726-29	ECUM1H333KBN	C.CAPACITOR CH 50V 0.033U	4	
D2701	MA151K	DIODE	1	<R>
D2702	MA151WK	DIODE	1	<R>
D2703	MA151K	DIODE	1	<R>
D2704	MA153	DIODE	1	<R>
D2705	MA151K	DIODE	1	<R>
D2706	MA151WK	DIODE	1	<R>
D2707	MA151K	DIODE	1	<R>
D2708	MA153	DIODE	1	<R>
IC2701,02	XRA6435S	IC	2	<R>
IC2703	LM358PS	IC	1	<R>
IC2704	MC14053BF	IC	1	<R>
IC2705	LM339NS	IC	1	<R>
IC2706	LM358PS	IC	1	<R>
J2701	ERJ6GEY0R00	M.RESISTOR CH 1/10W 0	1	
L2701-04	VLQ0460	COIL	4	
P2701	VJS3135	CONNECTOR (FEMALE)	1	
P2702	VJS2149W	CONNECTOR (FEMALE)	1	
P2703	VJS3202B008	CONNECTOR (FEMALE) 8P	1	
P2704,05	VJS1412	CONNECTOR (FEMALE)	2	
Q2701	MSD601-R	TRANSISTOR	1	<R>
QR2701	MRN1404	TRANSISTOR	1	<R>
R2701	ERJ6GEYG102	M.RESISTOR CH 1/10W 1K	1	
R2702	ERJ6GEYJ101	M.RESISTOR CH 1/10W 100	1	
R2703	ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	1	
R2704	ERJ6GEYJ223	M.RESISTOR CH 1/10W 22K	1	
R2705	ERJ6GEYJ123	M.RESISTOR CH 1/10W 12K	1	
R2706	ERJ6GEYJ223	M.RESISTOR CH 1/10W 22K	1	
R2707,08	ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	2	

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
R2709	ERJ6GEYJ105	M.RESISTOR CH 1/10W 1M	1	
R2710	ERJ6GEYJ182	M.RESISTOR CH 1/10W 1.8K	1	
R2711	ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	1	
R2712	ERJ6GEYJ102	M.RESISTOR CH 1/10W 1K	1	
R2713,14	ERDS2TJ330	C.RESISTOR 1/4W 33	2	
R2715	ERX12SJ1R0	M.RESISTOR CH 1/2W 1	1	
R2716	ERDS2TJ330	C.RESISTOR 1/4W 33	1	
R2717	ERJ6GEYJ101	M.RESISTOR CH 1/10W 100	1	
R2718	ERJ6GEYJ272	M.RESISTOR CH 1/10W 2.7K	1	
R2719	ERJ6GEYJ822	M.RESISTOR CH 1/10W 8.2K	1	
R2720	ERJ6GEYJ221	M.RESISTOR CH 1/10W 220	1	
R2721	ERJ6GEYJ102	M.RESISTOR CH 1/10W 1K	1	
R2722,23	ERJ6GEYJ222	M.RESISTOR CH 1/10W 2.2K	2	
R2724	ERJ6GEYJ224	M.RESISTOR CH 1/10W 220K	1	
R2725,26	ERJ6GEYJ102	M.RESISTOR CH 1/10W 1K	2	
R2727	ERJ6GEYJ681	M.RESISTOR CH 1/10W 680	1	
R2728	ERJ6GEYJ823	M.RESISTOR CH 1/10W 82K	1	
R2729	ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	1	
R2730	ERJ6GEYJ101	M.RESISTOR CH 1/10W 100	1	
R2731	ERJ6GEYJ122	M.RESISTOR CH 1/10W 1.2K	1	
R2732	ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	1	
R2733	ERJ6GEYJ102	M.RESISTOR CH 1/10W 1K	1	
R2734,35	ERDS2TJ330	C.RESISTOR 1/4W 33	2	
R2736	ERX12SJR47	M.RESISTOR CH 1/2W 0.47	1	
R2737	ERDS2TJ330	C.RESISTOR 1/4W 33	1	
R2738	ERJ6GEYJ102	M.RESISTOR CH 1/10W 1K	1	
R2739	ERJ6GEYJ221	M.RESISTOR CH 1/10W 220	1	
R2740	ERJ6GEYJ224	M.RESISTOR CH 1/10W 220K	1	
R2741,42	ERJ6GEYJ102	M.RESISTOR CH 1/10W 1K	2	
R2743	ERJ6GEYJ223	M.RESISTOR CH 1/10W 22K	1	
		MISCELLANEOUS		
E47	VMX2183	SPACER	1	

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
	VEP03A66C	P.C.BOARD W/COMPONENT		AG-DS850HP
		VIDEO I/O		
	VEP03A66D	P.C.BOARD W/COMPONENT		AG-DS840HP
		VIDEO I/O		
	VEP00V57A	P.C.BOARD W/COMPONENT		FOR VEP03A66C
		VIDEO I/O SUB		
	VEP00V57B	P.C.BOARD W/COMPONENT		FOR VEP03A66D
		VIDEO I/O SUB		
C3001	ECEV0JV101	E.CAPACITOR 6.3V 100U	1	AG-DS850HP
C3002	ECUM1H103KBN	C.CAPACITOR CH 50V 0.01U	1	AG-DS850HP
C3003	ECUM1H390JCN	C.CAPACITOR CH 50V 39P	1	AG-DS850HP
C3005	ECEV0JV220	E.CAPACITOR 6.3V 22U	1	AG-DS850HP
C3006	ECUM1H332KBN	C.CAPACITOR CH 50V 3300P	1	AG-DS850HP
C3007	ECUM1H103KBN	C.CAPACITOR CH 50V 0.01U	1	AG-DS850HP
C3008	ECEV0JV220	E.CAPACITOR 6.3V 22U	1	AG-DS850HP
C3009	ECEV1HV3R3	E.CAPACITOR 50V 3.3U	1	AG-DS850HP
C3010	ECUM1H331JCN	C.CAPACITOR CH 50V 330P	1	AG-DS850HP
C3011	ECUM1H102JCN	C.CAPACITOR CH 50V 1000P	1	AG-DS850HP
C3013	ECEV1CV470Q	E.CAPACITOR CH 16V 47U	1	AG-DS850HP
C3014	ECUM1H103KBN	C.CAPACITOR CH 50V 0.01U	1	AG-DS850HP
C3015	ECEV1CV470Q	E.CAPACITOR CH 16V 47U	1	
C3016	ECUM1H103KBN	C.CAPACITOR CH 50V 0.01U	1	
C3017	ECUM1H820JCN	C.CAPACITOR CH 50V 82P	1	AG-DS850HP
C3018	ECUM1E224ZFN	C.CAPACITOR CH 25V 0.22U	1	AG-DS850HP
C3019	ECEV0JV470	E.CAPACITOR 6.3V 47U	1	
C3020	ECUM1H103KBN	C.CAPACITOR CH 50V 0.01U	1	
C3021	ECUM1C154KBN	C.CAPACITOR CH 16V 0.15U	1	AG-DS850HP
C3022	ECEV0JV470	E.CAPACITOR 6.3V 47U	1	
C3023	ECUM1H103KBN	C.CAPACITOR CH 50V 0.01U	1	
C3024	ECUM1E104KBN	C.CAPACITOR CH 25V 0.1U	1	AG-DS850HP
C3025	ECUM1H103KBN	C.CAPACITOR CH 50V 0.01U	1	
C3026	ECEV1CV470Q	E.CAPACITOR CH 16V 47U	1	
C3027	ECUM1E104KBN	C.CAPACITOR CH 25V 0.1U	1	AG-DS850HP
C3028	ECUM1H103KBN	C.CAPACITOR CH 50V 0.01U	1	AG-DS850HP
C3030-32	ECUM1H103KBN	C.CAPACITOR CH 50V 0.01U	3	AG-DS850HP
C3033	ECEV0JV220	E.CAPACITOR 6.3V 22U	1	AG-DS850HP
C3034,35	ECEV0JV470	E.CAPACITOR 6.3V 47U	2	AG-DS850HP
C3036	ECUM1H101JCN	C.CAPACITOR CH 50V 100P	1	AG-DS850HP
C3037	ECUM1E104KBN	C.CAPACITOR CH 25V 0.1U	1	AG-DS850HP
C3038	ECUM1H222KBN	C.CAPACITOR CH 50V 2200P	1	AG-DS850HP
C3039	ECUM1H080DCN	C.CAPACITOR CH 50V 80P	1	AG-DS850HP
C3040	ECUM1H103KBN	C.CAPACITOR CH 50V 0.01U	1	AG-DS850HP
C3041	ECEV1HVR47	E.CAPACITOR 50V 0.47U	1	AG-DS850HP
C3042,43	ECUM1H103KBN	C.CAPACITOR CH 50V 0.01U	2	
C3044	ECEV0JV470	E.CAPACITOR 6.3V 47U	1	AG-DS850HP
C3045-47	ECUM1H103KBN	C.CAPACITOR CH 50V 0.01U	3	
C3048	ECUM1H330JCN	C.CAPACITOR CH 50V 33P	1	
C3049	ECUM1H181JCN	C.CAPACITOR CH 50V 180P	1	
C3050	ECUM1H103KBN	C.CAPACITOR CH 50V 0.01U	1	
C3051	ECUM1H560JCN	C.CAPACITOR CH 50V 56P	1	
C3052	ECEV1HV3R3	E.CAPACITOR 50V 3.3U	1	
C3053,54	ECUM1H103KBN	C.CAPACITOR CH 50V 0.01U	2	
C3055	ECUM1H101JCN	C.CAPACITOR CH 50V 100P	1	
C3056	ECUM1H180JCN	C.CAPACITOR CH 50V 18P	1	
C3057	ECUM1H680JCN	C.CAPACITOR CH 50V 68P	1	
C3058	ECUM1H220JCN	C.CAPACITOR CH 50V 22P	1	
C3059	ECEV0JV470	E.CAPACITOR 6.3V 47U	1	
C3060-62	ECUM1H103KBN	C.CAPACITOR CH 50V 0.01U	3	
C3063	ECUM1H680JCN	C.CAPACITOR CH 50V 68P	1	
C3064,65	ECUM1H103KBN	C.CAPACITOR CH 50V 0.01U	2	
C3069	ECUM1H223KBN	C.CAPACITOR CH 50V 0.022U	1	
C3070	ECUM1H330JCN	C.CAPACITOR CH 50V 33P	1	
C3071	ECEV0JV470	E.CAPACITOR 6.3V 47U	1	
C3072-75	ECUM1H103KBN	C.CAPACITOR CH 50V 0.01U	4	
C3076	ECEV0JV470	E.CAPACITOR 6.3V 47U	1	
C3078	ECUM1H103KBN	C.CAPACITOR CH 50V 0.01U	1	
C3081	ECEV1HV3R3	E.CAPACITOR 50V 3.3U	1	AG-DS850HP
C3085	ECUM1E104KBN	C.CAPACITOR CH 25V 0.1U	1	
C3088	ECUM1H070DCN	C.CAPACITOR CH 50V 7P	1	
C3089	ECUM1H100DCN	C.CAPACITOR CH 50V 10P	1	
C3090	ECUM1E104ZFN	C.CAPACITOR CH 25V 0.1U	1	AG-DS850HP

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
C3092-95	ECUM1H103KBN	C.CAPACITOR CH 50V 0.01U	4	AG-DS850HP
C3096	ECUM1E104KBN	C.CAPACITOR CH 25V 0.1U	1	AG-DS850HP
C3098,99	ECUM1E104ZFN	C.CAPACITOR CH 25V 0.1U	2	AG-DS850HP
C3100	ECUM1H121JCN	C.CAPACITOR CH 50V 120P	1	AG-DS850HP
C3101	ECUM1H180JCN	C.CAPACITOR CH 50V 18P	1	AG-DS850HP
C3102	ECUM1H332KBN	C.CAPACITOR CH 50V 3300P	1	AG-DS850HP
C3103	ECUM1H070DCN	C.CAPACITOR CH 50V 7P	1	AG-DS850HP
C3104	ECUM1H820JCN	C.CAPACITOR CH 50V 82P	1	AG-DS850HP
C3106	ECEV0JV220	E.CAPACITOR 6.3V 22U	1	AG-DS850HP
C3107	ECEV1HV010	E.CAPACITOR 50V 1U	1	AG-DS850HP
C3108,09	ECEV1HV3R3	E.CAPACITOR 50V 3.3U	2	AG-DS850HP
C3110-12	ECEV0JV470	E.CAPACITOR 6.3V 47U	3	AG-DS850HP
C3113	ECUM1H101JCN	C.CAPACITOR CH 50V 100P	1	AG-DS850HP
C3114	ECUM1E104ZFN	C.CAPACITOR CH 25V 0.1U	1	AG-DS850HP
C3118	ECEV1HV010	E.CAPACITOR 50V 1U	1	AG-DS850HP
C3119	ECUM1H123KBN	C.CAPACITOR CH 50V 0.012U	1	AG-DS850HP
C3120	ECUM1H181JCN	C.CAPACITOR CH 50V 180P	1	AG-DS850HP
C3126	ECUM1H330JCN	C.CAPACITOR CH 50V 33P	1	AG-DS850HP
C3127,28	ECUM1H080DCN	C.CAPACITOR CH 50V 80P	2	AG-DS850HP
C3130	ECUM1E104ZFN	C.CAPACITOR CH 25V 0.1U	1	
C3132	ECUM1E104ZFN	C.CAPACITOR CH 25V 0.1U	1	
C3190,91	ECUM1H103KBN	C.CAPACITOR CH 50V 0.01U	2	
C3201	ECUM1E104ZFN	C.CAPACITOR CH 25V 0.1U	1	
C3203	ECQV1H104JZ	P.CAPACITOR 50V 0.1U	1	
C3204	ECEV0JV470	E.CAPACITOR 6.3V 47U	1	
C3205,06	ECUM1H103KBN	C.CAPACITOR CH 50V 0.01U	2	
C3207	ECQV1H823JZ	P.CAPACITOR 50V 0.082U	1	
C3209,10	ECEV0JV470	E.CAPACITOR 6.3V 47U	2	
C3211	ECEV1HV3R3	E.CAPACITOR 50V 3.3U	1	
C3212	ECUM1H121JCN	C.CAPACITOR CH 50V 120P	1	
C3213	ECEV0JV470	E.CAPACITOR 6.3V 47U	1	
C3214	ECUM1E104ZFN	C.CAPACITOR CH 25V 0.1U	1	
C3215,16	ECUM1H103KBN	C.CAPACITOR CH 50V 0.01U	2	
C3217	ECUM1E104ZFN	C.CAPACITOR CH 25V 0.1U	1	
C3219	ECQV1H394JZ	P.CAPACITOR 50V 0.39U	1	
C3220	ECEV0JV470	E.CAPACITOR 6.3V 47U	1	
C3221,22	ECUM1H103KBN	C.CAPACITOR CH 50V 0.01U	2	
C3223	ECEV1EV4R7	E.CAPACITOR 25V 4.7U	1	
C3224	ECUM1H103KBN	C.CAPACITOR CH 50V 0.01U	1	
C3225	ECEV1EV4R7	E.CAPACITOR 25V 4.7U	1	
C3226-29	ECUM1H103KBN	C.CAPACITOR CH 50V 0.01U	4	
C3230	ECEV1CV100	E.CAPACITOR 16V 10U	1	
C3231,32	ECUM1H103KBN	C.CAPACITOR CH 50V 0.01U	2	
C3233	ECEV1CV100	E.CAPACITOR 16V 10U	1	
C3234,35	ECUM1E104ZFN	C.CAPACITOR CH 25V 0.1U	2	
C3236	ECUM1H103KBN	C.CAPACITOR CH 50V 0.01U	1	
C3237	ECEV0JV470	E.CAPACITOR 6.3V 47U	1	
C3238	ECUM1H680JCN	C.CAPACITOR CH 50V 68P	1	
C3239	ECUM1H181JCN	C.CAPACITOR CH 50V 180P	1	
C3251	ECUM1H103KBN	C.CAPACITOR CH 50V 0.01U	1	
C3252	ECEV0JV470	E.CAPACITOR 6.3V 47U	1	
C3253	ECUM1H103KBN	C.CAPACITOR CH 50V 0.01U	1	
C3254	ECEV0JV470	E.CAPACITOR 6.3V 47U	1	
C3255	ECUM1H101JCN	C.CAPACITOR CH 50V 100P	1	
C3256	ECUM1H271JCN	C.CAPACITOR CH 50V 270P	1	
C3257	ECEV0JV470	E.CAPACITOR 6.3V 47U	1	
C3258	ECQV1H104JZ	P.CAPACITOR 50V 0.1U	1	
C3259	ECUM1E473KBN	C.CAPACITOR CH 25V 0.047U	1	
C3260	ECUM1H561JCN	C.CAPACITOR CH 50V 560P	1	
C3261	ECUM1H103KBN	C.CAPACITOR CH 50V 0.01U	1	
C3262	ECEV1CV470Q	E.CAPACITOR CH 16V 47U	1	
C3266	ECEV0JV470	E.CAPACITOR 6.3V 47U	1	
C3267,68	ECUM1H103KBN	C.CAPACITOR CH 50V 0.01U	2	
C3269	ECUM1H104ZFN	C.CAPACITOR 50V 0.1U	1	
C3270	ECUM1H821JCN	C.CAPACITOR CH 50V 820P	1	
C3271	ECQV1H154JZ	P.CAPACITOR 50V 0.15U	1	AG-DS850HP
C3272	ECUM1E104ZFN	C.CAPACITOR CH 25V 0.1U	1	
C3273	ECUM1H103KBN	C.CAPACITOR CH 50V 0.01U	1	
C3274	ECUM1H101JCN	C.CAPACITOR CH 50V 100P	1	
C3275	ECUM1H390JCN	C.CAPACITOR CH 50V 39P	1	
C3276	ECUM1H181JCN	C.CAPACITOR CH 50V 180P	1	
C3277	ECUM1H104ZFN	C.CAPACITOR 50V 0.1U	1	
C3279	ECUM1H102JCN	C.CAPACITOR CH 50V 1000P	1	AG-DS850HP
C3280	ECUM1H680JCN	C.CAPACITOR CH 50V 68P	1	
C3301	ECUM1H101JCN	C.CAPACITOR CH 50V 100P	1	AG-DS850HP

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
C3302	ECUM1H103KBN	C.CAPACITOR CH 50V 0.01U	1	
C3303	ECEV0JV470	E.CAPACITOR 6.3V 47U	1	
C3304,05	ECUM1H103KBN	C.CAPACITOR CH 50V 0.01U	2	
C3306	ECEV1CV100	E.CAPACITOR 16V 10U	1	
C3307	ECUM1H151JCN	C.CAPACITOR CH 50V 150P	1	AG-DS850HP
C3308	ECUM1H121JCN	C.CAPACITOR CH 50V 120P	1	AG-DS850HP
C3309	ECUM1E104ZFN	C.CAPACITOR CH 25V 0.1U	1	AG-DS850HP
C3310	ECUM1H103KBN	C.CAPACITOR CH 50V 0.01U	1	AG-DS850HP
C3311	ECEV1CV470Q	E.CAPACITOR CH 16V 47U	1	
C3312	ECEV0JV470	E.CAPACITOR 6.3V 47U	1	
C3313	ECEV1CV100	E.CAPACITOR 16V 10U	1	
C3314	ECUM1H103KBN	C.CAPACITOR CH 50V 0.01U	1	
C3315,16	ECEV0JV470	E.CAPACITOR 6.3V 47U	2	
C3317	ECEV1HV010	E.CAPACITOR 50V 1U	1	
C3318	ECUM1E104ZFN	C.CAPACITOR CH 25V 0.1U	1	
C3319	ECEV1EV4R7	E.CAPACITOR 25V 4.7U	1	
C3320	ECQV1H154JZ	P.CAPACITOR 50V 0.15U	1	
C3321	ECUM1H471JCN	C.CAPACITOR CH 50V 470P	1	
C3322	ECUM1H561JCN	C.CAPACITOR CH 50V 560P	1	
C3323	ECQV1H334JZ	P.CAPACITOR 50V 0.33U	1	
C3324	ECEV0JV470	E.CAPACITOR 6.3V 47U	1	
C3325	ECUM1H103KBN	C.CAPACITOR CH 50V 0.01U	1	
C3326	ECUM1H561JCN	C.CAPACITOR CH 50V 560P	1	
C3327	ECEV0JV330	E.CAPACITOR 6.3V 33U	1	
C3328	ECHU1C392GB	P.CAPACITOR 16V 3900P	1	
C3329	ECUM1H152KBN	C.CAPACITOR CH 50V 1500P	1	
C3330	ECEV1HVR47	E.CAPACITOR 50V 0.47U	1	
C3331	ECUM1H331JCN	C.CAPACITOR CH 50V 330P	1	AG-DS850HP
C3332	ECEV0JV470	E.CAPACITOR 6.3V 47U	1	AG-DS850HP
C3333	ECUM1H103KBN	C.CAPACITOR CH 50V 0.01U	1	AG-DS850HP
C3334,35	ECUM1E104ZFN	C.CAPACITOR CH 25V 0.1U	2	AG-DS850HP
C3337	ECEV0JV470	E.CAPACITOR 6.3V 47U	1	AG-DS850HP
C3338	ECUM1H103KBN	C.CAPACITOR CH 50V 0.01U	1	AG-DS850HP
C3339	ECUM1E104ZFN	C.CAPACITOR CH 25V 0.1U	1	AG-DS850HP
C3340	ECUM1H271JCN	C.CAPACITOR CH 50V 270P	1	AG-DS850HP
C3341	ECEV1HV3R3	E.CAPACITOR 50V 3.3U	1	AG-DS850HP
C3342	ECUM1E104ZFN	C.CAPACITOR CH 25V 0.1U	1	AG-DS850HP
C3343	ECUM1H221JCN	C.CAPACITOR CH 50V 220P	1	
C3344	ECUM1H562KBN	C.CAPACITOR CH 50V 5600P	1	
C3345	ECEV0JV470	E.CAPACITOR 6.3V 47U	1	
C3346,47	ECUM1H103KBN	C.CAPACITOR CH 50V 0.01U	2	
C3348	ECQV1H683JZ	P.CAPACITOR 50V 0.068U	1	AG-DS850HP
C3349	ECUM1H220JCN	C.CAPACITOR CH 50V 22P	1	AG-DS850HP
C3350	ECUM1H271JCN	C.CAPACITOR CH 50V 270P	1	AG-DS850HP
C3351	ECUM1H471JCN	C.CAPACITOR CH 50V 470P	1	AG-DS850HP
C3352	ECUM1H120JCN	C.CAPACITOR CH 50V 12P	1	AG-DS850HP
C3353	ECUM1H103KBN	C.CAPACITOR CH 50V 0.01U	1	AG-DS850HP
C3354	ECEV0JV470	E.CAPACITOR 6.3V 47U	1	AG-DS850HP
C3355	ECUM1H103KBN	C.CAPACITOR CH 50V 0.01U	1	AG-DS850HP
C3356	ECUM1H150JCN	C.CAPACITOR CH 50V 15P	1	AG-DS850HP
C3357	ECUM1H271JCN	C.CAPACITOR CH 50V 270P	1	AG-DS850HP
C3358	ECUM1H820JCN	C.CAPACITOR CH 50V 82P	1	AG-DS850HP
C3359	ECUM1H181JCN	C.CAPACITOR CH 50V 180P	1	AG-DS850HP
C3360-63	ECUM1H103KBN	C.CAPACITOR CH 50V 0.01U	4	AG-DS850HP
C3372	ECEV1CV470Q	E.CAPACITOR CH 16V 47U	1	
C3373	ECUM1E104ZFN	C.CAPACITOR CH 25V 0.1U	1	AG-DS850HP
C3374,75	ECUM1H103KBN	C.CAPACITOR CH 50V 0.01U	2	AG-DS850HP
C3376	ECEV1CV100	E.CAPACITOR 16V 10U	1	
C3377	ECUM1H103KBN	C.CAPACITOR CH 50V 0.01U	1	
C3378	ECEV1CV100	E.CAPACITOR 16V 10U	1	
C3379	ECUM1H103KBN	C.CAPACITOR CH 50V 0.01U	1	
C3382	ECUM1H103KBN	C.CAPACITOR CH 50V 0.01U	1	AG-DS850HP
C3385,86	ECUM1H080DCN	C.CAPACITOR CH 50V 80P	2	AG-DS850HP
C3387	ECUM1H330JCN	C.CAPACITOR CH 50V 33P	1	AG-DS850HP
C3388,89	ECEV0JV220	E.CAPACITOR 6.3V 22U	2	
C3390	ECUM1H470JCN	C.CAPACITOR CH 50V 47P	1	
C3391	ECUM1H471JCN	C.CAPACITOR CH 50V 470P	1	
C3392	ECUM1H103KBN	C.CAPACITOR CH 50V 0.01U	1	
C3393	ECUM1H102JCN	C.CAPACITOR CH 50V 1000P	1	
C3394	ECEV1CN100Q	E.CAPACITOR CH 16V 10U	1	
C3395	ECUM1E104ZFN	C.CAPACITOR CH 25V 0.1U	1	AG-DS850HP
C3396	ECEA0JKA101	E.CAPACITOR 6.3V 100U	1	
C3431-34	ECEV0JV470	E.CAPACITOR 6.3V 47U	4	
C3436	ECUM1H270JCN	C.CAPACITOR CH 50V 27P	1	
C3437	ECUM1H103ZFN	C.CAPACITOR 50V 0.01U	1	

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
C3438	ECEV0GV221	E.CAPACITOR 4V 220U	1	
C3439	ECUM1H103ZFN	C.CAPACITOR 50V 0.01U	1	
C3440	ECEV1CV470Q	E.CAPACITOR CH 16V 47U	1	
C3441	ECUM1C224KBM	C.CAPACITOR CH 16V 0.22U	1	
C3442	ECUM1E104ZFN	C.CAPACITOR CH 25V 0.1U	1	
C3443	ECUM1E823KBM	C.CAPACITOR CH 25V 0.082U	1	
C3444	ECUM1C224KBM	C.CAPACITOR CH 16V 0.22U	1	
C3445	ECUM1H103ZFN	C.CAPACITOR 50V 0.01U	1	
C3446,47	ECEV1CV470Q	E.CAPACITOR CH 16V 47U	2	
C3448	ECUM1E104ZFN	C.CAPACITOR CH 25V 0.1U	1	
C3449	ECUM1C224KBM	C.CAPACITOR CH 16V 0.22U	1	
C3450	ECUM1H221JCN	C.CAPACITOR CH 50V 220P	1	
C3451	ECUM1C224KBM	C.CAPACITOR CH 16V 0.22U	1	
C3452	ECUM1H103ZFN	C.CAPACITOR 50V 0.01U	1	
C3453	ECUM1C224KBM	C.CAPACITOR CH 16V 0.22U	1	
C3454	ECUM1H103ZFN	C.CAPACITOR 50V 0.01U	1	
C3455	ECUM1H101JCN	C.CAPACITOR CH 50V 100P	1	
C3456,57	ECUM1C224KBM	C.CAPACITOR CH 16V 0.22U	2	
C3459	ECUM1H390JCN	C.CAPACITOR CH 50V 39P	1	
C3460	ECUM1H332KBN	C.CAPACITOR CH 50V 3300P	1	
C3461	ECEV0GV221	E.CAPACITOR 4V 220U	1	
D3001	MA151K	DIODE	1	<R>AG-DS850HP
D3003	MA151K	DIODE	1	<R>AG-DS850HP
D3004	MA151K	DIODE	1	<R>
D3006	MA151K	DIODE	1	<R>AG-DS850HP
D3007	MA151K	DIODE	1	<R>
D3009	MA151K	DIODE	1	<R>
D3010,11	MA151K	DIODE	2	<R>AG-DS850HP
D3012	MA151WK	DIODE	1	<R>
D3201	MA157	DIODE	1	<R>
D3204-06	MA151K	DIODE	3	<R>
D3208,09	MA151K	DIODE	2	<R>
D3301	MA151K	DIODE	1	<R>AG-DS850HP
D3302	MA151WA	DIODE	1	<R>
D3303,04	MA151K	DIODE	2	<R>
D3305	MA704	DIODE	1	<R>
D3431,32	1SS283	DIODE	2	<R>
DL3301	VLD0265	DELAY LINE	1	
FL3001	VLF1049	FILTER	1	AG-DS850HP
FL3002	VLF1048	FILTER	1	AG-DS850HP
FL3003	VLF1015	FILTER	1	AG-DS850HP
FL3201	VLF1050	FILTER	1	
FL3202	VLF1047	FILTER	1	
FL3203	VLF1055	FILTER	1	
FL3204	VLF1045	FILTER	1	
FL3205	VLF1051	FILTER	1	
FL3302	ELB4H068	FILTER	1	
IC3001	AN3916	IC	1	<R>AG-DS850HP
IC3002	AN6366NS	IC	1	<R>AG-DS850HP
IC3003	MC74HC4053F	IC	1	<R>
IC3004	NJM2233BMA	IC	1	<R>
IC3005	MN4528BS	IC	1	<R>AG-DS850HP
IC3006	MC74HC86F	IC	1	<R>
IC3007	M52083FP	IC	1	<R>
IC3008	LM324NS	IC	1	<R>
IC3009	MC14052BF	IC	1	<R>
IC3010	NJM2234MA	IC	1	<R>AG-DS850HP
IC3011	NJM78L05UA	IC	1	<R>AG-DS850HP
IC3012	NJM082BM	IC	1	<R>AG-DS850HP
IC3013	MC14577CF	IC	1	<R>AG-DS850HP
IC3014	TC74HC221AF	IC	1	<R>AG-DS850HP
IC3015	AN3916	IC	1	<R>AG-DS850HP
IC3017	TC7S08F	IC	1	<R>

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
IC3020	NJM78L05UA	IC	1	<R>
IC3153	SN74LS123NS	IC	1	<R>AG-DS850HP
IC3201	AN2352S	IC	1	<R>
IC3202	AN3396	IC	1	<R>
IC3203	LM358PS	IC	1	<R>
IC3204	AN3940SC	IC	1	<R>
IC3206	TA7357P	IC	1	<R>
IC3207	SN74LS221NS	IC	1	<R>
IC3208	TC7S04F	IC	1	<R>
IC3209	NJM2233BMA	IC	1	<R>
IC3210	TC4S30F	IC	1	<R>
IC3301	TC7S04F	IC	1	<R>AG-DS850HP
IC3302	MC14066BF	IC	1	<R>
IC3303	LM324NS	IC	1	<R>
IC3304	NJM2233BMA	IC	1	<R>
IC3305	AN3296S	IC	1	<R>
IC3306	NJM2234MA	IC	1	<R>AG-DS850HP
IC3307	MN4528BS	IC	1	<R>
IC3308	AN6308S	IC	1	<R>AG-DS850HP
IC3309	MC14577CF	IC	1	<R>
IC3310	AN6308S	IC	1	<R>AG-DS850HP
IC3311	TC4S30F	IC	1	<R>
IC3312	TC7S32F	IC	1	<R>
IC3431	MC14577CF	IC	1	<R>
IC3432	NJM592M8	IC	1	<R>
L3002,03	VLQ0319K101	COIL 100UH	2	AG-DS850HP
L3004-07	VLQ0319K101	COIL 100UH	4	
L3008,09	VLQ0319K101	COIL 100UH	2	AG-DS850HP
L3010	VLQ0163J221	COIL 220UH	1	AG-DS850HP
L3011	VLQ0163J390	COIL 39UH	1	
L3012	VLQ0133J391	COIL	1	
L3013	VLQ0163J330	COIL 33UH	1	
L3014	VLQ0319K101	COIL 100UH	1	
L3015	VLQ0163J100	COIL 10UH	1	
L3016	VLQ0163J220	COIL 22UH	1	
L3017	VLQ0163J180	COIL	1	
L3018	VLQ0163J220	COIL 22UH	1	
L3020	VLQ0163J330	COIL 33UH	1	
L3021,22	VLQ0319K101	COIL 100UH	2	
L3025	VLQ0163J330	COIL 33UH	1	
L3028	VLQ0163J180	COIL	1	AG-DS850HP
L3029	VLQ0163J220	COIL 22UH	1	AG-DS850HP
L3201,02	VLQ0319K101	COIL 100UH	2	
L3203	VLQ0133J561	COIL	1	
L3204	VLQ0163J151	COIL 150UH	1	
L3205,06	VLQ0319K101	COIL 100UH	2	
L3207	VLQ0133J102	COIL	1	
L3208	VLQ0163J330	COIL 33UH	1	
L3209,10	VLQ0319K101	COIL 100UH	2	
L3213,14	VLQ0319K101	COIL 100UH	2	
L3215	VLQ0133J271	COIL	1	
L3218	VLQ0319K101	COIL 100UH	1	
L3220	VLQ0133J821	COIL	1	
L3221	VLQ0133J331	COIL	1	AG-DS850HP
L3222,23	VLQ0133J391	COIL	2	
L3224	VLQ0163J330	COIL 33UH	1	
L3301	VLQ0163J221	COIL 220UH	1	AG-DS850HP
L3302-05	VLQ0319K101	COIL 100UH	4	
L3306,07	VLQ0319K101	COIL 100UH	2	AG-DS850HP
L3309	VLQ0163J221	COIL 220UH	1	
L3310	VLQ0319K101	COIL 100UH	1	
L3311	VLQ0319K101	COIL 100UH	1	AG-DS850HP
L3312	VLQ0163J151	COIL 150UH	1	AG-DS850HP
L3313	VLQ0163J4R7	COIL	1	AG-DS850HP
L3314	VLQ0163J151	COIL 150UH	1	AG-DS850HP
L3315	VLQ0163J221	COIL 220UH	1	AG-DS850HP
L3316	VLQ0163J390	COIL 39UH	1	AG-DS850HP
L3317	VLQ0163J330	COIL 33UH	1	AG-DS850HP
L3318	VLQ0163J820	COIL 82UH	1	AG-DS850HP
L3319	VLQ0133J271	COIL	1	AG-DS850HP
L3320	VLQ0163J6R8	COIL 6.8UH	1	AG-DS850HP
L3325	VLQ0319K101	COIL 100UH	1	

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
L3327	VLQ0163J220	COIL 22UH	1	AG-DS850HP
L3328	VLQ0163J180	COIL	1	AG-DS850HP
L3431	VLQ0133J471	COIL 470UH	1	
L3432	VLQ0319K220	COIL 22UH	1	
L3433	VLQ0163J221	COIL 220UH	1	
L3435	VLQ0163J3R3	COIL 3.3UH	1	
P931	VJP3176B100	CONNECTOR	1	
P3002	VJP3080	CONNECTOR (MALE)	1	
Q3001	XN4601	TRANSISTOR-TRANSISTOR	1	<R>AG-DS850HP
Q3004	XN4501	TRANSISTOR-RESISTOR	1	<R>AG-DS850HP
Q3005	MSC2295-B	TRANSISTOR	1	<R>AG-DS850HP
Q3007	2SA1022-B	TRANSISTOR	1	<R>AG-DS850HP
Q3008	MSB709-R	TRANSISTOR	1	<R>AG-DS850HP
Q3009,10	XN4501	TRANSISTOR-RESISTOR	2	<R>AG-DS850HP
Q3011	MSB709-R	TRANSISTOR	1	<R>
Q3012	MSD601-R	TRANSISTOR	1	<R>AG-DS850HP
Q3013	XN4401	TRANSISTOR-RESISTOR	1	<R>
Q3017	2SD1328	TRANSISTOR	1	<R>
Q3018	2SK198-R	TRANSISTOR	1	<R>AG-DS850HP
Q3019	MSD601-R	TRANSISTOR	1	<R>AG-DS850HP
Q3020	2SB643	TRANSISTOR	1	<R>AG-DS850HP
Q3021	MSD601-R	TRANSISTOR	1	<R>AG-DS850HP
Q3022	MSB709-R	TRANSISTOR	1	<R>AG-DS850HP
Q3024	MSD601-R	TRANSISTOR	1	<R>AG-DS850HP
Q3025-27	MSC2295-B	TRANSISTOR	3	<R>
Q3030	MSC2295-B	TRANSISTOR	1	<R>
Q3031	2SK374-R	TRANSISTOR	1	<R>
Q3032	MSB709-R	TRANSISTOR	1	<R>
Q3033	MSD601-R	TRANSISTOR	1	<R>
Q3034	MSD601-R	TRANSISTOR	1	<R>AG-DS850HP
Q3040	MSD601-R	TRANSISTOR	1	<R>AG-DS850HP
Q3201	MSC2295-B	TRANSISTOR	1	<R>
Q3202	MSD601-R	TRANSISTOR	1	<R>
Q3203	MSC2295-B	TRANSISTOR	1	<R>
Q3204-07	MSD601-R	TRANSISTOR	4	<R>
Q3208	MSC2295-B	TRANSISTOR	1	<R>
Q3209	MSD601-R	TRANSISTOR	1	<R>
Q3210	MRN1402	TRANSISTOR	1	<R>
Q3211	MSC2295-B	TRANSISTOR	1	<R>
Q3212,13	MSD601-R	TRANSISTOR	2	<R>
Q3215	MSC2295-B	TRANSISTOR	1	<R>
Q3221-24	MSD601-R	TRANSISTOR	4	<R>
Q3225	MSC2295-B	TRANSISTOR	1	<R>
Q3228	XN1213	TRANSISTOR-TRANSISTOR	1	<R>
Q3230	MSC2295-B	TRANSISTOR	1	<R>
Q3231-33	MSB709-R	TRANSISTOR	3	<R>
Q3234	MSD601-R	TRANSISTOR	1	<R>
Q3235	XN1213	TRANSISTOR-TRANSISTOR	1	<R>
Q3236	XN1504	TRANSISTOR	1	<R>
Q3237	MSB709-R	TRANSISTOR	1	<R>
Q3301	MSB709-R	TRANSISTOR	1	<R>AG-DS850HP
Q3302	MSD601-R	TRANSISTOR	1	<R>AG-DS850HP
Q3306	MSB709-R	TRANSISTOR	1	<R>AG-DS850HP
Q3307-09	MSD601-R	TRANSISTOR	3	<R>
Q3310	MSD601-R	TRANSISTOR	1	<R>AG-DS850HP
Q3311	MSD601-R	TRANSISTOR	1	<R>
Q3312	MSD601-R	TRANSISTOR	1	<R>AG-DS850HP
Q3313,14	MSD601-R	TRANSISTOR	2	<R>
Q3315	MSC2295-B	TRANSISTOR	1	<R>AG-DS850HP
Q3316-18	MSD601-R	TRANSISTOR	3	<R>AG-DS850HP
Q3319	MSB709-R	TRANSISTOR	1	<R>AG-DS850HP
Q3320	MSC2295-B	TRANSISTOR	1	<R>AG-DS850HP
Q3321	MSD601-R	TRANSISTOR	1	<R>AG-DS850HP
Q3431-33	MSD601-R	TRANSISTOR	3	<R>
Q3434,35	MSC2295-B	TRANSISTOR	2	<R>
Q3436	XN1504	TRANSISTOR	1	<R>
Q3437	MSC2295-B	TRANSISTOR	1	<R>
Q3438	MSD601-R	TRANSISTOR	1	<R>

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
QR3002	MRN1404	TRANSISTOR	1	<R>
QR3003	MRN2404	TRANSISTOR	1	<R>
QR3005	MRN1404	TRANSISTOR	1	<R>
QR3006	MRN2404	TRANSISTOR	1	<R>AG-DS850HP
QR3007	MRN1404	TRANSISTOR	1	<R>AG-DS850HP
QR3009	DTC363EK	TRANSISTOR-RESISTOR	1	<R>AG-DS850HP
QR3010	MRN1404	TRANSISTOR	1	<R>AG-DS850HP
QR3011-13	MRN2404	TRANSISTOR	3	<R>
QR3014,15	MRN1404	TRANSISTOR	2	<R>
QR3016	MRN1403	TRANSISTOR	1	<R>
QR3018	MSD601-R	TRANSISTOR	1	<R>AG-DS850HP
QR3201	MRN2404	TRANSISTOR	1	<R>AG-DS850HP
QR3204-06	MRN1404	TRANSISTOR	3	<R>
QR3209	MRN2404	TRANSISTOR	1	<R>
QR3212	MRN1404	TRANSISTOR	1	<R>
QR3213	MRN2404	TRANSISTOR	1	<R>
QR3214	MRN1404	TRANSISTOR	1	<R>
QR3301	MRN1404	TRANSISTOR	1	<R>
R3001	ERJ6GEYJ122	M.RESISTOR CH 1/10W 1.2K	1	AG-DS850HP
R3002	ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	1	AG-DS850HP
R3004	ERJ6GEYJ101	M.RESISTOR CH 1/10W 100	1	AG-DS850HP
R3005	ERJ6GEYJ332	M.RESISTOR CH 1/10W 3.3K	1	AG-DS850HP
R3006	ERJ6GEYJ682	M.RESISTOR CH 1/10W 6.8K	1	AG-DS850HP
R3007	ERJ6GEYJ152	M.RESISTOR CH 1/10W 1.5K	1	
R3008	ERJ6GEYJ562	M.RESISTOR CH 1/10W 5.6K	1	AG-DS850HP
R3009	ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	1	AG-DS850HP
R3010	ERJ6GEYG822	M.RESISTOR CH 1/10W 8.2K	1	AG-DS850HP
R3011	ERJ6GEYJ222	M.RESISTOR CH 1/10W 2.2K	1	AG-DS850HP
R3012	ERJ6GEYG472	M.RESISTOR CH 1/10W 4.7K	1	AG-DS850HP
R3013	ERJ6GEYJ751	M.RESISTOR CH 1/10W 750	1	AG-DS850HP
R3014	ERJ6GEYJ332	M.RESISTOR CH 1/10W 3.3K	1	AG-DS850HP
R3015	ERJ6GEYJ822	M.RESISTOR CH 1/10W 8.2K	1	AG-DS850HP
R3016	ERJ6GEYJ102	M.RESISTOR CH 1/10W 1K	1	AG-DS850HP
R3017	ERJ6GEYJ822	M.RESISTOR CH 1/10W 8.2K	1	AG-DS850HP
R3019	ERJ6GEYJ221	M.RESISTOR CH 1/10W 220	1	AG-DS850HP
R3020	ERJ6GEYJ102	M.RESISTOR CH 1/10W 1K	1	
R3021	ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	1	AG-DS850HP
R3022	ERJ6GEYJ471	M.RESISTOR CH 1/10W 470	1	AG-DS850HP
R3023	ERJ6GEYJ102	M.RESISTOR CH 1/10W 1K	1	AG-DS850HP
R3024	ERJ6GEYJ471	M.RESISTOR CH 1/10W 470	1	AG-DS850HP
R3025	ERJ6GEYJ152	M.RESISTOR CH 1/10W 1.5K	1	AG-DS850HP
R3026	ERJ6GEYG162	M.RESISTOR CH 1/10W 1.6K	1	AG-DS850HP
R3027	ERJ6GEYG471	M.RESISTOR CH 1/10W 470	1	AG-DS850HP
R3029	ERJ6GEYJ332	M.RESISTOR CH 1/10W 3.3K	1	AG-DS850HP
R3030	ERJ6GEYJ222	M.RESISTOR CH 1/10W 2.2K	1	AG-DS850HP
R3031	ERJ6GEYJ122	M.RESISTOR CH 1/10W 1.2K	1	AG-DS850HP
R3032	ERJ6GEYJ102	M.RESISTOR CH 1/10W 1K	1	AG-DS850HP
R3033	ERJ6GEYJ474	M.RESISTOR CH 1/10W 470K	1	AG-DS850HP
R3034	ERJ6GEYJ332	M.RESISTOR CH 1/10W 3.3K	1	AG-DS850HP
R3035	ERJ6GEY0R00	M.RESISTOR CH 1/10W 0	1	AG-DS850HP
R3036	ERJ6GEYJ473	M.RESISTOR CH 1/10W 47K	1	AG-DS850HP
R3037	ERJ6GEYJ332	M.RESISTOR CH 1/10W 3.3K	1	
R3038	ERJ6GEYJ102	M.RESISTOR CH 1/10W 1K	1	
R3039	ERJ6GEYJ473	M.RESISTOR CH 1/10W 47K	1	
R3040	ERJ6GEYJ222	M.RESISTOR CH 1/10W 2.2K	1	AG-DS850HP
R3041	ERJ6GEYJ102	M.RESISTOR CH 1/10W 1K	1	AG-DS850HP
R3042	ERJ6GEYJ152	M.RESISTOR CH 1/10W 1.5K	1	
R3043,44	ERJ6GEYJ102	M.RESISTOR CH 1/10W 1K	2	AG-DS850HP
R3045	ERJ6GEYJ561	M.RESISTOR CH 1/10W 560	1	AG-DS850HP
R3053	ERJ6GEYJ223	M.RESISTOR CH 1/10W 22K	1	
R3054	ERJ6GEYJ332	M.RESISTOR CH 1/10W 3.3K	1	AG-DS850HP
R3055	ERJ6GEYJ470	M.RESISTOR CH 1/10W 47	1	AG-DS850HP
R3056	ERJ6GEYJ102	M.RESISTOR CH 1/10W 1K	1	AG-DS850HP
R3057	ERJ6GEYJ183	M.RESISTOR CH 1/10W 18K	1	AG-DS850HP
R3059	ERJ6GEYJ822	M.RESISTOR CH 1/10W 8.2K	1	AG-DS850HP
R3060	ERJ6GEYJ222	M.RESISTOR CH 1/10W 2.2K	1	AG-DS850HP
R3061	ERJ6GEYJ223	M.RESISTOR CH 1/10W 22K	1	AG-DS850HP
R3062	ERJ6GEYG472	M.RESISTOR CH 1/10W 4.7K	1	AG-DS850HP
R3063	ERJ6GEYG472	M.RESISTOR CH 1/10W 4.7K	1	
R3064	ERJ6GEYJ332	M.RESISTOR CH 1/10W 3.3K	1	AG-DS850HP

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
R3065	ERJ6GEYJ821	M.RESISTOR CH 1/10W 820	1	AG-DS850HP
R3066	ERJ6GEYJ182	M.RESISTOR CH 1/10W 1.8K	1	
R3067	ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	1	
R3068	ERJ6GEYJ223	M.RESISTOR CH 1/10W 22K	1	
R3069	ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	1	
R3070	ERJ6GEY0R00	M.RESISTOR CH 1/10W 0	1	
R3071	ERJ6GEYJ101	M.RESISTOR CH 1/10W 100	1	AG-DS850HP
R3072	ERJ6GEYJ561	M.RESISTOR CH 1/10W 560	1	AG-DS850HP
R3073	ERJ6GEYJ271	M.RESISTOR CH 1/10W 270	1	AG-DS850HP
R3076	ERJ6GEYJ332	M.RESISTOR CH 1/10W 3.3K	1	
R3077	ERJ6GEYJ561	M.RESISTOR CH 1/10W 560	1	
R3078	ERJ6GEYJ104	M.RESISTOR CH 1/10W 100K	1	AG-DS850HP
R3079	ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	1	
R3082	ERJ6GEYJ820	M.RESISTOR CH 1/10W 82	1	
R3085	ERJ6GEYJ102	M.RESISTOR CH 1/10W 1K	1	
R3086	ERJ6GEYJ183	M.RESISTOR CH 1/10W 18K	1	
R3087	ERJ6GEY0R00	M.RESISTOR CH 1/10W 0	1	
R3088	ERJ6GEYJ271	M.RESISTOR CH 1/10W 270	1	
R3089	ERJ6GEYJ561	M.RESISTOR CH 1/10W 560	1	
R3090	ERJ6GEYJ102	M.RESISTOR CH 1/10W 1K	1	
R3092	ERJ6GEYJ102	M.RESISTOR CH 1/10W 1K	1	
R3093	ERJ6GEYJ105	M.RESISTOR CH 1/10W 1M	1	
R3094	ERJ6GEYJ224	M.RESISTOR CH 1/10W 220K	1	
R3095	ERJ6GEYJ272	M.RESISTOR CH 1/10W 2.7K	1	
R3096	ERJ6GEY0R00	M.RESISTOR CH 1/10W 0	1	
R3097	ERJ6GEYJ393	M.RESISTOR CH 1/10W 39K	1	
R3098	ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	1	
R3099	ERJ6GEYJ473	M.RESISTOR CH 1/10W 47K	1	
R3100	ERJ6GEYJ563	M.RESISTOR CH 1/10W 56K	1	
R3103	ERJ6GEYJ681	M.RESISTOR CH 1/10W 680	1	
R3104	ERJ6GEYJ102	M.RESISTOR CH 1/10W 1K	1	
R3105	ERJ6GEYJ561	M.RESISTOR CH 1/10W 560	1	
R3106	VRE0034E102	M.RESISTOR CH 1/10W 1K	1	
R3107	ERJ6GEYJ561	M.RESISTOR CH 1/10W 560	1	
R3109	ERJ6GEYJ102	M.RESISTOR CH 1/10W 1K	1	
R3110	ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	1	
R3112,13	ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	2	
R3114	ERJ6GEYG472	M.RESISTOR CH 1/10W 4.7K	1	
R3115	ERJ6GEYJ105	M.RESISTOR CH 1/10W 1M	1	
R3116	ERJ6GEYJ681	M.RESISTOR CH 1/10W 680	1	
R3121	ERJ6GEYJ122	M.RESISTOR CH 1/10W 1.2K	1	
R3122	VRE0034E182	M.RESISTOR CH 1/10W 1.8K	1	
R3123	VRE0034E151	M.RESISTOR CH 1/10W 150	1	
R3124	ERJ6GEYJ332	M.RESISTOR CH 1/10W 3.3K	1	
R3125	ERJ6GEYJ750	M.RESISTOR CH 1/10W 75	1	
R3126	ERJ6GEYJ470	M.RESISTOR CH 1/10W 47	1	
R3127	ERJ6GEYJ105	M.RESISTOR CH 1/10W 1M	1	
R3128	ERJ6GEYJ683	M.RESISTOR CH 1/10W 68K	1	
R3129	ERJ6GEYJ392	M.RESISTOR CH 1/10W 3.9K	1	
R3131	ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	1	AG-DS850HP
R3132	ERJ6GEYJ105	M.RESISTOR CH 1/10W 1M	1	AG-DS850HP
R3135	ERJ6GEYJ101	M.RESISTOR CH 1/10W 100	1	AG-DS850HP
R3136,37	ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	2	AG-DS850HP
R3138	ERJ6GEYJ152	M.RESISTOR CH 1/10W 1.5K	1	AG-DS850HP
R3139	ERJ6GEYJ183	M.RESISTOR CH 1/10W 18K	1	AG-DS850HP
R3140	ERJ6GEYJ222	M.RESISTOR CH 1/10W 2.2K	1	AG-DS850HP
R3141	ERJ6GEYJ224	M.RESISTOR CH 1/10W 220K	1	AG-DS850HP
R3142	ERJ6GEYJ272	M.RESISTOR CH 1/10W 2.7K	1	AG-DS850HP
R3143	ERJ6GEYG333	M.RESISTOR CH 1/10W 33K	1	AG-DS850HP
R3144,45	ERJ6GEYJ392	M.RESISTOR CH 1/10W 3.9K	2	AG-DS850HP
R3146	ERJ6GEYJ473	M.RESISTOR CH 1/10W 47K	1	AG-DS850HP
R3147	ERJ6GEYJ562	M.RESISTOR CH 1/10W 5.6K	1	AG-DS850HP
R3148	ERJ6GEYJ682	M.RESISTOR CH 1/10W 6.8K	1	AG-DS850HP
R3149	ERJ6GEYJ821	M.RESISTOR CH 1/10W 820	1	AG-DS850HP
R3150	ERJ6GEYJ223	M.RESISTOR CH 1/10W 22K	1	AG-DS850HP
R3169	ERJ6GEYG472	M.RESISTOR CH 1/10W 4.7K	1	AG-DS850HP
R3170	ERJ6GEYJ561	M.RESISTOR CH 1/10W 560	1	AG-DS850HP
R3178	ERJ6GEYG472	M.RESISTOR CH 1/10W 4.7K	1	
R3180	ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	1	
R3181	ERJ6GEYJ102	M.RESISTOR CH 1/10W 1K	1	
R3182	VRE0034E121	M.RESISTOR CH 1/10W 120	1	
R3183	ERJ6GEYJ561	M.RESISTOR CH 1/10W 560	1	
R3185	ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	1	
R3188	ERJ6GEYJ102	M.RESISTOR CH 1/10W 1K	1	AG-DS850HP
R3189	ERJ6GEYJ821	M.RESISTOR CH 1/10W 820	1	AG-DS850HP

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
R3190	ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	1	
R3192	ERJ6GEYJ102	M.RESISTOR CH 1/10W 1K	1	
R3195	ERJ6GEY0R00	M.RESISTOR CH 1/10W 0	1	AG-DS850HP
R3197	ERJ6GEY0R00	M.RESISTOR CH 1/10W 0	1	AG-DS850HP
R3198	ERJ6GEYJ332	M.RESISTOR CH 1/10W 3.3K	1	AG-DS850HP
R3199	ERJ6GEYJ152	M.RESISTOR CH 1/10W 1.5K	1	AG-DS850HP
R3200,01	ERJ6GEYJ102	M.RESISTOR CH 1/10W 1K	2	
R3202	ERJ6GEYJ223	M.RESISTOR CH 1/10W 22K	1	AG-DS850HP
R3203	ERJ6GEYG333	M.RESISTOR CH 1/10W 33K	1	
R3204	ERJ6GEYJ102	M.RESISTOR CH 1/10W 1K	1	
R3205	ERJ6GEYJ151	M.RESISTOR CH 1/10W 150	1	
R3207	ERJ6GEYJ102	M.RESISTOR CH 1/10W 1K	1	
R3208	ERJ6GEYJ272	M.RESISTOR CH 1/10W 2.7K	1	
R3209	ERJ6GEYJ102	M.RESISTOR CH 1/10W 1K	1	
R3211	ERJ6GEYJ222	M.RESISTOR CH 1/10W 2.2K	1	
R3212	ERJ6GEYJ152	M.RESISTOR CH 1/10W 1.5K	1	
R3213	ERJ6GEYJ223	M.RESISTOR CH 1/10W 22K	1	
R3214	ERJ6GEYJ273	M.RESISTOR CH 1/10W 27K	1	
R3215	ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	1	
R3216	ERJ6GEYJ104	M.RESISTOR CH 1/10W 100K	1	
R3217	ERJ6GEYJ102	M.RESISTOR CH 1/10W 1K	1	
R3218	ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	1	
R3219,20	ERJ6GEYJ223	M.RESISTOR CH 1/10W 22K	2	
R3221	ERJ6GEYJ221	M.RESISTOR CH 1/10W 220	1	
R3222,23	ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	2	
R3224	ERJ6GEYJ102	M.RESISTOR CH 1/10W 1K	1	
R3225	ERJ6GEYJ273	M.RESISTOR CH 1/10W 27K	1	
R3226	ERJ6GEYJ823	M.RESISTOR CH 1/10W 82K	1	
R3227,28	ERJ6GEYJ122	M.RESISTOR CH 1/10W 1.2K	2	
R3229	ERJ6GEYJ102	M.RESISTOR CH 1/10W 1K	1	
R3230	ERJ6GEYJ821	M.RESISTOR CH 1/10W 820	1	
R3231	ERJ6GEYJ273	M.RESISTOR CH 1/10W 27K	1	
R3232	ERJ6GEYJ822	M.RESISTOR CH 1/10W 8.2K	1	
R3233	ERJ6GEYJ102	M.RESISTOR CH 1/10W 1K	1	
R3234	ERJ6GEYJ471	M.RESISTOR CH 1/10W 470	1	
R3235	ERJ6GEYJ222	M.RESISTOR CH 1/10W 2.2K	1	
R3236	ERJ6GEYG333	M.RESISTOR CH 1/10W 33K	1	
R3237	ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	1	
R3238	ERJ6GEYJ102	M.RESISTOR CH 1/10W 1K	1	
R3239	ERJ6GEYJ101	M.RESISTOR CH 1/10W 100	1	
R3240	ERJ6GEYJ223	M.RESISTOR CH 1/10W 22K	1	
R3241	ERJ6GEYG153	M.RESISTOR CH 1/10W 15K	1	
R3242	ERJ6GEYJ223	M.RESISTOR CH 1/10W 22K	1	
R3243	ERJ6GEYJ332	M.RESISTOR CH 1/10W 3.3K	1	
R3244	ERJ6GEYJ102	M.RESISTOR CH 1/10W 1K	1	
R3245	ERJ6GEYJ332	M.RESISTOR CH 1/10W 3.3K	1	
R3255	ERJ6GEYJ471	M.RESISTOR CH 1/10W 470	1	
R3274	ERJ6GEYJ222	M.RESISTOR CH 1/10W 2.2K	1	
R3275	ERJ6GEY0R00	M.RESISTOR CH 1/10W 0	1	
R3276	ERJ6GEYJ152	M.RESISTOR CH 1/10W 1.5K	1	
R3277	ERJ6GEYJ331	M.RESISTOR CH 1/10W 330	1	
R3278	ERJ6GEYJ222	M.RESISTOR CH 1/10W 2.2K	1	
R3279	ERJ6GEYJ102	M.RESISTOR CH 1/10W 1K	1	
R3281	ERJ6GEYJ222	M.RESISTOR CH 1/10W 2.2K	1	
R3282	ERJ6GEYJ124	M.RESISTOR CH 1/10W 120K	1	
R3283	ERJ6GEYJ123	M.RESISTOR CH 1/10W 12K	1	
R3284	ERJ6GEYJ474	M.RESISTOR CH 1/10W 470K	1	
R3292	ERJ6GEYJ471	M.RESISTOR CH 1/10W 470	1	
R3293	VRE0034E682	M.RESISTOR CH 1/10W 6.8K	1	
R3294	ERJ6GEYJ102	M.RESISTOR CH 1/10W 1K	1	
R3298	ERJ6GEY0R00	M.RESISTOR CH 1/10W 0	1	
R3299	ERJ6GEYJ223	M.RESISTOR CH 1/10W 22K	1	
R3300	ERJ6GEYJ221	M.RESISTOR CH 1/10W 220	1	
R3301	ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	1	
R3302	ERJ6GEYJ102	M.RESISTOR CH 1/10W 1K	1	AG-DS850HP
R3303	ERJ6GEYJ222	M.RESISTOR CH 1/10W 2.2K	1	
R3304	ERJ6GEYJ105	M.RESISTOR CH 1/10W 1M	1	
R3305	ERJ6GEYJ101	M.RESISTOR CH 1/10W 100	1	AG-DS850HP
R3306	ERJ6GEYJ221	M.RESISTOR CH 1/10W 220	1	AG-DS850HP
R3307	ERJ6GEYJ102	M.RESISTOR CH 1/10W 1K	1	AG-DS850HP
R3308	ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	1	AG-DS850HP
R3309	ERJ6GEYJ473	M.RESISTOR CH 1/10W 47K	1	
R3310	ERJ6GEYJ105	M.RESISTOR CH 1/10W 1M	1	
R3311	ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	1	
R3312	ERJ6GEYJ473	M.RESISTOR CH 1/10W 47K	1	AG-DS850HP

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
R3313	ERJ6GEYJ102	M.RESISTOR CH 1/10W 1K	1	
R3314	ERJ6GEYJ272	M.RESISTOR CH 1/10W 2.7K	1	
R3315,16	ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	2	
R3317	ERJ6GEYJ182	M.RESISTOR CH 1/10W 1.8K	1	
R3318	ERJ6GEYJ473	M.RESISTOR CH 1/10W 47K	1	
R3319	ERJ6GEYJ221	M.RESISTOR CH 1/10W 220	1	AG-DS850HP
R3320	ERJ6GEYJ102	M.RESISTOR CH 1/10W 1K	1	
R3321	ERJ6GEYJ471	M.RESISTOR CH 1/10W 470	1	
R3322	ERJ6GEYJ561	M.RESISTOR CH 1/10W 560	1	AG-DS840HP
R3323	ERJ6GEYJ471	M.RESISTOR CH 1/10W 470	1	
R3324	ERJ6GEYJ102	M.RESISTOR CH 1/10W 1K	1	
R3325	ERJ6GEYJ332	M.RESISTOR CH 1/10W 3.3K	1	AG-DS850HP
R3327	ERJ6GEYG472	M.RESISTOR CH 1/10W 4.7K	1	
R3328	ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	1	
R3329	ERJ6GEYJ332	M.RESISTOR CH 1/10W 3.3K	1	
R3330	ERJ6GEYJ223	M.RESISTOR CH 1/10W 22K	1	
R3331	ERJ6GEYG333	M.RESISTOR CH 1/10W 33K	1	
R3332	ERJ6GEYJ474	M.RESISTOR CH 1/10W 470K	1	
R3333	ERJ6GEYJ222	M.RESISTOR CH 1/10W 2.2K	1	
R3334	ERJ6GEYJ683	M.RESISTOR CH 1/10W 68K	1	
R3335	ERJ6GEYJ331	M.RESISTOR CH 1/10W 330	1	
R3336	ERJ6GEYJ101	M.RESISTOR CH 1/10W 100	1	
R3337	ERJ6GEYJ684	M.RESISTOR CH 1/10W 680K	1	
R3338	ERJ6GEYJ753	M.RESISTOR CH 1/10W 75K	1	
R3339	ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	1	
R3340	ERJ6GEYJ104	M.RESISTOR CH 1/10W 100K	1	
R3341	ERJ6GEYG153	M.RESISTOR CH 1/10W 15K	1	
R3342	ERJ6GEYJ682	M.RESISTOR CH 1/10W 6.8K	1	
R3343	VRE0034E473	M.RESISTOR CH 1/10W 47K	1	
R3344	ERJ6GEYJ102	M.RESISTOR CH 1/10W 1K	1	AG-DS850HP
R3345	ERJ6GEYJ332	M.RESISTOR CH 1/10W 3.3K	1	AG-DS850HP
R3346	ERJ6GEYJ152	M.RESISTOR CH 1/10W 1.5K	1	AG-DS850HP
R3347	ERJ6GEYJ102	M.RESISTOR CH 1/10W 1K	1	AG-DS850HP
R3349	ERJ6GEYJ221	M.RESISTOR CH 1/10W 220	1	AG-DS850HP
R3350	ERJ6GEYJ152	M.RESISTOR CH 1/10W 1.5K	1	AG-DS850HP
R3352	ERJ6GEY0R00	M.RESISTOR CH 1/10W 0	1	AG-DS850HP
R3353	ERJ6GEYG153	M.RESISTOR CH 1/10W 15K	1	AG-DS850HP
R3354	ERJ6GEYJ223	M.RESISTOR CH 1/10W 22K	1	AG-DS850HP
R3355-57	ERJ6GEYJ102	M.RESISTOR CH 1/10W 1K	3	AG-DS850HP
R3358	ERJ6GEYJ222	M.RESISTOR CH 1/10W 2.2K	1	AG-DS850HP
R3359	ERJ6GEYJ470	M.RESISTOR CH 1/10W 47	1	AG-DS850HP
R3360	ERJ6GEYJ562	M.RESISTOR CH 1/10W 5.6K	1	
R3361	ERJ6GEYJ332	M.RESISTOR CH 1/10W 3.3K	1	
R3362	ERJ6GEYJ223	M.RESISTOR CH 1/10W 22K	1	
R3363	ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	1	
R3364	ERJ6GEYJ272	M.RESISTOR CH 1/10W 2.7K	1	AG-DS850HP
R3366	ERJ6GEYJ222	M.RESISTOR CH 1/10W 2.2K	1	AG-DS850HP
R3367	ERJ6GEYJ820	M.RESISTOR CH 1/10W 82	1	AG-DS850HP
R3368	ERJ6GEYJ102	M.RESISTOR CH 1/10W 1K	1	AG-DS850HP
R3369	ERJ6GEYJ151	M.RESISTOR CH 1/10W 150	1	AG-DS850HP
R3370	ERJ6GEYJ391	M.RESISTOR CH 1/10W 390	1	AG-DS850HP
R3371,72	ERJ6GEYJ222	M.RESISTOR CH 1/10W 2.2K	2	AG-DS850HP
R3373	ERJ6GEYJ820	M.RESISTOR CH 1/10W 82	1	AG-DS850HP
R3374	ERJ6GEYJ102	M.RESISTOR CH 1/10W 1K	1	AG-DS850HP
R3375	ERJ6GEYJ681	M.RESISTOR CH 1/10W 680	1	AG-DS850HP
R3376	ERJ6GEY0R00	M.RESISTOR CH 1/10W 0	1	AG-DS850HP
R3377	ERJ6GEYJ222	M.RESISTOR CH 1/10W 2.2K	1	AG-DS850HP
R3378,79	ERJ6GEYJ331	M.RESISTOR CH 1/10W 330	2	AG-DS850HP
R3380	ERJ6GEYJ471	M.RESISTOR CH 1/10W 470	1	AG-DS850HP
R3384	ERJ6GEY0R00	M.RESISTOR CH 1/10W 0	1	
R3385	ERJ6GEYJ221	M.RESISTOR CH 1/10W 220	1	AG-DS850HP
R3386	ERJ6GEY0R00	M.RESISTOR CH 1/10W 0	1	AG-DS850HP
R3389	ERJ6GEYJ223	M.RESISTOR CH 1/10W 22K	1	AG-DS850HP
R3390	ERJ6GEYJ471	M.RESISTOR CH 1/10W 470	1	AG-DS850HP
R3391	ERJ6GEYJ152	M.RESISTOR CH 1/10W 1.5K	1	AG-DS850HP
R3392	ERJ6GEYJ102	M.RESISTOR CH 1/10W 1K	1	AG-DS850HP
R3393	ERJ6GEYG472	M.RESISTOR CH 1/10W 4.7K	1	AG-DS850HP
R3394	ERJ6GEYJ222	M.RESISTOR CH 1/10W 2.2K	1	AG-DS850HP
R3397,98	ERJ6GEYJ681	M.RESISTOR CH 1/10W 680	2	AG-DS850HP
R3399,00	ERJ6GEYJ102	M.RESISTOR CH 1/10W 1K	2	AG-DS850HP
R3401	ERJ6GEYJ152	M.RESISTOR CH 1/10W 1.5K	1	AG-DS850HP
R3402	ERJ6GEYJ222	M.RESISTOR CH 1/10W 2.2K	1	AG-DS850HP
R3403	ERJ6GEYJ102	M.RESISTOR CH 1/10W 1K	1	
R3404	ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	1	
R3405	ERJ6GEYJ821	M.RESISTOR CH 1/10W 820	1	AG-DS850HP

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
R3406	ERJ6GEYJ151	M.RESISTOR CH 1/10W 150	1	AG-DS850HP
R3407	ERJ6GEYJ102	M.RESISTOR CH 1/10W 1K	1	AG-DS850HP
R3408	ERJ6GEYJ101	M.RESISTOR CH 1/10W 100	1	AG-DS850HP
R3409,10	ERJ6GEYJ102	M.RESISTOR CH 1/10W 1K	2	AG-DS850HP
R3411	ERJ6GEYJ152	M.RESISTOR CH 1/10W 1.5K	1	AG-DS850HP
R3412-15	ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	4	
R3416	ERJ6GEYJ473	M.RESISTOR CH 1/10W 47K	1	
R3418	ERJ6GEYJ151	M.RESISTOR CH 1/10W 150	1	
R3419	ERJ6GEYJ104	M.RESISTOR CH 1/10W 100K	1	
R3420	ERJ6GEYJ563	M.RESISTOR CH 1/10W 56K	1	
R3421	ERJ6GEYJ221	M.RESISTOR CH 1/10W 220	1	
R3431	ERJ6GEYJ102	M.RESISTOR CH 1/10W 1K	1	
R3432	ERJ6GEYJ271	M.RESISTOR CH 1/10W 270	1	
R3433	ERJ6GEYG153	M.RESISTOR CH 1/10W 15K	1	
R3434	ERJ6GEYJ223	M.RESISTOR CH 1/10W 22K	1	
R3435	ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	1	
R3436,37	ERJ6GEYJ471	M.RESISTOR CH 1/10W 470	2	
R3438	ERJ6GEYJ102	M.RESISTOR CH 1/10W 1K	1	
R3439	ERJ6GEYJ821	M.RESISTOR CH 1/10W 820	1	
R3440	ERJ6GEYJ102	M.RESISTOR CH 1/10W 1K	1	
R3441	ERJ6GEYJ104	M.RESISTOR CH 1/10W 100K	1	
R3443	ERJ6GEYJ562	M.RESISTOR CH 1/10W 5.6K	1	
R3444	ERJ6GEYJ821	M.RESISTOR CH 1/10W 820	1	
R3445,46	ERJ6GEYJ272	M.RESISTOR CH 1/10W 2.7K	2	
R3447	ERJ6GEYJ562	M.RESISTOR CH 1/10W 5.6K	1	
R3448	ERJ6GEYG153	M.RESISTOR CH 1/10W 15K	1	
R3449	ERJ6GEYJ331	M.RESISTOR CH 1/10W 330	1	
R3450	ERJ6GEYJ151	M.RESISTOR CH 1/10W 150	1	
R3451	ERJ6GEYJ102	M.RESISTOR CH 1/10W 1K	1	
R3452	ERJ6GEYG333	M.RESISTOR CH 1/10W 33K	1	
R3453	ERJ6GEYJ332	M.RESISTOR CH 1/10W 3.3K	1	
R3454	ERJ6GEYJ473	M.RESISTOR CH 1/10W 47K	1	
R3455	ERJ6GEYJ222	M.RESISTOR CH 1/10W 2.2K	1	
R3456	ERJ6GEYJ391	M.RESISTOR CH 1/10W 390	1	
R3457	ERJ6GEY0R00	M.RESISTOR CH 1/10W 0	1	
R3458	ERJ6GEYJ222	M.RESISTOR CH 1/10W 2.2K	1	
R3459	ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	1	
R3460	ERJ6GEYJ561	M.RESISTOR CH 1/10W 560	1	
R3461	ERJ6GEYG153	M.RESISTOR CH 1/10W 15K	1	
R3462	ERJ6GEYJ561	M.RESISTOR CH 1/10W 560	1	
R3463	ERJ6GEYJ273	M.RESISTOR CH 1/10W 27K	1	
R3464	ERJ6GEY0R00	M.RESISTOR CH 1/10W 0	1	
R3465	ERJ6GEYJ331	M.RESISTOR CH 1/10W 330	1	
R3466-70	ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	5	
R3471	ERJ6GEYG153	M.RESISTOR CH 1/10W 15K	1	
R3472	ERJ6GEYJ471	M.RESISTOR CH 1/10W 470	1	
R3473	ERJ6GEYJ561	M.RESISTOR CH 1/10W 560	1	
R3474	ERJ6GEYJ102	M.RESISTOR CH 1/10W 1K	1	
R3475	ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	1	
R3476	ERJ6GEYJ101	M.RESISTOR CH 1/10W 100	1	
R3477	ERJ6GEYJ821	M.RESISTOR CH 1/10W 820	1	
R3478	ERJ6GEYJ222	M.RESISTOR CH 1/10W 2.2K	1	
R3481	ERJ6GEYJ391	M.RESISTOR CH 1/10W 390	1	
R3482	ERJ6GEYJ330	M.RESISTOR CH 1/10W 33	1	
R3483	ERJ6GEYJ681	M.RESISTOR CH 1/10W 680	1	
R3502	ERJ6GEYJ561	M.RESISTOR CH 1/10W 560	1	
R3503	ERJ6GEYJ332	M.RESISTOR CH 1/10W 3.3K	1	
R3504-10	ERJ6GEYJ152	M.RESISTOR CH 1/10W 1.5K	7	
R3511	ERJ6GEYJ182	M.RESISTOR CH 1/10W 1.8K	1	
R3512	ERJ6GEYJ561	M.RESISTOR CH 1/10W 560	1	
R3513	ERJ6GEYJ392	M.RESISTOR CH 1/10W 3.9K	1	
R3514	ERJ6GEYJ152	M.RESISTOR CH 1/10W 1.5K	1	
R3516	ERJ6GEYJ102	M.RESISTOR CH 1/10W 1.2K	1	AG-DS840HP
R3517	ERJ6GEYJ152	M.RESISTOR CH 1/10W 1.5K	1	
R3518,19	ERJ6GEYJ393	M.RESISTOR CH 1/10W 39K	2	
R3520	ERJ6GEYJ562	M.RESISTOR CH 1/10W 5.6K	1	
R3527	ERJ6GEYG153	M.RESISTOR CH 1/10W 15K	1	
R3528	ERJ6GEYJ393	M.RESISTOR CH 1/10W 39K	1	
R3529	ERJ6GEYJ332	M.RESISTOR CH 1/10W 3.3K	1	
R3530	ERJ6GEYJ102	M.RESISTOR CH 1/10W 1K	1	
R3531	ERJ6GEYJ272	M.RESISTOR CH 1/10W 2.7K	1	AG-DS850HP
R3535	ERJ6GEYJ272	M.RESISTOR CH 1/10W 2.7K	1	AG-DS850HP
R3536	ERJ6GEYJ393	M.RESISTOR CH 1/10W 39K	1	
R3537	ERJ6GEYJ104	M.RESISTOR CH 1/10W 100K	1	AG-DS850HP
R3538	ERJ6GEYJ101	M.RESISTOR CH 1/10W 100	1	

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
R3539	ERJ6GEY0R00	M.RESISTOR CH 1/10W 0	1	AG-DS850HP
R3540,41	ERJ6GEY0R00	M.RESISTOR CH 1/10W 0	2	
R3542	ERJ6GEYJ391	M.RESISTOR CH 1/10W 390	1	AG-DS850HP
R3543	ERJ6GEYJ681	M.RESISTOR CH 1/10W 680	1	AG-DS850HP
R3544	ERJ6GEYJ101	M.RESISTOR CH 1/10W 100	1	AG-DS850HP
R3547-49	ERJ6GEY0R00	M.RESISTOR CH 1/10W 0	3	AG-DS850HP
R3552	ERJ6GEYG472	M.RESISTOR CH 1/10W 4.7K	1	
R3563	ERJ6GEYJ102	M.RESISTOR CH 1/10W 1K	1	AG-DS850HP
R3565	ERJ6GEYJ470	M.RESISTOR CH 1/10W 47	1	AG-DS850HP
R3566	ERJ6GEYJ102	M.RESISTOR CH 1/10W 1K	1	AG-DS850HP
R3567	ERJ6GEYJ470	M.RESISTOR CH 1/10W 47	1	AG-DS850HP
R3568	ERJ6GEYJ105	M.RESISTOR CH 1/10W 1M	1	
R3569	ERJ6GEYJ822	M.RESISTOR CH 1/10W 8.2K	1	
R3570	ERJ6GEYJ473	M.RESISTOR CH 1/10W 47K	1	
R3572	ERJ6GEYG472	M.RESISTOR CH 1/10W 4.7K	1	
VR3001	EVN32CA00B24	V.RESISTOR 20K	1	AG-DS850HP
VR3003	EVN32CA00B53	V.RESISTOR 5K	1	AG-DS850HP
VR3006	EVN32CA00B24	V.RESISTOR 20K	1	AG-DS850HP
VR3007-11	EVM7DGA00B54	V.RESISTOR 50K	5	
VR3014,15	EVM7DGA00B24	V.RESISTOR 20K	2	
VR3201	EVN32CA00B14	V.RESISTOR 10K	1	
VR3204	EVM7JSX30B13	V.RESISTOR	1	
VR3205	EVM7JSX30B13	V.RESISTOR	1	AG-DS850HP
VR3301	EVN32CA00B14	V.RESISTOR 10K	1	AG-DS850HP
VR3305	EVN32CA00B23	V.RESISTOR 2K	1	AG-DS850HP
VR3431	EVM7JSX30B52	V.RESISTOR	1	
X3001	VSX0160	CRYSTAL OSCILLATOR	1	<R>AG-DS850HP
		MISCELLANEOUS		
	VMZ2228	INSULATER	1	
	VSC3973	SHIELD PLATE	1	
	XTV3+6FFR	SCREW	2	

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
	VEP04419A	P.C.BOARD W/COMPONENT		
		MIC JACK		
C4301	ECEA1CKA100	E.CAPACITOR 16V 10U	1	
C4302	ECUM1H102KBN	C.CAPACITOR CH 50V 1000P	1	
C4303-05	ECEA1CKA470	E.CAPACITOR 16V 47U	3	
C4306	ECEA1CKA100	E.CAPACITOR 16V 10U	1	
C4307	ECUM1H102KBN	C.CAPACITOR CH 50V 1000P	1	
C4308	ECEA1CKA470	E.CAPACITOR 16V 47U	1	
C4310,11	ECKF1H103ZF	C.CAPACITOR 50V 0.01U	2	
FL4301,02	VLF0523	FILTER	2	
IC4301	NJM2068MD	IC	1	<R>
J4301,02	VJJ0078	JACK	2	
P4301	VJP3076	CONNECTOR	1	
Q4301	MSD602-R	TRANSISTOR	1	<R>
R4301,02	ERJ6GEYJ224	M.RESISTOR CH 1/10W 220K	2	
R4303	ERJ6GEYJ561	M.RESISTOR CH 1/10W 560	1	
R4304	ERJ6GEYJ124	M.RESISTOR CH 1/10W 120K	1	
R4305	ERJ6GEYJ753	M.RESISTOR CH 1/10W 75K	1	
R4306	ERJ6GEYJ182	M.RESISTOR CH 1/10W 1.8K	1	
R4307,08	ERJ6GEYJ224	M.RESISTOR CH 1/10W 220K	2	
R4309	ERJ6GEYJ124	M.RESISTOR CH 1/10W 120K	1	
R4310	ERJ6GEYJ753	M.RESISTOR CH 1/10W 75K	1	
R4311,12	ERJ6GEYJ330	M.RESISTOR CH 1/10W 33	2	
R4314,15	ERJ6GEY0R00	M.RESISTOR CH 1/10W 0	2	
R4316	ERJ6GEYJ561	M.RESISTOR CH 1/10W 560	1	
		MISCELLANEOUS		
	VSC3429	SHIELD COVER	1	
	VMP3224	MIC JACK ANGLE	1	
	VQL4821	LABEL	1	

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
R3539	ERJ6GEY0R00	M.RESISTOR CH 1/10W 0	1	AG-DS850HP
R3540,41	ERJ6GEY0R00	M.RESISTOR CH 1/10W 0	2	
R3542	ERJ6GEYJ391	M.RESISTOR CH 1/10W 390	1	AG-DS850HP
R3543	ERJ6GEYJ681	M.RESISTOR CH 1/10W 680	1	AG-DS850HP
R3544	ERJ6GEYJ101	M.RESISTOR CH 1/10W 100	1	AG-DS850HP
R3547-49	ERJ6GEY0R00	M.RESISTOR CH 1/10W 0	3	AG-DS850HP
R3552	ERJ6GEYG472	M.RESISTOR CH 1/10W 4.7K	1	
R3563	ERJ6GEYJ102	M.RESISTOR CH 1/10W 1K	1	AG-DS850HP
R3565	ERJ6GEYJ470	M.RESISTOR CH 1/10W 47	1	AG-DS850HP
R3566	ERJ6GEYJ102	M.RESISTOR CH 1/10W 1K	1	AG-DS850HP
R3567	ERJ6GEYJ470	M.RESISTOR CH 1/10W 47	1	AG-DS850HP
R3568	ERJ6GEYJ105	M.RESISTOR CH 1/10W 1M	1	
R3569	ERJ6GEYJ822	M.RESISTOR CH 1/10W 8.2K	1	
R3570	ERJ6GEYJ473	M.RESISTOR CH 1/10W 47K	1	
R3572	ERJ6GEYG472	M.RESISTOR CH 1/10W 4.7K	1	
VR3001	EVN32CA00B24	V.RESISTOR 20K	1	AG-DS850HP
VR3003	EVN32CA00B53	V.RESISTOR 5K	1	AG-DS850HP
VR3006	EVN32CA00B24	V.RESISTOR 20K	1	AG-DS850HP
VR3007-11	EVM7DGA00B54	V.RESISTOR 50K	5	
VR3014,15	EVM7DGA00B24	V.RESISTOR 20K	2	
VR3201	EVN32CA00B14	V.RESISTOR 10K	1	
VR3204	EVM7JSX30B13	V.RESISTOR	1	
VR3205	EVM7JSX30B13	V.RESISTOR	1	AG-DS850HP
VR3301	EVN32CA00B14	V.RESISTOR 10K	1	AG-DS850HP
VR3305	EVN32CA00B23	V.RESISTOR 2K	1	AG-DS850HP
VR3431	EVM7JSX30B52	V.RESISTOR	1	
X3001	VSX0160	CRYSTAL OSCILLATOR	1	<R>AG-DS850HP
		MISCELLANEOUS		
E48	VMZ2228	INSULATER	1	
E49	VSC3973	SHIELD PLATE	1	
E50	XTV3+6FFR	SCREW	2	

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
	VEP04419A	P.C.BOARD W/COMPONENT		
		MIC JACK		
C4301	ECEA1CKA100	E.CAPACITOR 16V 10U	1	
C4302	ECUM1H102KBN	C.CAPACITOR CH 50V 1000P	1	
C4303-05	ECEA1CKA470	E.CAPACITOR 16V 47U	3	
C4306	ECEA1CKA100	E.CAPACITOR 16V 10U	1	
C4307	ECUM1H102KBN	C.CAPACITOR CH 50V 1000P	1	
C4308	ECEA1CKA470	E.CAPACITOR 16V 47U	1	
C4310,11	ECKF1H103ZF	C.CAPACITOR 50V 0.01U	2	
FL4301,02	VLF0523	FILTER	2	
IC4301	NJM2068MD	IC	1	<R>
J4301,02	VJJ0078	JACK	2	
P4301	VJP3076	CONNECTOR	1	
Q4301	MSD602-R	TRANSISTOR	1	<R>
R4301,02	ERJ6GEYJ224	M.RESISTOR CH 1/10W 220K	2	
R4303	ERJ6GEYJ561	M.RESISTOR CH 1/10W 560	1	
R4304	ERJ6GEYJ124	M.RESISTOR CH 1/10W 120K	1	
R4305	ERJ6GEYJ753	M.RESISTOR CH 1/10W 75K	1	
R4306	ERJ6GEYJ182	M.RESISTOR CH 1/10W 1.8K	1	
R4307,08	ERJ6GEYJ224	M.RESISTOR CH 1/10W 220K	2	
R4309	ERJ6GEYJ124	M.RESISTOR CH 1/10W 120K	1	
R4310	ERJ6GEYJ753	M.RESISTOR CH 1/10W 75K	1	
R4311,12	ERJ6GEYJ330	M.RESISTOR CH 1/10W 33	2	
R4314,15	ERJ6GEY0R00	M.RESISTOR CH 1/10W 0	2	
R4316	ERJ6GEYJ561	M.RESISTOR CH 1/10W 560	1	
		MISCELLANEOUS		
E62	VSC3429	SHIELD COVER	1	
E63	VMP3224	MIC JACK ANGLE	1	
	VQL4821	LABEL	1	

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
C40156-58	ECUM1H103KBN	C.CAPACITOR CH 50V 0.01U	3	
C40159,60	ECEA1HGE100	E.CAPACITOR 50V 10U	2	AG-DS850HP
C40161	ECEA1AGE101	E.CAPACITOR 10V 100U	1	AG-DS850HP
C40162,63	ECEA1HGE100	E.CAPACITOR 50V 10U	2	AG-DS850HP
C40164	ECEA1CN100S	E.CAPACITOR 16V 10U	1	AG-DS850HP
C40165,66	ECUM1H103KBN	C.CAPACITOR CH 50V 0.01U	2	AG-DS850HP
C40167	ECEA1HGE100	E.CAPACITOR 50V 10U	1	AG-DS850HP
C40168	ECEA1CN100S	E.CAPACITOR 16V 10U	1	AG-DS850HP
C40169	ECEA1VGE330	E.CAPACITOR 35V 33U	1	AG-DS850HP
C40170	ECEA1HGE010	E.CAPACITOR 50V 1U	1	AG-DS850HP
C40171	ECEA1CGE470	E.CAPACITOR 16V 47U	1	AG-DS850HP
C40172	ECEA1VGE330	E.CAPACITOR 35V 33U	1	AG-DS850HP
C40173	ECEA1CGE470	E.CAPACITOR 16V 47U	1	AG-DS850HP
C40175	ECEA1CGE101	E.CAPACITOR 16V 100U	1	AG-DS850HP
C40176	ECEA1CGE470	E.CAPACITOR 16V 47U	1	AG-DS850HP
C40180-83	ECEA1HGE100	E.CAPACITOR 50V 10U	4	AG-DS850HP
D40001	MA151K	DIODE	1	<R>AG-DS850HP
D40002	MA151K	DIODE	1	<R>
D40003	MA151K	DIODE	1	<R>AG-DS850HP
D40004	MA151K	DIODE	1	<R>
D40005,06	MA151K	DIODE	2	<R>AG-DS850HP
D40007	MA151K	DIODE	1	<R>
D40008,09	MA151K	DIODE	2	<R>AG-DS850HP
D40010	MA151K	DIODE	1	<R>
D40011	MA151K	DIODE	1	<R>AG-DS850HP
D40012,13	MA151WA	DIODE	2	<R>AG-DS850HP
D40014,15	MA151K	DIODE	2	<R>
D40016	MA151WK	DIODE	1	<R>
D40017	MA151K	DIODE	1	<R>
D40018	MA723	DIODE	1	<R>
D40019	MA165VT	DIODE	1	<R>
D40020,21	MA151K	DIODE	2	<R>AG-DS850HP
FL40001,2	VLF0402	FILTER	2	
IC40001	HA12005	IC	1	<R>
IC40002	NE646N	IC	1	<R>
IC40003	HA12005	IC	1	<R>
IC40004	NE646N	IC	1	<R>
IC40005	UPC4558G2	IC	1	<R>AG-DS850HP
IC40006,7	MN1280-R	IC	2	<R>
IC40008	AN360	IC	1	<R>
IC40009	MC14053BF	IC	1	<R>
IC40010-2	MC74HC595AF	IC	3	<R>
IC40013-5	TD62503F	IC	3	<R>
IC40016	MC14066BF	IC	1	<R>AG-DS850HP
IC40017	MC14053BF	IC	1	<R>AG-DS850HP
IC40018,9	AN6558S	IC	2	<R>AG-DS850HP
IC40020	M51132L	IC	1	<R>AG-DS850HP
IC40021	TC7S32F	IC	1	<R>
J40002-05	ERJ6GEY0R00	M.RESISTOR CH 1/10W 0	4	
L40001	VLQEL06F102K	COIL 1000UH	1	AG-DS850HP
L40002	VLQ0123	COIL	1	AG-DS850HP
L40003	VLQEL06F102K	COIL 1000UH	1	AG-DS850HP
L40004,05	VLQEL06F471K	COIL 470UH	2	AG-DS850HP
L40006	VLQEL06F102K	COIL 1000UH	1	
L40007	VLQ0123	COIL	1	AG-DS850HP
L40008,09	VLQEL06F102K	COIL 1000UH	2	
L40010	VLQ0460	COIL	1	AG-DS850HP
P40001	VJP1231T	CONNECTOR (MALE) 4P	1	AG-DS850HP

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
P40002	VJP1230R	CONNECTOR (MALE) 3P	1	
P40003	VJP1230T	CONNECTOR (MALE) 3P	1	
P40004	VJP31768064	CONNECTOR (MALE) 64P	1	
Q40001	2SD1306	TRANSISTOR	1	<R>AG-DS850HP
Q40002,03	2SD1149-R	TRANSISTOR	2	<R>AG-DS850HP
Q40004	2SB709A	TRANSISTOR	1	<R>AG-DS850HP
Q40005,06	MSD601-R	TRANSISTOR	2	<R>AG-DS850HP
Q40007	MSB709-R	TRANSISTOR	1	<R>AG-DS850HP
Q40008	2SD636	TRANSISTOR	1	<R>
Q40009	2SD1862	TRANSISTOR	1	<R>AG-DS850HP
Q40010	2SB643	TRANSISTOR	1	<R>AG-DS850HP
Q40011	2SD1149-R	TRANSISTOR	1	<R>AG-DS850HP
Q40012	MSB709-R	TRANSISTOR	1	<R>AG-DS850HP
Q40013	2SD1149-R	TRANSISTOR	1	<R>AG-DS850HP
Q40014,15	2SD602A	TRANSISTOR	2	<R>AG-DS850HP
Q40016,17	2SB710A-R	TRANSISTOR	2	<R>AG-DS850HP
Q40018	2SD1862	TRANSISTOR	1	<R>AG-DS850HP
Q40019	MSB709-R	TRANSISTOR	1	<R>AG-DS850HP
Q40020,21	2SD602A	TRANSISTOR	2	<R>
Q40022,23	2SC2405	TRANSISTOR	2	<R>
Q40024	2SD1306	TRANSISTOR	1	<R>
Q40025	2SD1306	TRANSISTOR	1	<R>AG-DS850HP
Q40026	2SD1149-R	TRANSISTOR	1	<R>AG-DS850HP
Q40027	2SB709A	TRANSISTOR	1	<R>AG-DS850HP
Q40028	2SD1149-R	TRANSISTOR	1	<R>AG-DS850HP
Q40029,30	MSD601-R	TRANSISTOR	2	<R>AG-DS850HP
Q40031	MSB709-R	TRANSISTOR	1	<R>AG-DS850HP
Q40032	2SD636	TRANSISTOR	1	<R>AG-DS850HP
Q40033	2SD1149-R	TRANSISTOR	1	<R>AG-DS850HP
Q40034	MSB709-R	TRANSISTOR	1	<R>AG-DS850HP
Q40035	2SB643	TRANSISTOR	1	<R>AG-DS850HP
Q40036	2SD1862	TRANSISTOR	1	<R>AG-DS850HP
Q40037	MSB709-R	TRANSISTOR	1	<R>AG-DS850HP
Q40038,39	2SD602A	TRANSISTOR	2	<R>AG-DS850HP
Q40040	2SB710A-R	TRANSISTOR	1	<R>AG-DS850HP
Q40041,42	2SC2405	TRANSISTOR	2	<R>
Q40043	2SD1306	TRANSISTOR	1	<R>
Q40044	2SD1149-R	TRANSISTOR	1	<R>AG-DS850HP
Q40045	MSB709-R	TRANSISTOR	1	<R>
Q40046	2SB710A-R	TRANSISTOR	1	<R>
Q40047	2SD602-R	TRANSISTOR	1	<R>AG-DS850HP
Q40048	MSD601-R	TRANSISTOR	1	<R>AG-DS850HP
Q40049	2SD1862	TRANSISTOR	1	<R>AG-DS850HP
Q40050,51	2SB710A-R	TRANSISTOR	2	<R>AG-DS850HP
QR40001-3	MRN1403	TRANSISTOR	3	<R>AG-DS850HP
QR40004	UN2114	TRANSISTOR-RESISTOR	1	<R>AG-DS850HP
QR40005	MRN1403	TRANSISTOR	1	<R>AG-DS850HP
QR40006	MRN1404	TRANSISTOR	1	<R>AG-DS850HP
QR40007	MRN1403	TRANSISTOR	1	<R>AG-DS850HP
QR40008-0	MRN2403	TRANSISTOR	3	<R>
QR40011	MRN1403	TRANSISTOR	1	<R>
QR40012	MRN1402	TRANSISTOR	1	<R>
QR40013	UN2217	TRANSISTOR-RESISTOR	1	<R>AG-DS850HP
QR40014	UN2215	TRANSISTOR-RESISTOR	1	<R>AG-DS850HP
QR40015-7	MRN1403	TRANSISTOR	3	<R>AG-DS850HP
QR40018	UN2114	TRANSISTOR-RESISTOR	1	<R>AG-DS850HP
QR40019	MRN1403	TRANSISTOR	1	<R>AG-DS850HP
QR40020-2	MRN2403	TRANSISTOR	3	<R>
QR40023	MRN1403	TRANSISTOR	1	<R>
QR40024	MRN1402	TRANSISTOR	1	<R>
QR40025	MRN1403	TRANSISTOR	1	<R>AG-DS850HP
QR40026	UN2215	TRANSISTOR-RESISTOR	1	<R>AG-DS850HP
QR40027	UN2217	TRANSISTOR-RESISTOR	1	<R>AG-DS850HP
QR40028	MRN1404	TRANSISTOR	1	<R>AG-DS850HP
QR40029	MRN2404	TRANSISTOR	1	<R>AG-DS850HP
QR40030,1	MRN2404	TRANSISTOR	2	<R>
QR40032	MRN2404	TRANSISTOR	1	<R>AG-DS850HP
QR40050-3	MRN1402	TRANSISTOR	4	<R>AG-DS850HP

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
R40001-04	ERJ6GEYG472	M.RESISTOR CH 1/10W 4.7K	3	AG-DS850HP
R40004	ERJ6GEYJ272	M.RESISTOR CH 1/10W 2.7K	1	AG-DS850HP
R40005	ERJ6GEYG472	M.RESISTOR CH 1/10W 4.7K	1	AG-DS850HP
R40006	ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	1	AG-DS850HP
R40007	ERJ6GEYG472	M.RESISTOR CH 1/10W 4.7K	1	AG-DS850HP
R40008	ERJ6GEYJ223	M.RESISTOR CH 1/10W 22K	1	AG-DS850HP
R40009	ERJ6GEYJ123	M.RESISTOR CH 1/10W 12K	1	AG-DS850HP
R40010	ERJ6GEYJ154	M.RESISTOR CH 1/10W 150K	1	
R40011,12	ERJ6GEYJ682	M.RESISTOR CH 1/10W 6.8K	2	
R40013	ERJ6GEYJ273	M.RESISTOR CH 1/10W 27K	1	AG-DS850HP
R40014	ERJ6GEYJ822	M.RESISTOR CH 1/10W 8.2K	1	AG-DS850HP
R40015	ERJ6GEYJ104	M.RESISTOR CH 1/10W 100K	1	AG-DS850HP
R40016	ERJ6GEYG333	M.RESISTOR CH 1/10W 33K	1	AG-DS850HP
R40017	ERJ6GEYJ104	M.RESISTOR CH 1/10W 100K	1	AG-DS850HP
R40018	ERJ6GEYJ102	M.RESISTOR CH 1/10W 1K	1	AG-DS850HP
R40019	ERJ6GEYJ824	M.RESISTOR CH 1/10W 820K	1	AG-DS850HP
R40020,21	ERJ6GEYG472	M.RESISTOR CH 1/10W 4.7K	2	AG-DS850HP
R40022	ERJ6GEYJ822	M.RESISTOR CH 1/10W 8.2K	1	
R40023	ERJ6GEYJ562	M.RESISTOR CH 1/10W 5.6K	1	AG-DS850HP
R40024	ERJ6GEYJ182	M.RESISTOR CH 1/10W 1.8K	1	
R40025	ERJ6GEYJ184	M.RESISTOR CH 1/10W 180K	1	
R40026,27	ERJ6GEYJ102	M.RESISTOR CH 1/10W 1K	2	
R40028	ERJ6GEYJ274	M.RESISTOR CH 1/10W 270K	1	
R40029	ERJ6GEYJ104	M.RESISTOR CH 1/10W 100K	1	
R40030	ERJ6GEYJ123	M.RESISTOR CH 1/10W 12K	1	AG-DS850HP
R40031	VRE0034E564	M.RESISTOR CH 1/10W 560K	1	
R40032	ERJ6GEYJ123	M.RESISTOR CH 1/10W 12K	1	
R40033	VRE0034E104	M.RESISTOR CH 1/10W 100K	1	
R40034	ERJ6GEYJ473	M.RESISTOR CH 1/10W 47K	1	
R40035	ERJ6GEYJ222	M.RESISTOR CH 1/10W 2.2K	1	
R40036	ERJ6GEYJ221	M.RESISTOR CH 1/10W 220	1	
R40037	ERJ6GEYJ222	M.RESISTOR CH 1/10W 2.2K	1	
R40038	ERJ6GEYJ221	M.RESISTOR CH 1/10W 220	1	
R40039	ERJ6GEYJ473	M.RESISTOR CH 1/10W 47K	1	
R40040	ERJ6GEYJ561	M.RESISTOR CH 1/10W 560	1	
R40041	ERJ6GEYJ393	M.RESISTOR CH 1/10W 39K	1	
R40042	ERJ6GEYJ102	M.RESISTOR CH 1/10W 1K	1	
R40043	ERJ6GEYJ104	M.RESISTOR CH 1/10W 100K	1	
R40044	ERJ6GEYJ104	M.RESISTOR CH 1/10W 100K	1	AG-DS850HP
R40045	ERJ6GEYJ222	M.RESISTOR CH 1/10W 2.2K	1	
R40046	ERJ6GEYG472	M.RESISTOR CH 1/10W 4.7K	1	
R40047	ERJ6GEYJ473	M.RESISTOR CH 1/10W 47K	1	AG-DS850HP
R40048	ERJ6GEYJ223	M.RESISTOR CH 1/10W 22K	1	
R40049	ERJ6GEYJ562	M.RESISTOR CH 1/10W 5.6K	1	
R40050,51	ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	2	
R40052	ERJ6GEYJ105	M.RESISTOR CH 1/10W 1M	1	
R40053	ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	1	
R40054	ERJ6GEYJ473	M.RESISTOR CH 1/10W 47K	1	
R40055	ERJ6GEYJ332	M.RESISTOR CH 1/10W 3.3K	1	
R40056	ERJ6GEYJ181	M.RESISTOR CH 1/10W 180	1	
R40057	ERJ6GEYJ102	M.RESISTOR CH 1/10W 1K	1	
R40058	ERJ6GEYG472	M.RESISTOR CH 1/10W 4.7K	1	
R40059	ERJ6GEYG333	M.RESISTOR CH 1/10W 33K	1	
R40060	ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	1	AG-DS850HP
R40061	ERJ6GEYJ223	M.RESISTOR CH 1/10W 22K	1	AG-DS850HP
R40062	ERJ6GEYJ564	M.RESISTOR CH 1/10W 560K	1	AG-DS850HP
R40063	ERJ14YJ330	M.RESISTOR CH 1/4W 33	1	AG-DS850HP
R40064	ERJ6GEYJ681	M.RESISTOR CH 1/10W 680	1	AG-DS850HP
R40065	ERJ6GEYG472	M.RESISTOR CH 1/10W 4.7K	1	AG-DS850HP
R40066	ERJ6GEYJ682	M.RESISTOR CH 1/10W 6.8K	1	AG-DS850HP
R40067	ERJ6GEYJ102	M.RESISTOR CH 1/10W 1K	1	AG-DS850HP
R40068	ERJ6GEYJ183	M.RESISTOR CH 1/10W 18K	1	AG-DS850HP
R40069	ERJ6GEYJ104	M.RESISTOR CH 1/10W 100K	1	AG-DS850HP
R40070	ERJ6GEYJ823	M.RESISTOR CH 1/10W 82K	1	AG-DS850HP
R40071	ERJ6GEYJ273	M.RESISTOR CH 1/10W 27K	1	AG-DS850HP
R40072	ERJ6GEYJ221	M.RESISTOR CH 1/10W 220	1	AG-DS850HP
R40073	ERJ6GEYJ222	M.RESISTOR CH 1/10W 2.2K	1	AG-DS850HP
R40074	ERJ6GEYJ223	M.RESISTOR CH 1/10W 22K	1	AG-DS850HP
R40075	ERJ6GEYJ682	M.RESISTOR CH 1/10W 6.8K	1	AG-DS850HP
R40076	ERDS1VJ100	C.RESISTOR 1/2W 10	1	AG-DS850HP
R40077	ERJ6GEYJ562	M.RESISTOR CH 1/10W 5.6K	1	AG-DS850HP
R40078	ERJ6GEYJ102	M.RESISTOR CH 1/10W 1K	1	AG-DS850HP
R40079-81	ERJ6GEYG472	M.RESISTOR CH 1/10W 4.7K	3	AG-DS850HP

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
R40082	ERJ6GEYJ155	M.RESISTOR CH 1/16W 1.5M	1	AG-DS850HP
R40083	ERJ6GEYJ392	M.RESISTOR CH 1/10W 3.9K	1	AG-DS850HP
R40084	ERJ6GEYJ821	M.RESISTOR CH 1/10W 820	1	AG-DS850HP
R40085	ERJ6GEYJ155	M.RESISTOR CH 1/16W 1.5M	1	AG-DS850HP
R40086,87	ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	2	AG-DS850HP
R40088	ERJ14YJ220	M.RESISTOR CH 1/4W 22K	1	AG-DS850HP
R40089	ERJ6GEYG333	M.RESISTOR CH 1/10W 33K	1	AG-DS850HP
R40090	ERJ6GEYJ123	M.RESISTOR CH 1/10W 12K	1	AG-DS850HP
R40091,92	ERJ6GEYJ562	M.RESISTOR CH 1/10W 5.6K	2	AG-DS850HP
R40093,94	ERJ6GEYG472	M.RESISTOR CH 1/10W 4.7K	2	AG-DS850HP
R40095	ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	1	AG-DS850HP
R40096	ERJ6GEYG472	M.RESISTOR CH 1/10W 4.7K	1	AG-DS850HP
R40097	ERJ6GEYJ272	M.RESISTOR CH 1/10W 2.7K	1	AG-DS850HP
R40098	ERJ6GEYG472	M.RESISTOR CH 1/10W 4.7K	1	AG-DS850HP
R40099	ERJ6GEYJ123	M.RESISTOR CH 1/10W 12K	1	AG-DS850HP
R40100	ERJ6GEYJ223	M.RESISTOR CH 1/10W 22K	1	AG-DS850HP
R40101	ERJ6GEYG472	M.RESISTOR CH 1/10W 4.7K	1	AG-DS850HP
R40102	ERJ6GEYJ154	M.RESISTOR CH 1/10W 150K	1	
R40103	ERJ6GEYJ123	M.RESISTOR CH 1/10W 12K	1	AG-DS850HP
R40104	VRE0034E564	M.RESISTOR CH 1/10W 560K	1	
R40105	ERJ6GEYJ123	M.RESISTOR CH 1/10W 12K	1	
R40106	VRE0034E104	M.RESISTOR CH 1/10W 100K	1	
R40107	ERJ6GEYJ473	M.RESISTOR CH 1/10W 47K	1	
R40108	ERJ6GEYJ222	M.RESISTOR CH 1/10W 2.2K	1	
R40109	ERJ6GEYJ221	M.RESISTOR CH 1/10W 220	1	
R40110	ERJ6GEYJ222	M.RESISTOR CH 1/10W 2.2K	1	
R40111	ERJ6GEYJ221	M.RESISTOR CH 1/10W 220	1	
R40112	ERJ6GEYJ473	M.RESISTOR CH 1/10W 47K	1	
R40113	ERJ6GEYJ561	M.RESISTOR CH 1/10W 560	1	
R40114	ERJ6GEYJ393	M.RESISTOR CH 1/10W 39K	1	
R40115	ERJ6GEYJ102	M.RESISTOR CH 1/10W 1K	1	
R40116	ERJ6GEYJ104	M.RESISTOR CH 1/10W 100K	1	
R40117	ERJ6GEYJ223	M.RESISTOR CH 1/10W 22K	1	
R40118	ERJ6GEYJ473	M.RESISTOR CH 1/10W 47K	1	AG-DS850HP
R40119	ERJ6GEYJ104	M.RESISTOR CH 1/10W 100K	1	AG-DS850HP
R40120	ERJ6GEYJ562	M.RESISTOR CH 1/10W 5.6K	1	
R40121	ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	1	
R40122	ERJ6GEYJ222	M.RESISTOR CH 1/10W 2.2K	1	
R40123	ERJ6GEYG472	M.RESISTOR CH 1/10W 4.7K	1	
R40124	ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	1	
R40125	ERJ6GEYJ105	M.RESISTOR CH 1/10W 1M	1	
R40127	ERJ6GEYG472	M.RESISTOR CH 1/10W 4.7K	1	AG-DS850HP
R40128	ERJ6GEYJ562	M.RESISTOR CH 1/10W 5.6K	1	AG-DS850HP
R40129	ERJ6GEYJ822	M.RESISTOR CH 1/10W 8.2K	1	
R40130	ERJ6GEYJ682	M.RESISTOR CH 1/10W 6.8K	1	
R40131	ERJ6GEYJ273	M.RESISTOR CH 1/10W 27K	1	AG-DS850HP
R40132	ERJ6GEYJ682	M.RESISTOR CH 1/10W 6.8K	1	
R40133	ERJ6GEYG333	M.RESISTOR CH 1/10W 33K	1	AG-DS850HP
R40134	ERJ6GEYJ104	M.RESISTOR CH 1/10W 100K	1	AG-DS850HP
R40135	ERJ6GEYJ822	M.RESISTOR CH 1/10W 8.2K	1	AG-DS850HP
R40136	ERJ6GEYJ104	M.RESISTOR CH 1/10W 100K	1	AG-DS850HP
R40137	ERJ6GEYJ102	M.RESISTOR CH 1/10W 1K	1	AG-DS850HP
R40138	ERJ6GEYJ824	M.RESISTOR CH 1/10W 820K	1	AG-DS850HP
R40139	ERJ6GEYG472	M.RESISTOR CH 1/10W 4.7K	1	AG-DS850HP
R40140	ERJ6GEYJ182	M.RESISTOR CH 1/10W 1.8K	1	
R40141	ERJ6GEYJ102	M.RESISTOR CH 1/10W 1K	1	
R40142	ERJ6GEYJ184	M.RESISTOR CH 1/10W 180K	1	
R40143	ERJ6GEYJ102	M.RESISTOR CH 1/10W 1K	1	
R40144	ERJ6GEYJ274	M.RESISTOR CH 1/10W 270K	1	
R40145	ERJ6GEYJ104	M.RESISTOR CH 1/10W 100K	1	
R40146	ERJ6GEYJ473	M.RESISTOR CH 1/10W 47K	1	
R40147	ERJ6GEYJ332	M.RESISTOR CH 1/10W 3.3K	1	
R40148	ERJ6GEYJ181	M.RESISTOR CH 1/10W 180	1	
R40149	ERJ6GEYJ102	M.RESISTOR CH 1/10W 1K	1	
R40150	ERJ6GEYG333	M.RESISTOR CH 1/10W 33K	1	
R40151	ERJ6GEYG472	M.RESISTOR CH 1/10W 4.7K	1	
R40152	ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	1	AG-DS850HP
R40153	ERJ6GEYJ223	M.RESISTOR CH 1/10W 22K	1	AG-DS850HP
R40154	ERJ6GEYJ564	M.RESISTOR CH 1/10W 560K	1	AG-DS850HP
R40155	ERJ6GEYJ221	M.RESISTOR CH 1/10W 220	1	AG-DS850HP
R40156	ERJ6GEY0R00	M.RESISTOR CH 1/10W 0	1	AG-DS850HP
R40157	ERJ6GEYJ222	M.RESISTOR CH 1/10W 2.2K	1	AG-DS850HP
R40158	ERJ6GEYJ104	M.RESISTOR CH 1/10W 100K	1	AG-DS850HP
R40159	ERJ6GEYJ273	M.RESISTOR CH 1/10W 27K	1	AG-DS850HP
R40160	ERJ6GEYJ823	M.RESISTOR CH 1/10W 82K	1	AG-DS850HP

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
R40161-63	ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	3	AG-DS850HP
R40164	ERJ6GEYJ155	M.RESISTOR CH 1/16W 1.5M	1	AG-DS850HP
R40165	ERJ6GEYJ821	M.RESISTOR CH 1/10W 820	1	AG-DS850HP
R40166	ERJ6GEYJ392	M.RESISTOR CH 1/10W 3.9K	1	AG-DS850HP
R40167	ERJ6GEYJ155	M.RESISTOR CH 1/16W 1.5M	1	AG-DS850HP
R40168	ERJ14YJ330	M.RESISTOR CH 1/4W 33	1	AG-DS850HP
R40169	ERJ6GEYJ681	M.RESISTOR CH 1/10W 680	1	AG-DS850HP
R40170	ERJ6GEYG472	M.RESISTOR CH 1/10W 4.7K	1	AG-DS850HP
R40171	ERJ6GEYJ102	M.RESISTOR CH 1/10W 1K	1	AG-DS850HP
R40172	ERJ6GEYJ682	M.RESISTOR CH 1/10W 6.8K	1	AG-DS850HP
R40173	ERJ6GEYJ223	M.RESISTOR CH 1/10W 22K	1	AG-DS850HP
R40174	ERJ6GEYJ682	M.RESISTOR CH 1/10W 6.8K	1	AG-DS850HP
R40175	ERDS1VJ100	C.RESISTOR 1/2W 10	1	AG-DS850HP
R40176	ERJ6GEYJ562	M.RESISTOR CH 1/10W 5.6K	1	AG-DS850HP
R40177	ERJ6GEYJ102	M.RESISTOR CH 1/10W 1K	1	AG-DS850HP
R40178-80	ERJ6GEYG472	M.RESISTOR CH 1/10W 4.7K	3	AG-DS850HP
R40181	ERJ6GEYJ563	M.RESISTOR CH 1/10W 56K	1	
R40182	ERJ6GEYJ104	M.RESISTOR CH 1/10W 100K	1	
R40183	ERJ6GEYJ154	M.RESISTOR CH 1/10W 150K	1	
R40184	ERJ6GEYJ152	M.RESISTOR CH 1/10W 1.5K	1	
R40185	ERJ6GEYJ151	M.RESISTOR CH 1/10W 150	1	
R40186	ERJ6GEYJ471	M.RESISTOR CH 1/10W 470	1	
R40187,88	ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	2	
R40189	ERJ6GEYJ104	M.RESISTOR CH 1/10W 100K	1	
R40190	ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	1	
R40191	ERJ6GEYJ222	M.RESISTOR CH 1/10W 2.2K	1	
R40192-99	ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	8	
R40200	ERJ6GEYJ102	M.RESISTOR CH 1/10W 1K	1	
R40201	ERJ6GEYJ223	M.RESISTOR CH 1/10W 22K	1	
R40202	ERJ6GEYJ563	M.RESISTOR CH 1/10W 56K	1	
R40203	ERJ6GEYG472	M.RESISTOR CH 1/10W 4.7K	1	
R40204	ERJ6GEYJ560	M.RESISTOR CH 1/10W 56	1	
R40205	ERJ6GEYJ222	M.RESISTOR CH 1/10W 2.2K	1	
R40206	ERJ6GEYJ561	M.RESISTOR CH 1/10W 560	1	
R40207	ERJ6GEYJ102	M.RESISTOR CH 1/10W 1K	1	
R40208	ERJ6GEYJ102	M.RESISTOR CH 1/10W 1K	1	AG-DS850HP
R40209,10	ERJ6GEYJ104	M.RESISTOR CH 1/10W 100K	2	AG-DS850HP
R40211	ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	1	AG-DS850HP
R40212-15	ERJ6GEYJ102	M.RESISTOR CH 1/10W 1K	4	AG-DS850HP
R40216,17	ERJ6GEYJ104	M.RESISTOR CH 1/10W 100K	2	AG-DS850HP
R40218	ERJ6GEYJ102	M.RESISTOR CH 1/10W 1K	1	AG-DS850HP
R40219,20	ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	2	AG-DS850HP
R40221	ERJ6GEYJ102	M.RESISTOR CH 1/10W 1K	1	AG-DS850HP
R40222	ERJ6GEYJ104	M.RESISTOR CH 1/10W 100K	1	AG-DS850HP
R40223	ERJ6GEYJ102	M.RESISTOR CH 1/10W 1K	1	AG-DS850HP
R40224-28	ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	5	AG-DS850HP
R40229	ERJ6GEYJ151	M.RESISTOR CH 1/10W 150	1	AG-DS850HP
R40230	ERJ6GEYJ102	M.RESISTOR CH 1/10W 1K	1	AG-DS850HP
R40231,32	ERJ6GEYJ104	M.RESISTOR CH 1/10W 100K	2	AG-DS850HP
R40233	ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	1	AG-DS850HP
R40234	ERJ6GEYJ104	M.RESISTOR CH 1/10W 100K	1	AG-DS850HP
R40235,36	ERJ6GEYJ102	M.RESISTOR CH 1/10W 1K	2	AG-DS850HP
R40237	ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	1	AG-DS850HP
R40240,41	ERJ6GEYJ104	M.RESISTOR CH 1/10W 100K	2	AG-DS850HP
R40242-46	ERJ6GEYJ223	M.RESISTOR CH 1/10W 22K	5	
R40250	ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	1	AG-DS850HP
R40251	ERJ6GEYG472	M.RESISTOR CH 1/10W 4.7K	1	AG-DS850HP
R40252,53	ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	2	AG-DS850HP
R40254	ERJ6GEYJ183	M.RESISTOR CH 1/10W 18K	1	AG-DS850HP
R40255	ERJ6GEYG333	M.RESISTOR CH 1/10W 33K	1	AG-DS850HP
R40256	ERJ6GEYG472	M.RESISTOR CH 1/10W 4.7K	1	AG-DS850HP
RY40001	VSY2074	RELAY	1	
RY40002	VSY2074	RELAY	1	AG-DS850HP
TL40001	VLT0146	TRANSFORMER	1	AG-DS850HP
TL40002	VLT0143	TRANSFORMER	1	AG-DS850HP
TL40003,4	VLT0145	TRANSFORMER	2	AG-DS850HP
TL40005	VLT0146	TRANSFORMER	1	AG-DS850HP
VR40002,3	EVN32CA00B23	V.RESISTOR 2K	2	

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
VR40004	EVN32CA00B15	V.RESISTOR 100K	1	AG-DS850HP
VR40005	EVN32CA00B53	V.RESISTOR 5K	1	AG-DS850HP
VR40007,8	EVN32CA00B23	V.RESISTOR 2K	2	
VR40009	EVN32CA00B15	V.RESISTOR 100K	1	AG-DS850HP
VR40010	EVN32CA00B53	V.RESISTOR 5K	1	AG-DS850HP
VR40011,2	EVN32CA00B23	V.RESISTOR 2K	2	AG-DS850HP
		MISCELLANEOUS		
E67	VSC3967	SHIELD CASE (UPPER)	1	
E68	VSC3968	SHIELD CASE (MIDDLE)	1	
E69	VSC3969	SHIELD CASE (LOWER)	1	
E71	VSC3971	SHIELD CASE (MIDDLE)	1	AG-DS850HP
E72	VSC3972	SHIELD CASE (LOWER,BIAS)	1	AG-DS850HP

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
	VEP04421A	P.C.BOARD W/COMPONENT		AG-DS850HP
		AUDIO (2)		
	VEP04421B	P.C.BOARD W/COMPONENT		AG-DS840HP
		AUDIO (2)		
C41001	ECEA1CGE471	E.CAPACITOR 16V 470U	1	
C41002	ECUM1H103ZFN	C.CAPACITOR 50V 0.01U	1	AG-DS850HP
C41003,04	ECEA1HGE3R3	E.CAPACITOR 50V 3.3U	2	
C41005	ECQB1H682JF	P.CAPACITOR 50V 6800P	1	
C41006	ECUM1H102JCN	C.CAPACITOR CH 50V 1000P	1	
C41007	ECQB1H223JF	P.CAPACITOR 50V 0.022U	1	
C41008	ECEA1HGE100	E.CAPACITOR 50V 10U	1	
C41009	ECEA1HGE4R7	E.CAPACITOR 50V 4.7U	1	
C41010	ECQB1H223JF	P.CAPACITOR 50V 0.022U	1	
C41011	ECEA1CGE470	E.CAPACITOR 16V 47U	1	
C41012	ECQB1H103JF	P.CAPACITOR 50V 0.01U	1	
C41013	ECQB1H332JF	P.CAPACITOR 50V 3300P	1	
C41014-16	ECUM1H102JCN	C.CAPACITOR CH 50V 1000P	3	
C41017	ECEA1HGE4R7	E.CAPACITOR 50V 4.7U	1	
C41018	ECUM1H104ZFN	C.CAPACITOR 50V 0.1U	1	
C41019	ECUM1H103ZFN	C.CAPACITOR 50V 0.01U	1	
C41020	ECEA1AGE101	E.CAPACITOR 10V 100U	1	
C41021,22	ECUM1H103ZFN	C.CAPACITOR 50V 0.01U	2	
C41023	ECEA1AGE101	E.CAPACITOR 10V 100U	1	
C41024	ECEA1CGE470	E.CAPACITOR 16V 47U	1	
C41025	ECQB1H104JF	P.CAPACITOR 50V 0.1U	1	
C41026	ECUM1H103ZFN	C.CAPACITOR 50V 0.01U	1	
C41027	ECUM1H102JCN	C.CAPACITOR CH 50V 1000P	1	
C41028	ECUM1H331JCN	C.CAPACITOR CH 50V 330P	1	
C41029	ECQB1H104JF	P.CAPACITOR 50V 0.1U	1	
C41030	ECEA1VGE330	E.CAPACITOR 35V 33U	1	
C41031	ECQV1H274JZ	P.CAPACITOR 50V 0.27U	1	
C41032,33	ECUM1H103ZFN	C.CAPACITOR 50V 0.01U	2	
C41034	ECEA1AGE101	E.CAPACITOR 10V 100U	1	
C41035-37	ECUM1H103ZFN	C.CAPACITOR 50V 0.01U	3	
C41038	ECUM1H101JCN	C.CAPACITOR CH 50V 100P	1	
C41039	ECUM1H103ZFN	C.CAPACITOR 50V 0.01U	1	
C41040	ECUM1H104ZFN	C.CAPACITOR 50V 0.1U	1	
C41041	ECEA1HGE4R7	E.CAPACITOR 50V 4.7U	1	
C41042-44	ECUM1H102JCN	C.CAPACITOR CH 50V 1000P	3	
C41045	ECQB1H332JF	P.CAPACITOR 50V 3300P	1	
C41046	ECQB1H103JF	P.CAPACITOR 50V 0.01U	1	
C41047	ECEA1CGE470	E.CAPACITOR 16V 47U	1	
C41048,49	ECQB1H223JF	P.CAPACITOR 50V 0.022U	2	
C41050	ECEA1HGE100	E.CAPACITOR 50V 10U	1	
C41051	ECUM1H102JCN	C.CAPACITOR CH 50V 1000P	1	
C41052	ECQB1H682JF	P.CAPACITOR 50V 6800P	1	
C41053,54	ECEA1EN4R7S	E.CAPACITOR 25V 4.7U	2	AG-DS850HP
C41055,56	ECEA1HGE100	E.CAPACITOR 50V 10U	2	
C41057	ECEA1CGE470	E.CAPACITOR 16V 47U	1	
C41058	ECEA1HGE220	E.CAPACITOR 50V 22U	1	
C41059	ECEA1CGE470	E.CAPACITOR 16V 47U	1	
C41060	ECEA1AGE101	E.CAPACITOR 10V 100U	1	
C41061	ECUM1H103ZFN	C.CAPACITOR 50V 0.01U	1	
C41062	ECEA1AGE101	E.CAPACITOR 10V 100U	1	AG-DS850HP
C41063,64	ECEA1HGE010	E.CAPACITOR 50V 1U	2	AG-DS850HP
C41065,66	ECEA1CGE470	E.CAPACITOR 16V 47U	2	
C41067,68	ECEA1CN100S	E.CAPACITOR 16V 10U	2	
C41069,70	ECEA1HGE4R7	E.CAPACITOR 50V 4.7U	2	
C41071	ECUM1H103ZFN	C.CAPACITOR 50V 0.01U	1	AG-DS850HP
C41072-73	ECEA1CGE470	E.CAPACITOR 16V 47U	3	
C41075	ECEA1AGE221	E.CAPACITOR 10V 220U	1	
C41076	ECEA1VGE330	E.CAPACITOR 35V 33U	1	AG-DS850HP
C41077	ECEA0JGE101	E.CAPACITOR 6.3V 100U	1	
C41078	ECUM1H100DCN	C.CAPACITOR CH 50V 10P	1	AG-DS850HP
C41079	ECEA1HGE100	E.CAPACITOR 50V 10U	1	AG-DS850HP
C41080	ECEA1CGE470	E.CAPACITOR 16V 47U	1	
C41081	ECUM1H102KBN	C.CAPACITOR CH 50V 1000P	1	AG-DS850HP
C41082	ECEA1CGE221	E.CAPACITOR 16V 220U	1	
C41083	ECEA1CN100S	E.CAPACITOR 16V 10U	1	AG-DS850HP
C41084	ECEA1CGE470	E.CAPACITOR 16V 47U	1	
C41085	ECQB1H222JF	P.CAPACITOR 50V 2200P	1	
C41086,87	ECEA1HGE100	E.CAPACITOR 50V 10U	2	

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
C41088	ECEA1CGE470	E.CAPACITOR 16V 47U	1	
C41089	ECEA1HGE100	E.CAPACITOR 50V 10U	1	
C41090	ECEA1CGE470	E.CAPACITOR 16V 47U	1	
C41091	ECUM1H101JCN	C.CAPACITOR CH 50V 100P	1	
C41092	ECEA1CGE470	E.CAPACITOR 16V 47U	1	
C41093	ECEA1HGE100	E.CAPACITOR 50V 10U	1	
C41094,95	ECEA1CGE470	E.CAPACITOR 16V 47U	2	
C41096	ECEA1CGE470	E.CAPACITOR 16V 47U	1	AG-DS850HP
C41097,98	ECUM1H103ZFN	C.CAPACITOR 50V 0.01U	2	AG-DS850HP
C41099	ECUM1H102JCN	C.CAPACITOR CH 50V 1000P	1	AG-DS850HP
C41100	ECUM1H120JCN	C.CAPACITOR CH 50V 12P	1	AG-DS850HP
C41101	ECUM1H103ZFN	C.CAPACITOR 50V 0.01U	1	AG-DS850HP
C41102,03	ECUM1H331JCN	C.CAPACITOR CH 50V 330P	2	AG-DS850HP
C41104	ECUM1H101JCN	C.CAPACITOR CH 50V 100P	1	AG-DS850HP
C41106-08	ECUM1H103ZFN	C.CAPACITOR 50V 0.01U	3	AG-DS850HP
C41109	ECEA1CGE470	E.CAPACITOR 16V 47U	1	AG-DS850HP
C41110,11	ECUM1H103ZFN	C.CAPACITOR 50V 0.01U	2	AG-DS850HP
C41112,13	ECUM1H331JCN	C.CAPACITOR CH 50V 330P	2	AG-DS850HP
C41114	ECUM1H101JCN	C.CAPACITOR CH 50V 100P	1	AG-DS850HP
C41116	ECEA1CGE101	E.CAPACITOR 16V 100U	1	
C41117	ECEA1CGE470	E.CAPACITOR 16V 47U	1	
C41118	ECEA1CGE101	E.CAPACITOR 16V 100U	1	
C41119	ECEA1CGE471	E.CAPACITOR 16V 470U	1	
C41120	ECEA1CGE470	E.CAPACITOR 16V 47U	1	AG-DS850HP
C41121	ECEA1HGE4R7	E.CAPACITOR 50V 4.7U	1	
C41122	ECEA1CGE470	E.CAPACITOR 16V 47U	1	
C41123	ECEA1HGE220	E.CAPACITOR 50V 22U	1	
C41124	ECEA1CGE101	E.CAPACITOR 16V 100U	1	
C41130	ECUM1H103ZFN	C.CAPACITOR 50V 0.01U	1	
D41001,02	1SS133	DIODE	2	<R>
D41007,08	MA4068M	DIODE	2	<R>
D41009	MA151K	DIODE	1	<R>AG-DS850HP
D41010,11	MA157	DIODE	2	<R>AG-DS850HP
D41012	MA3030	DIODE	2	<R>AG-DS850HP
D41013	MA3030	DIODE	2	<R>
D41014	MA3068	DIODE	1	<R>
D41015,16	MA151K	DIODE	2	<R>
D41017	MA153	DIODE	1	<R>
FL41001	VLF0696	FILTER	1	
IC41001	BA7705K1	IC	1	<R>
IC41002	AN78N05	IC	1	<R>
IC41003	AN3912	IC	1	<R>
IC41004	UPC4558G2	IC	1	<R>
IC41005	UPC393G2	IC	1	<R>
IC41006	MC14053BF	IC	1	<R>
IC41007	UPC4558G2	IC	1	<R>
IC41008	NJM2068MD	IC	1	<R>
IC41009	UPC4558G2	IC	1	<R>AG-DS850HP
IC41010-2	MC14053BF	IC	3	<R>
IC41013	UPC4558G2	IC	1	<R>
IC41014	MC14053BF	IC	1	<R>
IC41015	UPC4556G2	IC	1	<R>
IC41016,7	AN6558S	IC	2	<R>
L41001-03	VLQEL05S101J	COIL 100UH	3	
L41004-08	VLQEL06F102K	COIL 1000UH	5	
L41009,10	VLQEL05S101J	COIL 100UH	2	
L41011	VLQEL05S150J	COIL 15UH	1	
L41012	VLQEL05S101J	COIL 100UH	1	
P41001	VJP3078	CONNECTOR (MALE)	1	
P41002	VJP3529	CONNECTOR	1	AG-DS850HP

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
P41003	VJP3176B064	CONNECTOR (MALE) 64P	1	
Q41001	2SB709A-R	TRANSISTOR	1	<R>AG-DS850HP
Q41002,03	2SD1306	TRANSISTOR	2	<R>
Q41004	2SD636-R	TRANSISTOR	1	<R>AG-DS850HP
Q41005	XN1501	TRANSISTOR-TRANSISTOR	1	<R>AG-DS850HP
Q41006	MSD601-R	TRANSISTOR	1	<R>
Q41007	MSD601-R	TRANSISTOR	1	<R>AG-DS850HP
Q41008	2SD1306	TRANSISTOR	1	<R>
Q41009	2SD638	TRANSISTOR	1	<R>
Q41010	2SB643	TRANSISTOR	1	<R>
Q41011	2SD1306	TRANSISTOR	1	<R>AG-DS850HP
Q41012-14	MSD601-R	TRANSISTOR	3	<R>
Q41015	2SD1328-R	TRANSISTOR	1	<R>
Q41016	2SD602A	TRANSISTOR	1	<R>
Q41017,18	2SD1306	TRANSISTOR	2	<R>
Q41019,20	MSC2295-B	TRANSISTOR	2	<R>AG-DS850HP
Q41021	MSD601-R	TRANSISTOR	1	<R>AG-DS850HP
Q41022-24	2SD602A-R	TRANSISTOR	3	<R>AG-DS850HP
Q41025	2SB644	TRANSISTOR	1	<R>AG-DS850HP
Q41026	2SD639	TRANSISTOR	1	<R>AG-DS850HP
Q41027	2SC2404	TRANSISTOR	1	<R>AG-DS850HP
Q41028	MSD601-R	TRANSISTOR	1	<R>AG-DS850HP
Q41029,30	2SD602A-R	TRANSISTOR	2	<R>AG-DS850HP
Q41031	2SB644	TRANSISTOR	1	<R>AG-DS850HP
Q41032	2SD639	TRANSISTOR	1	<R>AG-DS850HP
Q41033	2SC2404	TRANSISTOR	1	<R>AG-DS850HP
Q41034	2SD602A-R	TRANSISTOR	1	<R>AG-DS850HP
Q41035	2SB793	TRANSISTOR	1	<R>AG-DS850HP
Q41036	2SB710	TRANSISTOR	1	<R>
Q41037	2SD1306	TRANSISTOR	1	<R>
Q41038,39	2SD1328-R	TRANSISTOR	2	<R>
Q41040	2SD1306	TRANSISTOR	1	<R>
Q41041,42	2SD1328-R	TRANSISTOR	2	<R>
Q41043	2SD1306	TRANSISTOR	1	<R>
Q41044,45	2SD1328-R	TRANSISTOR	2	<R>
Q41046	2SD1306	TRANSISTOR	1	<R>
Q41047,48	2SD1328-R	TRANSISTOR	2	<R>
Q41049	2SD601	TRANSISTOR	1	<R>
Q41050	2SD973	TRANSISTOR	1	<R>AG-DS850HP
Q41051,52	2SD1306	TRANSISTOR	2	<R>
Q41053	2SB709A-R	TRANSISTOR	1	<R>
Q41110,11	2SC1740SX	TRANSISTOR	2	<R>
QR41002,3	MRN2403	TRANSISTOR	2	<R>
QR41004	MRN1403	TRANSISTOR	1	<R>
QR41005	MRN1403	TRANSISTOR	1	<R>AG-DS850HP
QR41006,7	MRN1404	TRANSISTOR	2	<R>
QR41008	MRN1403	TRANSISTOR	1	<R>AG-DS850HP
QR41009	MRN2404	TRANSISTOR	1	<R>AG-DS850HP
QR41010,1	MRN1404	TRANSISTOR	2	<R>AG-DS850HP
QR41012	MRN1402	TRANSISTOR	1	<R>
R41001,02	ERJ6GEYJ562	M.RESISTOR CH 1/10W 5.6K	2	AG-DS850HP
R41003,04	ERJ6GEYJ102	M.RESISTOR CH 1/10W 1K	2	
R41005,06	ERJ6GEYJ473	M.RESISTOR CH 1/10W 47K	2	
R41007	ERJ6GEYJ225	M.RESISTOR CH 1/10W 2.2M	1	
R41008,09	ERJ6GEYJ331	M.RESISTOR CH 1/10W 330	2	
R41010,11	ERJ6GEYG821	M.RESISTOR CH 1/10W 820	2	
R41012	ERJ6GEYG681	M.RESISTOR CH 1/10W 680	1	
R41013	VRE0034E112	M.RESISTOR CH 1/10W 1.1K	1	
R41014	VRE0034E103	M.RESISTOR CH 1/10W 10K	1	
R41015	ERJ6GEYG183	M.RESISTOR CH 1/10W 18K	1	
R41016	ERJ6GEYG562	M.RESISTOR CH 1/10W 5.6K	1	
R41017	ERJ6GEYG104	M.RESISTOR CH 1/10W 100K	1	
R41018	ERJ6GEYG303	M.RESISTOR CH 1/10W 30K	1	
R41019	ERJ6GEYJ123	M.RESISTOR CH 1/10W 12K	1	
R41020	ERJ6GEYJ102	M.RESISTOR CH 1/10W 1K	1	
R41021	VRE0034E393	M.RESISTOR CH 1/10W 39K	1	

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
R41022	ERJ6GEYJ102	M.RESISTOR CH 1/10W 1K	1	
R41023,24	VRE0034E223	M.RESISTOR CH 1/10W 22K	2	
R41025	ERJ6GEYG163	M.RESISTOR CH 1/10W 16K	1	
R41026	ERJ6GEYJ105	M.RESISTOR CH 1/10W 1M	1	
R41027	ERJ6GEYJ102	M.RESISTOR CH 1/10W 1K	1	
R41028,29	ERJ6GEYJ473	M.RESISTOR CH 1/10W 47K	2	
R41030	ERJ6GEYJ102	M.RESISTOR CH 1/10W 1K	1	
R41031	ERJ6GEYJ563	M.RESISTOR CH 1/10W 56K	1	
R41032	ERJ6GEYJ182	M.RESISTOR CH 1/10W 1.8K	1	
R41033,34	ERJ6GEYJ152	M.RESISTOR CH 1/10W 1.5K	2	
R41035	ERJ6GEYJ182	M.RESISTOR CH 1/10W 1.8K	1	
R41036,37	ERJ6GEYJ562	M.RESISTOR CH 1/10W 5.6K	2	AG-DS850HP
R41038	ERJ6GEYJ181	M.RESISTOR CH 1/10W 180	1	
R41039	ERJ6GEYG103	M.RESISTOR CH 1/10W 10K	1	
R41040	ERJ6GEYG303	M.RESISTOR CH 1/10W 30K	1	
R41041	ERJ6GEYG104	M.RESISTOR CH 1/10W 100K	1	
R41042	ERJ6GEYG562	M.RESISTOR CH 1/10W 5.6K	1	
R41043	ERJ6GEYG183	M.RESISTOR CH 1/10W 18K	1	
R41044	VRE0034E103	M.RESISTOR CH 1/10W 10K	1	
R41045	VRE0034E112	M.RESISTOR CH 1/10W 1.1K	1	
R41046	ERJ6GEYG681	M.RESISTOR CH 1/10W 680	1	
R41047,48	ERJ6GEYG821	M.RESISTOR CH 1/10W 820	2	
R41049	ERJ6GEYJ104	M.RESISTOR CH 1/10W 100K	1	
R41050	ERJ6GEYJ182	M.RESISTOR CH 1/10W 1.8K	1	
R41051	ERJ6GEYJ821	M.RESISTOR CH 1/10W 820	1	
R41052	ERJ6GEYJ330	M.RESISTOR CH 1/10W 33	1	AG-DS850HP
R41053	ERJ6GEYJ102	M.RESISTOR CH 1/10W 1K	1	AG-DS850HP
R41054,55	ERJ6GEYJ223	M.RESISTOR CH 1/10W 22K	2	AG-DS850HP
R41056	ERJ6GEYJ682	M.RESISTOR CH 1/10W 6.8K	1	AG-DS850HP
R41057	ERJ6GEYJ332	M.RESISTOR CH 1/10W 3.3K	1	AG-DS850HP
R41058	ERJ6GEYJ222	M.RESISTOR CH 1/10W 2.2K	1	AG-DS850HP
R41059	ERJ6GEYJ822	M.RESISTOR CH 1/10W 8.2K	1	AG-DS850HP
R41062	ERJ6GEYJ392	M.RESISTOR CH 1/10W 3.9K	1	
R41063	ERJ6GEYJ332	M.RESISTOR CH 1/10W 3.3K	1	
R41064	ERJ6GEYJ392	M.RESISTOR CH 1/10W 3.9K	1	
R41065	ERJ6GEYJ332	M.RESISTOR CH 1/10W 3.3K	1	
R41066-71	ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	6	
R41072,73	ERJ6GEYJ561	M.RESISTOR CH 1/10W 560	2	
R41074	ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	1	
R41075,76	ERJ6GEYJ331	M.RESISTOR CH 1/10W 330	2	
R41077	ERJ6GEYJ102	M.RESISTOR CH 1/10W 1K	1	
R41078	ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	1	
R41079	ERJ6GEYJ562	M.RESISTOR CH 1/10W 5.6K	1	AG-DS850HP
R41080	ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	1	AG-DS850HP
R41081	ERJ6GEYJ105	M.RESISTOR CH 1/10W 1M	1	AG-DS850HP
R41082	ERJ6GEYJ102	M.RESISTOR CH 1/10W 1K	1	
R41083,84	ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	2	AG-DS850HP
R41085	ERJ6GEYJ222	M.RESISTOR CH 1/10W 2.2K	1	AG-DS850HP
R41086	ERJ6GEYJ104	M.RESISTOR CH 1/10W 100K	1	AG-DS850HP
R41087	ERJ6GEYJ102	M.RESISTOR CH 1/10W 1K	1	AG-DS850HP
R41088	ERJ6GEYJ182	M.RESISTOR CH 1/10W 1.8K	1	AG-DS850HP
R41089	ERJ6GEYJ272	M.RESISTOR CH 1/10W 2.7K	1	AG-DS850HP
R41090	ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	1	AG-DS850HP
R41091-94	ERJ6GEYJ102	M.RESISTOR CH 1/10W 1K	4	AG-DS850HP
R41095	ERJ6GEY0R00	M.RESISTOR CH 1/10W 0	1	AG-DS850HP
R41096	ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	1	AG-DS850HP
R41097	ERJ6GEYJ680	M.RESISTOR CH 1/10W 68	1	
R41098	ERJ6GEYJ104	M.RESISTOR CH 1/10W 100K	1	
R41099	ERJ6GEYJ102	M.RESISTOR CH 1/10W 1K	1	
R41100	VRE0034E302	M.RESISTOR CH 1/10W 3K	1	
R41101	ERJ6GEYJ562	M.RESISTOR CH 1/10W 5.6K	1	
R41102	ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	1	
R41103	ERJ6GEYJ473	M.RESISTOR CH 1/10W 47K	1	
R41104	ERJ6GEYJ102	M.RESISTOR CH 1/10W 1K	1	
R41105,06	ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	2	
R41107,08	ERJ6GEYJ104	M.RESISTOR CH 1/10W 100K	2	
R41109-11	ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	3	
R41112	ERJ6GEYJ222	M.RESISTOR CH 1/10W 2.2K	1	
R41113	ERJ6GEYJ334	M.RESISTOR CH 1/10W 330K	1	
R41115	ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	1	
R41116	ERJ6GEYJ221	M.RESISTOR CH 1/10W 220	1	
R41117	ERJ6GEYJ223	M.RESISTOR CH 1/10W 22K	1	
R41118	ERJ6GEYJ102	M.RESISTOR CH 1/10W 1K	1	
R41119	ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	1	
R41120	ERJ6GEY0R00	M.RESISTOR CH 1/10W 0	1	

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
R41121	ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	1	
R41122	ERJ6GEYJ391	M.RESISTOR CH 1/10W 390	1	
R41123	ERJ6GEYG472	M.RESISTOR CH 1/10W 4.7K	1	
R41124	ERJ6GEYJ123	M.RESISTOR CH 1/10W 12K	1	
R41125	ERJ6GEYG472	M.RESISTOR CH 1/10W 4.7K	1	
R41126	ERJ6GEYJ123	M.RESISTOR CH 1/10W 12K	1	
R41127,28	ERJ6GEYJ470	M.RESISTOR CH 1/10W 47	2	
R41129	ERJ6GEYJ561	M.RESISTOR CH 1/10W 560	1	
R41130	ERJ6GEYJ102	M.RESISTOR CH 1/10W 1K	1	
R41131	ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	1	
R41132,33	ERJ6GEYJ470	M.RESISTOR CH 1/10W 47	2	
R41134	ERJ6GEYJ561	M.RESISTOR CH 1/10W 560	1	
R41135	ERJ6GEYJ102	M.RESISTOR CH 1/10W 1K	1	
R41136	ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	1	
R41137	ERJ6GEYK1R0	M.RESISTOR CH 1/16W 1.0	1	AG-DS850HP
R41138	ERJ6GEYJ223	M.RESISTOR CH 1/10W 22K	1	AG-DS850HP
R41139	ERJ6GEYG333	M.RESISTOR CH 1/10W 33K	1	AG-DS850HP
R41140	ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	1	AG-DS850HP
R41141	ERJ6GEYJ272	M.RESISTOR CH 1/10W 2.7K	1	AG-DS850HP
R41142	ERJ6GEYJ123	M.RESISTOR CH 1/10W 12K	1	AG-DS850HP
R41143	ERJ6GEYJ223	M.RESISTOR CH 1/10W 22K	1	AG-DS850HP
R41144	ERJ6GEYG153	M.RESISTOR CH 1/10W 15K	1	AG-DS850HP
R41145	ERJ6GEYJ102	M.RESISTOR CH 1/10W 1K	1	AG-DS850HP
R41146	ERJ6GEYJ392	M.RESISTOR CH 1/10W 3.9K	1	AG-DS850HP
R41147	ERJ6GEYJ391	M.RESISTOR CH 1/10W 390	1	AG-DS850HP
R41148	ERJ6GEYJ562	M.RESISTOR CH 1/10W 5.6K	1	AG-DS850HP
R41149	ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	1	
R41150	ERJ6GEYJ222	M.RESISTOR CH 1/10W 2.2K	1	AG-DS850HP
R41151	ERJ6GEYJ331	M.RESISTOR CH 1/10W 330	1	AG-DS850HP
R41152	ERJ6GEYJ3R3	M.RESISTOR CH 1/10W 3.3	1	AG-DS850HP
R41153	ERJ6GEYJ122	M.RESISTOR CH 1/10W 1.2K	1	AG-DS850HP
R41154	ERJ6GEYJ3R3	M.RESISTOR CH 1/10W 3.3	1	AG-DS850HP
R41155,56	ERJ6GEYJ222	M.RESISTOR CH 1/10W 2.2K	2	AG-DS850HP
R41157	ERJ6GEYJ122	M.RESISTOR CH 1/10W 1.2K	1	AG-DS850HP
R41158	ERJ6GEYJ222	M.RESISTOR CH 1/10W 2.2K	1	AG-DS850HP
R41159,60	ERJ6GEYG153	M.RESISTOR CH 1/10W 15K	2	AG-DS850HP
R41161	ERJ6GEYJ222	M.RESISTOR CH 1/10W 2.2K	1	AG-DS850HP
R41162,63	ERJ6GEYJ270	M.RESISTOR CH 1/10W 27	2	AG-DS850HP
R41164	ERJ6GEYJ152	M.RESISTOR CH 1/10W 1.5K	1	AG-DS850HP
R41165	ERJ6GEYJ392	M.RESISTOR CH 1/10W 3.9K	1	AG-DS850HP
R41167	ERJ6GEYJ391	M.RESISTOR CH 1/10W 390	1	AG-DS850HP
R41168	ERJ6GEYJ562	M.RESISTOR CH 1/10W 5.6K	1	AG-DS850HP
R41169	ERJ6GEYJ222	M.RESISTOR CH 1/10W 2.2K	1	AG-DS850HP
R41170	ERJ6GEYJ331	M.RESISTOR CH 1/10W 330	1	AG-DS850HP
R41171	ERJ6GEYJ3R3	M.RESISTOR CH 1/10W 3.3	1	AG-DS850HP
R41172	ERJ6GEYJ122	M.RESISTOR CH 1/10W 1.2K	1	AG-DS850HP
R41173	ERJ6GEYJ222	M.RESISTOR CH 1/10W 2.2K	1	AG-DS850HP
R41174,75	ERJ6GEYG153	M.RESISTOR CH 1/10W 15K	2	AG-DS850HP
R41176	ERJ6GEYJ3R3	M.RESISTOR CH 1/10W 3.3	1	AG-DS850HP
R41177	ERJ6GEYJ122	M.RESISTOR CH 1/10W 1.2K	1	AG-DS850HP
R41178	ERJ6GEYJ222	M.RESISTOR CH 1/10W 2.2K	1	AG-DS850HP
R41179,80	ERJ6GEYJ270	M.RESISTOR CH 1/10W 27	2	AG-DS850HP
R41181,82	ERJ6GEYJ222	M.RESISTOR CH 1/10W 2.2K	2	AG-DS850HP
R41183	ERJ6GEYJ151	M.RESISTOR CH 1/10W 150	1	
R41184	ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	1	
R41185	ERJ6GEYJ182	M.RESISTOR CH 1/10W 1.8K	1	
R41186	ERJ6GEYJ822	M.RESISTOR CH 1/10W 8.2K	1	
R41187	ERJ6GEYJ151	M.RESISTOR CH 1/10W 150	1	
R41188	ERJ6GEYJ183	M.RESISTOR CH 1/10W 18K	1	
R41189	ERJ6GEYG472	M.RESISTOR CH 1/10W 4.7K	1	
R41190	ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	1	
R41191	ERJ6GEYJ152	M.RESISTOR CH 1/10W 1.5K	1	
R41192-94	ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	3	
R41195	ERJ6GEYJ182	M.RESISTOR CH 1/10W 1.8K	1	
R41196	ERJ6GEYJ822	M.RESISTOR CH 1/10W 8.2K	1	
R41197	ERJ6GEYJ183	M.RESISTOR CH 1/10W 18K	1	
R41198	ERJ6GEYG472	M.RESISTOR CH 1/10W 4.7K	1	
R41199	ERJ6GEYJ152	M.RESISTOR CH 1/10W 1.5K	1	
R41200-03	ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	4	
R41204	ERJ6GEYJ182	M.RESISTOR CH 1/10W 1.8K	1	
R41205	ERJ6GEYJ822	M.RESISTOR CH 1/10W 8.2K	1	
R41206	ERJ6GEYJ183	M.RESISTOR CH 1/10W 18K	1	
R41207	ERJ6GEYJ152	M.RESISTOR CH 1/10W 1.5K	1	
R41208	ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	1	
R41209	ERJ6GEYG472	M.RESISTOR CH 1/10W 4.7K	1	

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
R41210-12	ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	3	
R41213	ERJ6GEYJ182	M.RESISTOR CH 1/10W 1.8K	1	
R41214	ERJ6GEYJ822	M.RESISTOR CH 1/10W 8.2K	1	
R41215	ERJ6GEYJ183	M.RESISTOR CH 1/10W 18K	1	
R41216,17	ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	2	
R41218	ERJ6GEYG472	M.RESISTOR CH 1/10W 4.7K	1	
R41219	ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	1	
R41220	ERJ6GEYJ152	M.RESISTOR CH 1/10W 1.5K	1	
R41221	ERJ6GEYG222	M.RESISTOR CH 1/10W 2.2K	1	AG-DS850HP
R41222	ERJ6GEYG152	M.RESISTOR CH 1/10W 1.5K	1	AG-DS850HP
R41223	ERJ6GEYG222	M.RESISTOR CH 1/10W 2.2K	1	AG-DS850HP
R41224	ERJ6GEYG152	M.RESISTOR CH 1/10W 1.5K	1	AG-DS850HP
R41226	ERJ6GEYJ682	M.RESISTOR CH 1/10W 6.8K	1	AG-DS850HP
R41227	ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	1	AG-DS850HP
R41228,29	ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	2	
R41230	ERJ6GEYJ681	M.RESISTOR CH 1/10W 680	1	
R41231	ERJ6GEYJ273	M.RESISTOR CH 1/10W 27K	1	
R41232	ERJ6GEYJ104	M.RESISTOR CH 1/10W 100K	1	
R41233,34	ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	2	
R41235	ERJ6GEYJ563	M.RESISTOR CH 1/10W 56K	1	
R41236,37	ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	2	
R41252,53	ERJ6GEYJ273	M.RESISTOR CH 1/10W 27K	2	AG-DS850HP
R41254	ERJ6GEYJ821	M.RESISTOR CH 1/10W 820	1	
R41255	ERJ6GEYJ181	M.RESISTOR CH 1/10W 180	1	
R41256	ERJ6GEYJ102	M.RESISTOR CH 1/10W 1K	1	
R41257	ERJ6GEYJ152	M.RESISTOR CH 1/10W 1.5K	1	
R41258	ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	1	
R41259	ERJ6GEYJ223	M.RESISTOR CH 1/10W 22K	1	
R41260	ERJ6GEYJ821	M.RESISTOR CH 1/10W 820	1	
R41261	ERJ6GEYJ181	M.RESISTOR CH 1/10W 180	1	
R41262	ERJ6GEYJ102	M.RESISTOR CH 1/10W 1K	1	
R41263	ERJ6GEYJ152	M.RESISTOR CH 1/10W 1.5K	1	
R41264	ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	1	
R41265	ERJ6GEYJ223	M.RESISTOR CH 1/10W 22K	1	
SW41001	ESD145131	SWITCH	1	<R>
VR41001	EVN32CA00B24	V.RESISTOR 20K	1	
VR41002	EVMF6SA00B14	V.RESISTOR 10K	1	
VR41003	EVN32CA00B23	V.RESISTOR 2K	1	AG-DS850HP
VR41004	EVN32CA00B15	V.RESISTOR 100K	1	
VR41005	EVN32CA00B24	V.RESISTOR 20K	1	
VR41006	EVMF6SA00B14	V.RESISTOR 10K	1	
VR41007	EVN32CA00B14	V.RESISTOR 10K	1	AG-DS850HP
VR41008,9	EVN32CA00B23	V.RESISTOR 2K	2	AG-DS850HP
VR41012,3	EVN32CA00B23	V.RESISTOR 2K	2	
VR41014	EVN32CA00B53	V.RESISTOR 5K	1	
VR41015,6	EVN32CA00B23	V.RESISTOR 2K	2	AG-DS850HP

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
	VEP05162H	P.C.BOARD W/COMPONENT		AG-DS850HP
		HEAD AMP		
	VEP05162J	P.C.BOARD W/COMPONENT		AG-DS840HP
		HEAD AMP		
C5001	ECUM1H102KBN	C.CAPACITOR CH 50V 1000P	1	
C5002,03	ECUM1H103ZFN	C.CAPACITOR 50V 0.01U	2	
C5004	ECEA1HKA0R1	E.CAPACITOR 50V 0.1U	1	
C5005	ECUM1H102KBN	C.CAPACITOR CH 50V 1000P	1	
C5006-08	ECUM1H103ZFN	C.CAPACITOR 50V 0.01U	3	AG-DS850HP
C5009	ECUM1H182JN	C.CAPACITOR CH 50V 1800P	1	
C5010	ECUM1E104ZFN	C.CAPACITOR CH 25V 0.1U	1	
C5011	ECEA1CKA220	E.CAPACITOR 16V 22U	1	AG-DS850HP
C5012	ECUM1H473ZFN	C.CAPACITOR CH 50V 0.047U	1	AG-DS850HP
C5013	ECUM1H102KBN	C.CAPACITOR CH 50V 1000P	1	
C5014	ECEA0JKA470	E.CAPACITOR 6.3V 47U	1	
C5015	ECUM1E104ZFN	C.CAPACITOR CH 25V 0.1U	1	
C5016	ECEA1EKA4R7	E.CAPACITOR 25V 4.7U	1	
C5017	ECUM1H080DCN	C.CAPACITOR CH 50V 80P	1	
C5018,19	ECUM1E224ZFN	C.CAPACITOR CH 25V 0.22U	2	
C5020	ECEA1EKA4R7	E.CAPACITOR 25V 4.7U	1	
C5021	ECUM1H080DCN	C.CAPACITOR CH 50V 80P	1	
C5022	ECEA1EKA4R7	E.CAPACITOR 25V 4.7U	1	
C5023	ECUM1H020DCN	C.CAPACITOR CH 50V 2P	1	
C5024,25	ECUM1E104ZFN	C.CAPACITOR CH 25V 0.1U	2	
C5026	ECUM1H020DCN	C.CAPACITOR CH 50V 2P	1	
C5027	ECEA1EKA4R7	E.CAPACITOR 25V 4.7U	1	
C5028	ECUM1E104ZFN	C.CAPACITOR CH 25V 0.1U	1	
C5029	ECUM1H102KBN	C.CAPACITOR CH 50V 1000P	1	
C5030	ECUM1H103ZFN	C.CAPACITOR 50V 0.01U	1	AG-DS850HP
C5031	ECUM1H104ZFN	C.CAPACITOR 50V 0.1U	1	AG-DS850HP
C5032,33	ECUM1E104ZFN	C.CAPACITOR CH 25V 0.1U	2	
C5034	ECUM1H102KBN	C.CAPACITOR CH 50V 1000P	1	
C5035	ECEA0JKA470	E.CAPACITOR 6.3V 47U	1	
C5036	ECUM1H103ZFN	C.CAPACITOR 50V 0.01U	1	
C5037	ECUM1H103ZFN	C.CAPACITOR 50V 0.01U	1	
C5038	ECUM1H103ZFN	C.CAPACITOR 50V 0.01U	1	AG-DS850HP
C5039	ECUM1H103ZFN	C.CAPACITOR 50V 0.01U	1	
C5040	ECUM1H103ZFN	C.CAPACITOR 50V 0.01U	1	AG-DS850HP
C5042	ECEA1HKA010	E.CAPACITOR 50V 1U	1	
C5043	ECUM1H471JCN	C.CAPACITOR CH 50V 470P	1	
C5044,45	ECUM1H101JCN	C.CAPACITOR CH 50V 100P	2	
C5046	ECUM1H471JCN	C.CAPACITOR CH 50V 470P	1	
C5047	ECEA1HKA010	E.CAPACITOR 50V 1U	1	
C5048	ECUM1H472ZFN	C.CAPACITOR CH 50V 4700P	1	
C5056	ECUM1H103ZFN	C.CAPACITOR 50V 0.01U	1	AG-DS850HP
C5066	ECUM1E224ZFN	C.CAPACITOR CH 25V 0.22U	1	
D5001,02	MA151K	DIODE	2	<R>
D5004	MA151K	DIODE	1	<R>AG-DS850HP
IC5001	AN3334K	IC	1	<R>
IC5002	BA7740FS	IC	1	<R>
L5001	VLQ0460	COIL	1	
L5002	VLQ0460	COIL	1	AG-DS850HP
L5003	VLQ0460	COIL	1	
L5004	VLQ0460	COIL	1	AG-DS840HP
P5001	VJP3091	CONNECTOR (MALE)	1	
P5002	VJS2603	CONNECTOR (FEMALE)	1	
P5003	VJP3091	CONNECTOR (MALE)	1	

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
Q5001	MSB709-R	TRANSISTOR	1	<R>
Q5002	MSC2295-B	TRANSISTOR	1	<R>AG-DS850HP
Q5003	XN4504	TRANSISTOR-TRANSISTOR	1	<R>
Q5004	MSC2295-B	TRANSISTOR	1	<R>AG-DS850HP
Q5005	MSC2295-B	TRANSISTOR	1	<R>
QR5001	MRN1404	TRANSISTOR	1	<R>
R5001	ERJ6GEYG472	M.RESISTOR CH 1/10W 4.7K	1	
R5003	ERJ6GEY0R00	M.RESISTOR CH 1/10W 0	1	
R5004	ERJ6GEYJ101	M.RESISTOR CH 1/10W 100	1	
R5005	ERJ6GEYJ102	M.RESISTOR CH 1/10W 1K	1	
R5006	ERJ6GEYJ152	M.RESISTOR CH 1/10W 1.5K	1	
R5007	ERJ6GEYJ122	M.RESISTOR CH 1/10W 1.2K	1	
R5008	ERJ6GEYJ222	M.RESISTOR CH 1/10W 2.2K	1	AG-DS850HP
R5009	ERJ6GEYJ471	M.RESISTOR CH 1/10W 470	1	AG-DS850HP
R5010	ERJ6GEYK1R0	M.RESISTOR CH 1/16W 1.0	1	
R5011-14	ERJ6GEYJ182	M.RESISTOR CH 1/10W 1.8K	4	
R5015-18	ERJ6GEYJ100	M.RESISTOR CH 1/10W 10	4	
R5019	ERJ6GEYJ391	M.RESISTOR CH 1/10W 390	1	
R5020,21	ERJ6GEYJ332	M.RESISTOR CH 1/10W 3.3K	2	AG-DS850HP
R5022	ERJ6GEYJ152	M.RESISTOR CH 1/10W 1.5K	1	
R5026	ERJ6GEY0R00	M.RESISTOR CH 1/10W 0	1	
R5027	ERJ6GEYG333	M.RESISTOR CH 1/10W 33K	1	
R5028	ERJ6GEYG243	M.RESISTOR CH 1/10W 24K	1	
R5029	ERJ6GEYG273	M.RESISTOR CH 1/10W 27K	1	
R5030	ERJ6GEYJ391	M.RESISTOR CH 1/10W 390	1	
R5031	ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	1	
R5032	ERJ6GEYJ473	M.RESISTOR CH 1/10W 47K	1	
R5033	ERJ6GEYJ273	M.RESISTOR CH 1/10W 27K	1	AG-DS850HP
R5034	ERJ6GEYG153	M.RESISTOR CH 1/10W 15K	1	
R5036	ERJ6GEYJ332	M.RESISTOR CH 1/10W 3.3K	1	
R5037,38	ERJ6GEYJ152	M.RESISTOR CH 1/10W 1.5K	2	
R5039	ERJ6GEYJ332	M.RESISTOR CH 1/10W 3.3K	1	
R5040	ERDS2TJ221	C.RESISTOR 1/4W 220	1	AG-DS850HP
R5041	ERJ6GEYJ100	M.RESISTOR CH 1/10W 10	1	AG-DS850HP
R5041	ERJ6GEYJ180	M.RESISTOR CH 1/10W 18	1	AG-DS840HP
R5042,43	ERJ6GEYJ100	M.RESISTOR CH 1/10W 10	2	
R5044,45	ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	2	
R5046,47	ERJ6GEY0R00	M.RESISTOR CH 1/10W 0	2	
R5058	ERJ6GEY0R00	M.RESISTOR CH 1/10W 0	1	AG-DS850HP
R5059	ERJ6GEYJ473	M.RESISTOR CH 1/10W 47K	1	
R5061	ERJ6GEY0R00	M.RESISTOR CH 1/10W 0	1	AG-DS850HP
R5062	ERDS2TJ221	C.RESISTOR 1/4W 220	1	AG-DS850HP
R5070	ERJ6GEY0R00	M.RESISTOR CH 1/10W 0	1	AG-DS850HP
VR5001,02	EVN32CA00B23	V.RESISTOR 2K	2	AG-DS850HP
		MISCELLANEOUS		
E64	VSC3119	SHIELD COVER (MIDDLE)	1	
E65	VSC3039	SHIELD COVER (FRONT)	1	
E66	VSC3040	SHIELD COVER (REAR)	1	

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
	VEP06902B	P.C.BOARD W/COMPONENT		AG-DS850HP
		FRONT		
	VEP06902D	P.C.BOARD W/COMPONENT		AG-DS840HP
		FRONT		
	VEP06929A	P.C.BOARD W/COMPONENT		AG-DS850HP
		FRONT LED		FOR VEP06902B
	VEP06929B	P.C.BOARD W/COMPONENT		AG-DS840HP
		FRONT LED		FOR VEP06902D
	VEP06962A	P.C.BOARD W/COMPONENT		AG-DS850HP
		KEY BOARD		FOR VEP06902B
	VEP06962B	P.C.BOARD W/COMPONENT		AG-DS840HP
		KEY BOARD		FOR VEP06902D
C62002	ECEA1CKS470	E.CAPACITOR 16V 47U	1	
C62003	ECEA1AKS221	E.CAPACITOR 10V 220U	1	
C62004,05	ECEA1HKS220	E.CAPACITOR 50V 22U	2	
C62007	ECUM1H102KBN	C.CAPACITOR CH 50V 1000P	1	
C62008-10	ECUM1H101JCN	C.CAPACITOR CH 50V 100P	3	
C62011	ECEA1CKS330	E.CAPACITOR 16V 33U	1	
C62012	ECUM1H101JCN	C.CAPACITOR CH 50V 100P	1	
C62013	ECEA1AKS221	E.CAPACITOR 10V 220U	1	
C62014	ECUM1H103ZFN	C.CAPACITOR 50V 0.01U	1	
C62015,16	ECUM1H220JCN	C.CAPACITOR CH 50V 22P	2	
D62002	MA4056-M	DIODE	1	<R>
D62013-16	MA151K	DIODE	4	<R>
D62018-22	MA151K	DIODE	5	<R>
D62023-28	MA153	DIODE	6	<R>
D62029-31	MA152K	DIODE	3	<R>
D62032-35	MA151K	DIODE	4	<R>
D62036	MA701A	DIODE	1	<R>
D62047	MA152K	DIODE	1	<R>
D62048-50	MA151K	DIODE	3	<R>
D62701-09	MA165VT	DIODE	9	<R>
DP62001	VSL0312	DISPLAY	1	
IC62001	UPD75236J025	IC	1	<R>
IC62002	UPC393G2	IC	1	<R>
IC62003	MN1382-R	IC	1	<R>
J62005	ERJ6GEY0R00	M.RESISTOR CH 1/10W 0	1	
J62007	ERJ6GEY0R00	M.RESISTOR CH 1/10W 0	1	
L62001	VLQEL05K121K	COIL	1	
LD62010,1	LN31GCPHLG4	COIL	2	
P62001-04	VJP3503	CONNECTOR	4	
P62005	VJP1236T	CONNECTOR (MALE) 9P	1	
P62006	VJS2949B010	CONNECTOR (FEMALE) 10P	1	
P62007	VJP3076	CONNECTOR	1	
P62008	VJP3093	CONNECTOR (MALE)	1	AG-DS850HP
P62008	VJP3530	CONNECTOR (MALE)	1	AG-DS840HP
P62009	VJS2889A018	CONNECTOR	1	
P62501	VJS2949B010	CONNECTOR (FEMALE) 10P	1	
P62701	VJS2949B018	CONNECTOR	1	

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
Q62002-05	MSD601-R	TRANSISTOR	4	<R>
Q62006-08	MSB710-R	TRANSISTOR	3	<R>
Q62009	MSB710-R	TRANSISTOR	1	<R>AG-DS850HP
QR62001	MRN1404	TRANSISTOR	1	<R>
R62001	ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	1	
R62003	ERJ6GEYJ104	M.RESISTOR CH 1/10W 100K	1	
R62004-11	ERJ6GEYJ473	M.RESISTOR CH 1/10W 47K	8	
R62012-19	ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	8	
R62020-24	ERJ6GEYJ223	M.RESISTOR CH 1/10W 22K	5	
R62025	ERJ6GEYJ471	M.RESISTOR CH 1/10W 470	1	
R62026-36	ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	11	
R62037-40	ERJ6GEYJ223	M.RESISTOR CH 1/10W 22K	4	
R62041	ERJ6GEYJ392	M.RESISTOR CH 1/10W 3.9K	1	
R62042-52	ERJ6GEYJ473	M.RESISTOR CH 1/10W 47K	11	
R62059	ERJ6GEYJ102	M.RESISTOR CH 1/10W 1K	1	
R62070,71	ERJ14YJ330	M.RESISTOR CH 1/4W 33	2	
R62076-79	ERJ6GEYJ332	M.RESISTOR CH 1/10W 3.3K	4	
R62080	ERJ6GEYJ104	M.RESISTOR CH 1/10W 100K	1	
R62081	ERJ6GEYJ332	M.RESISTOR CH 1/10W 3.3K	1	
R62082	ERJ6GEYJ104	M.RESISTOR CH 1/10W 100K	1	
R62083	ERJ6GEYJ332	M.RESISTOR CH 1/10W 3.3K	1	
R62084	ERJ6GEYJ104	M.RESISTOR CH 1/10W 100K	1	
R62085	ERJ6GEYJ332	M.RESISTOR CH 1/10W 3.3K	1	
R62086	ERJ6GEYJ104	M.RESISTOR CH 1/10W 100K	1	AG-DS850HP
R62087	ERJ6GEYJ102	M.RESISTOR CH 1/10W 1K	1	AG-DS850HP
R62088,89	ERJ6GEYG472	M.RESISTOR CH 1/10W 4.7K	2	
R62090	ERJ6GEYJ564	M.RESISTOR CH 1/10W 560K	1	
R62091	ERJ6GEYJ681	M.RESISTOR CH 1/10W 680	1	
R62092,93	ERJ6GEYJ683	M.RESISTOR CH 1/10W 68K	2	
R62094	ERJ6GEYJ564	M.RESISTOR CH 1/10W 560K	1	
R62095,96	ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	2	
R62097-01	ERJ6GEYJ223	M.RESISTOR CH 1/10W 22K	5	
R62102,03	ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	2	
R62104	ERJ14YJ470	M.RESISTOR CH 1/4W 47	1	AG-DS850HP
R62105-07	ERJ14YJ330	M.RESISTOR CH 1/4W 33	3	AG-DS850HP
R62108	ERJ6GEYJ473	M.RESISTOR CH 1/10W 47K	1	
R62109	ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	1	
R62110-12	ERJ6GEYJ223	M.RESISTOR CH 1/10W 22K	3	
R62701-03	ERDS2TJ560	C.RESISTOR 1/4W 56	3	
R62704	ERDS2TJ470	C.RESISTOR 1/4W 47	1	
R62705-09	ERDS2TJ560	C.RESISTOR 1/4W 56	5	
SW62010-3	EVQQJ104K	SWITCH	4	<>
SW62014,5	VSS0225	SWITCH	2	<>
SW62016-8	VSS0324	SWITCH	3	<>
SW62019,0	VSS0225	SWITCH	2	<>
SW62021	VSS0324	SWITCH	1	<>
SW62022,3	VSS0225	SWITCH	2	<>
SW62501	VSP0151	SWITCH	1	<>
SW62502-4	VSP0780	SWITCH	3	<>
SW62701	VSP0791	SWITCH	1	<>
SW62702	VSP0792	SWITCH	1	<>
SW62703	VSP0788	SWITCH	1	<>
SW62704	VSP0794	SWITCH	1	<>
SW62705	VSP0790	SWITCH	1	<>
SW62706	VSP0793	SWITCH	1	<>
SW62707	VSP0795	SWITCH	1	<>
SW62708	VSP0789	SWITCH	1	<>
SW62709	VSP0795	SWITCH	1	<>
X62001	VSX0140	CRYSTAL OSCILLATOR	1	<>

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
		MISCELLANEOUS		
E43	VMX0985	SPACER	1	
E73	VJF0960	DISPLAY TUBE HOLDER	1	
E74	VMX2062	LED SPACER	2	
E76	VMS4950	P.C.BOARD SUPPORT	2	
E79	XYN26+C5FR	SCREW	14	
E77	VWJ10SW050L0	FLAT CABLE	1	
E78	VWJ18XW040L1	FLEXIBLE WIRE	1	
E75	VMS5528	P.C.B. SUPPORT	5	
	VGF0506	SHIELD SHEET	1	AG-DS850HP
	VKC0295	BOARD SPACER	1	

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
	VEP06904A	P.C.BOARD W/COMPONENT		AG-DS850HP
		SERVO & SYSTEM CONTROL		
	VEP06904B	P.C.BOARD W/COMPONENT		AG-DS840HP
		SERVO & SYSTEM CONTROL		
C1501	ECEA1VGE220	E.CAPACITOR 35V 220U	1	
C1502	ECQV1H104JZ	P.CAPACITOR 50V 0.1U	1	
C1503	ECEA1DPS681	E.CAPACITOR 20V 680U	1	
C1504	ECQV1H104JZ	P.CAPACITOR 50V 0.1U	1	
C1505	ECEA1AGE221	E.CAPACITOR 10V 220U	1	
C1506	ECEA1CU101	E.CAPACITOR 16V 100U	1	
C1507	ECUM1H103ZFN	C.CAPACITOR 50V 0.01U	1	
C1508	ECQV1H104JZ	P.CAPACITOR 50V 0.1U	1	
C1509,10	ECEA1CU101	E.CAPACITOR 16V 100U	2	
C1511	ECEA1HU4R7	E.CAPACITOR 50V 4.7U	1	
C1512	ECEA1CU101	E.CAPACITOR 16V 100U	1	
C1513	ECQB1H103JF	P.CAPACITOR 50V 0.01U	1	
C1514	ECQB1H473JF	P.CAPACITOR 50V 0.047U	1	
C1515	ECUM1H223KBN	C.CAPACITOR CH 50V 0.022U	1	
C1517	ECEA1AU221	E.CAPACITOR 10V 220U	1	
C1518	ECEA1VU100	E.CAPACITOR 35V 10U	1	
C1519	ECEA1EGE470	E.CAPACITOR 25V 47U	1	
C1520	ECEA1EGE221	E.CAPACITOR 25V 220U	1	
C1521	ECEA1EGE470	E.CAPACITOR 25V 47U	1	
C1522	ECEA1CGE102	E.CAPACITOR 16V 1000U	1	
C1523	ECEA1EGE470	E.CAPACITOR 25V 47U	1	
C1524	ECEA1EGE221	E.CAPACITOR 25V 220U	1	
C1525	ECEA1AGE101	E.CAPACITOR 10V 100U	1	
C1526	ECEA1AGE471	E.CAPACOTOR 10V 47U	1	
C1527	ECEA1EGE221	E.CAPACITOR 25V 220U	1	
C1529	ECEA1EGE471	E.CAPACITOR 25V 470U	1	
C1530	ECEA1VGE220	E.CAPACITOR 35V 220U	1	
C1531	ECA0JFQ102	E.CAPACITOR 6.3V 1000U	1	
C1532	ECEA1AGE221	E.CAPACITOR 10V 220U	1	
C1533	ECUM1H103ZFN	C.CAPACITOR 50V 0.01U	1	
C1534	ECEA1EGE221	E.CAPACITOR 25V 220U	1	
C1541	ECEA1AGE101	E.CAPACITOR 10V 100U	1	
C1542	ECUM1H103ZFN	C.CAPACITOR 50V 0.01U	1	
C2001	ECEA0JU470	E.CAPACITOR 6.3V 47U	1	
C2002	ECUM1H150JCN	C.CAPACITOR CH 50V 15P	1	
C2003	ECUM1H181JCN	C.CAPACITOR CH 50V 180P	1	
C2004	ECUM1H101JCN	C.CAPACITOR CH 50V 100P	1	
C2005	ECUM1H103ZFN	C.CAPACITOR 50V 0.01U	1	
C2006	ECUM1E104ZFN	C.CAPACITOR CH 25V 0.1U	1	
C2007	ECEA1AU330	E.CAPACITOR 10V 33U	1	
C2008	ECQB1H683JF	P.CAPACITOR 50V 0.068U	1	
C2009	ECUM1H103ZFN	C.CAPACITOR 50V 0.01U	1	
C2010	ECEA0JU470	E.CAPACITOR 6.3V 47U	1	
C2011	ECEA1AU220	E.CAPACITOR 10V 22U	1	
C2012	ECEA1CU470	E.CAPACITOR 16V 47U	1	
C2013-15	ECUM1H103ZFN	C.CAPACITOR 50V 0.01U	3	
C2016,17	ECEA0JU470	E.CAPACITOR 6.3V 47U	2	
C2018	ECUM1H103ZFN	C.CAPACITOR 50V 0.01U	1	
C2019	ECEA0JU470	E.CAPACITOR 6.3V 47U	1	
C2020	ECUM1H103ZFN	C.CAPACITOR 50V 0.01U	1	
C2021	ECQB1H152JF	P.CAPACITOR 50V 1500P	1	
C2022	ECUM1H103ZFN	C.CAPACITOR 50V 0.01U	1	
C2023	ECQV1H184JZ	P.CAPACITOR 50V 0.18U	1	
C2024	ECUM1H102JN	C.CAPACITOR CH 50V 1000P	1	AG-DS850HP
C2025	ECUM1H103ZFN	C.CAPACITOR 50V 0.01U	1	
C2026	ECEA1HU010	E.CAPACITOR 50V 1U	1	AG-DS850HP
C2027	ECEA0JU470	E.CAPACITOR 6.3V 47U	1	
C2028	ECUM1H103ZFN	C.CAPACITOR 50V 0.01U	1	
C2029,30	ECUM1H220JCN	C.CAPACITOR CH 50V 22P	2	
C2031	ECUM1H100DCN	C.CAPACITOR CH 50V 10P	1	
C2032	ECEA0JU470	E.CAPACITOR 6.3V 47U	1	
C2033,34	ECEA1CU100	E.CAPACITOR 16V 10U	2	
C2035	ECEA1HUR47	E.CAPACITOR 50V 0.47U	1	
C2041	ECUM1H121JCN	C.CAPACITOR CH 50V 120P	1	
C2044,45	ECUM1H271JCN	C.CAPACITOR CH 50V 270P	2	
C2046	ECEA1HUR47	E.CAPACITOR 50V 0.47U	1	AG-DS850HP
C2047	ECUM1E104ZFN	C.CAPACITOR CH 25V 0.1U	1	
C2050,51	ECUM1H103ZFN	C.CAPACITOR 50V 0.01U	2	

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
C2052	ECUM1H102JCN	C.CAPACITOR CH 50V 1000P	1	
C2201	ECEA0JGE470	E.CAPACITOR 6.3V 47U	1	
C2202,03	ECUM1H103ZFN	C.CAPACITOR 50V 0.01U	2	
C2204,05	ECUM1H220JCN	C.CAPACITOR CH 50V 22P	2	
C2206	ECEA0JU470	E.CAPACITOR 6.3V 47U	1	
C2207,08	ECUM1H103ZFN	C.CAPACITOR 50V 0.01U	2	
C2209,10	ECUM1H220JCN	C.CAPACITOR CH 50V 22P	2	
C2214	ECUM1H101JCN	C.CAPACITOR CH 50V 100P	1	
C2215	ECUM1H103ZFN	C.CAPACITOR 50V 0.01U	1	
C2216	ECEA0JU470	E.CAPACITOR 6.3V 47U	1	
C2217,18	ECUM1H103ZFN	C.CAPACITOR 50V 0.01U	2	
C2219	ECEA0JU470	E.CAPACITOR 6.3V 47U	1	
C2220,21	ECUM1H103ZFN	C.CAPACITOR 50V 0.01U	2	
C2222	ECEA0JU470	E.CAPACITOR 6.3V 47U	1	
C2223,24	ECUM1H103ZFN	C.CAPACITOR 50V 0.01U	2	
C2225	ECEA0JU470	E.CAPACITOR 6.3V 47U	1	
C2226	ECUM1H103ZFN	C.CAPACITOR 50V 0.01U	1	
C2227	ECEA0JU470	E.CAPACITOR 6.3V 47U	1	
C2228-30	ECUM1H103ZFN	C.CAPACITOR 50V 0.01U	3	
C2231	ECEA0JU470	E.CAPACITOR 6.3V 47U	1	
C2232-34	ECUM1H103ZFN	C.CAPACITOR 50V 0.01U	3	
C2235	ECUM1H820JCN	C.CAPACITOR CH 50V 82P	1	
C2236	ECQB1H333JF	P.CAPACITOR 50V 0.033U	1	
C2237,38	ECEA0JU470	E.CAPACITOR 6.3V 47U	2	
C2239-41	ECUM1H103ZFN	C.CAPACITOR 50V 0.01U	3	
C2243	ECUM1H103ZFN	C.CAPACITOR 50V 0.01U	1	
C2244	ECEA1CU100	E.CAPACITOR 16V 10U	1	
C2245-47	ECUM1H103ZFN	C.CAPACITOR 50V 0.01U	3	
C2318,19	ECEA0JU470	E.CAPACITOR 6.3V 47U	2	
C2320	ECUM1H222KBN	C.CAPACITOR CH 50V 2200P	1	
C2321	ECUM1H103ZFN	C.CAPACITOR 50V 0.01U	1	
C2322	ECEA1HN4R7S	E.CAPACITOR 50V 4.7U	1	
C2323	ECUM1H561JCN	C.CAPACITOR CH 50V 560P	1	
C2327,28	ECEA0JU470	E.CAPACITOR 6.3V 47U	2	
C2330	ECQP1H103JZ	P.CAPACITOR 50V 0.01U	1	
C2331	ECQB1H104JF	P.CAPACITOR 50V 0.1U	1	
C2335,36	ECEA0JU470	E.CAPACITOR 6.3V 47U	2	
C2338	ECQB1H103JF	P.CAPACITOR 50V 0.01U	1	
C2339	ECUM1H331JCN	C.CAPACITOR CH 50V 330P	1	
C2340-42	ECUM1H103ZFN	C.CAPACITOR 50V 0.01U	3	
C2343,44	ECUM1H103ZFN	C.CAPACITOR 50V 0.01U	2	AG-DS850HP
C2350	ECEA1CU470	E.CAPACITOR 16V 47U	1	AG-DS850HP
C2351	ECUM1H103ZFN	C.CAPACITOR 50V 0.01U	1	AG-DS850HP
C2352,53	ECEA1CU470	E.CAPACITOR 16V 47U	2	AG-DS850HP
C2354	ECUM1H103ZFN	C.CAPACITOR 50V 0.01U	1	AG-DS850HP
C2355	ECEA1HU010	E.CAPACITOR 50V 1U	1	AG-DS850HP
C2401,02	ECUM1H103ZFN	C.CAPACITOR 50V 0.01U	2	
C2403	ECEA1CU470	E.CAPACITOR 16V 47U	1	
C2404,05	ECUM1H330JCN	C.CAPACITOR CH 50V 33P	2	
C2406-09	ECUM1H103ZFN	C.CAPACITOR 50V 0.01U	4	
C2410	ECEA0JU470	E.CAPACITOR 6.3V 47U	1	
C2501	ECQB1H473JF	P.CAPACITOR 50V 0.047U	1	
C2502	ECQB1H222JF	P.CAPACITOR 50V 2200P	1	
C2503	ECQB1H273JF	P.CAPACITOR 50V 0.027U	1	
C2504	ECQB1H222JF	P.CAPACITOR 50V 2200P	1	
C2510	ECEA1CU470	E.CAPACITOR 16V 47U	1	
C2512-14	ECUM1H103ZFN	C.CAPACITOR 50V 0.01U	3	
C2516-19	ECUM1H103ZFN	C.CAPACITOR 50V 0.01U	4	
C2701	ECEA1CU101	E.CAPACITOR 16V 100U	1	
C2702	ECUM1H820JCN	C.CAPACITOR CH 50V 82P	1	
C2703	ECUM1H561JCN	C.CAPACITOR CH 50V 560P	1	
C2704	ECUM1H271JCN	C.CAPACITOR CH 50V 270P	1	
C2705	ECEA1HU010	E.CAPACITOR 50V 1U	1	
C2709	ECEA1HU010	E.CAPACITOR 50V 1U	1	
C2710	ECUM1H103ZFN	C.CAPACITOR 50V 0.01U	1	
C2711	ECQB1H222JF	P.CAPACITOR 50V 2200P	1	
C2712	ECEA1EU221	E.CAPACITOR 25V 220U	1	
C2714	ECQV1H474JZ	P.CAPACITOR 50V 0.47U	1	
C2716,17	ECEA1EU101	E.CAPACITOR 25V 100U	2	
C2718	ECQV1H474JZ	P.CAPACITOR 50V 0.47U	1	
C2722	ECUM1H102JN	C.CAPACITOR CH 50V 1000P	1	
C2723	ECEA1EU221	E.CAPACITOR 25V 220U	1	
C2724	ECUM1H102JN	C.CAPACITOR CH 50V 1000P	1	
C2725	ECEA1EU221	E.CAPACITOR 25V 220U	1	
C2726	ECEA0JU470	E.CAPACITOR 6.3V 47U	1	

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
C2727-30	ECQV1H104JZ	P.CAPACITOR 50V 0.1U	4	
C2731-33	ECEA1HN4R7S	E.CAPACITOR 50V 4.7U	3	
C2734	ECQB1H473JF	P.CAPACITOR 50V 0.047U	1	
C2735	ECEA0JU470	E.CAPACITOR 6.3V 47U	1	
C2736	ECQB1H683JF	P.CAPACITOR 50V 0.068U	1	
C2737	ECUM1H103ZFN	C.CAPACITOR 50V 0.01U	1	
C2738	ECEA1CU470	E.CAPACITOR 16V 47U	1	
C2739	ECEA0JU470	E.CAPACITOR 6.3V 47U	1	
C2740	ECEA1EU470	E.CAPACITOR 25V 47U	1	
C2741	ECUM1H333KBN	C.CAPACITOR CH 50V 0.033U	1	
C2742	ECQB1H104JF	P.CAPACITOR 50V 0.1U	1	
C2744-46	ECEA1HU2R2	E.CAPACITOR 50V 2.2U	3	
C2747-50	ECUM1H333KBN	C.CAPACITOR CH 50V 0.033U	4	
C2751-53	ECUM1H103ZFN	C.CAPACITOR 50V 0.01U	3	
C2754	ECEA0JU470	E.CAPACITOR 6.3V 47U	1	
C2755-57	ECUM1H102JN	C.CAPACITOR CH 50V 1000P	3	
C2758	ECEA1HNR47S	E.CAPACITOR 50V 0.47U	1	
C2759	ECUM1H221JCN	C.CAPACITOR CH 50V 220P	1	
C2760	ECEA1HN2R2S	E.CAPACITOR 50V 2.2U	1	
C2761	ECUM1H101JCN	C.CAPACITOR CH 50V 100P	1	
C2762	ECEA1HU2R2	E.CAPACITOR 50V 2.2U	1	
C2763	ECEA0JU470	E.CAPACITOR 6.3V 47U	1	
C2764	ECEA0JU220	E.CAPACITOR 6.3V 22U	1	
C2765	ECUM1H221JCN	C.CAPACITOR CH 50V 220P	1	
C2766	ECEA1HN2R2S	E.CAPACITOR 50V 2.2U	1	
C2767	ECUM1H101JCN	C.CAPACITOR CH 50V 100P	1	
C2768	ECEA1HU2R2	E.CAPACITOR 50V 2.2U	1	
C2769,70	ECUM1H102JN	C.CAPACITOR CH 50V 1000P	2	
C2793	ECEA1HU4R7	E.CAPACITOR 50V 4.7U	1	
C2804,05	ECEA1EU472	E.CAPACITOR 25V 4700U	2	
C2806	ECEA1HU4R7	E.CAPACITOR 50V 4.7U	1	
C60001	ECUM1H103ZFN	C.CAPACITOR 50V 0.01U	1	
C60002,03	ECEA1CU102	E.CAPACITOR 16V 1000U	2	
C60005	ECEA0JU332	E.CAPACITOR 6.3V 3300U	1	
C60006	ECUM1H103ZFN	C.CAPACITOR 50V 0.01U	1	
C60007	ECEA1HU010	E.CAPACITOR 50V 1U	1	
C60008	ECEA0JU470	E.CAPACITOR 6.3V 47U	1	
C60009	ECEA0JU332	E.CAPACITOR 6.3V 3300U	1	
C60010	ECQB1H333JF	P.CAPACITOR 50V 0.033U	1	AG-DS850HP
C60011	ECQB1H472JF	P.CAPACITOR 50V 4700P	1	AG-DS850HP
C60012	ECQB1H103JF	P.CAPACITOR 50V 0.01U	1	AG-DS850HP
C60013	ECEA1CU100	E.CAPACITOR 16V 10U	1	AG-DS850HP
C60016	ECUM1H221JCN	C.CAPACITOR CH 50V 220P	1	
C60017	ECUM1H103ZFN	C.CAPACITOR 50V 0.01U	1	AG-DS850HP
C60018,19	ECUM1H330JCN	C.CAPACITOR CH 50V 33P	2	
C60020	ECEA1HU010	E.CAPACITOR 50V 1U	1	
C60021	ECEA1HU4R7	E.CAPACITOR 50V 4.7U	1	
C60022	ECEA1AU220	E.CAPACITOR 10V 22U	1	
C60023	ECUM1E104ZFN	C.CAPACITOR CH 25V 0.1U	1	
C60024	ECEA0JU682	E.CAPACITOR 6.3V 6800U	1	
C60026	ECUM1E104ZFN	C.CAPACITOR CH 25V 0.1U	1	
C60027	ECUM1H103ZFN	C.CAPACITOR 50V 0.01U	1	
C60101	ECUM1H103ZFN	C.CAPACITOR 50V 0.01U	1	
C60102	ECEA1CU470	E.CAPACITOR 16V 47U	1	
C60103-06	ECQB1H102JF	P.CAPACITOR 50V 1000P	4	
C60107	ECUM1H151JCN	C.CAPACITOR CH 50V 150P	1	
C60108	ECEA1CU221	E.CAPACITOR 16V 220U	1	
C60109	ECUM1H103ZFN	C.CAPACITOR 50V 0.01U	1	
C60110,11	ECEA1CU100	E.CAPACITOR 16V 10U	2	
C60112	ECEA1CU470	E.CAPACITOR 16V 47U	1	
C60501	ECEA1EU4R7	E.CAPACITOR 25V 4.7U	1	
C60502	ECQB1H104JF	P.CAPACITOR 50V 0.1U	1	
C60503	ECEA1HN010S	E.CAPACITOR 50V 1U	1	
C60504	ECUM1H103ZFN	C.CAPACITOR 50V 0.01U	1	
C60505	ECEA1EN101S	E.CAPACITOR 25V 100U	1	
C60506	ECEA1CU101	E.CAPACITOR 16V 100U	1	
C60507	ECEA0JU470	E.CAPACITOR 6.3V 47U	1	
C60508,09	ECUM1H101JCN	C.CAPACITOR CH 50V 100P	2	
D1502-04	MA151K	DIODE	3	<R>
D1505	MA701A	DIODE	1	<R>
D1507	MA151K	DIODE	1	<R>
D1508	MA3020	DIODE	1	<R>

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
D1509	8P2M	DIODE	1	<R>
D1510	MA165VT	DIODE	1	<R>
D1511	MA151K	DIODE	1	<R>
D1512	VSD0002	DIODE	1	<R>
D1513	AK04	DIODE	1	<R>
D1514	MA1270-M	DIODE	1	<R>
D1515	MA185	DIODE	1	<R>
D1516	MA4075M	DIODE	1	<R>
D1517	MA4130M	DIODE	1	<R>
D1518	MA4120-M	DIODE	1	<R>
D1519,20	MA151K	DIODE	2	<R>
D1522	MA3160-L	DIODE	1	<R>
D1523	11EQS04	DIODE	1	<R>
D1524	MA4047M	DIODE	1	<R>
D1525,26	MA723VT	DIODE	2	<R>
D1528	MA4056M	DIODE	1	<R>
D1529	MA165VT	DIODE	1	<R>
D1530	MA4075M	DIODE	1	<R>
D1531	MA151K	DIODE	1	<R>
D1532	MA3068M	DIODE	1	<R>
D1541	MA3091-M	DIODE	1	<R>
D1542	MA4039	DIODE	1	<R>
D1543,44	MA151K	DIODE	2	<R>
D2001	MA151K	DIODE	1	<R>AG-DS850HP
D2002	MA151WA	DIODE	1	<R>
D2003	MA151K	DIODE	1	<R>
D2006	MA151WA	DIODE	1	<R>
D2007,08	MA151K	DIODE	2	<R>
D2308	MA151K	DIODE	1	<R>
D2309	MA151WK	DIODE	1	<R>
D2310	MA153	DIODE	1	<R>AG-DS850HP
D2401	MA151K	DIODE	1	<R>
D2501,02	MA151K	DIODE	2	<R>
D2701	MA4180-L	DIODE	1	<R>
D2703	MA4160-L	DIODE	1	<R>
D2704	11DQ04	DIODE	1	<R>
D2705	MA151K	DIODE	1	<R>
D2715,16	11DQ04	DIODE	2	<R>
D2717-19	11EQS04	DIODE	3	<R>
D2720	MA153	DIODE	1	<R>
D2721	11EQS04	DIODE	1	<R>
D2722	MA153	DIODE	1	<R>
D2723	11EQS04	DIODE	1	<R>
D2727	11EQS04	DIODE	1	<R>
D2734,35	MA4160-L	DIODE	2	<R>
D2736-38	MA4160-M	DIODE	3	<R>
D2741,42	MA4062M	DIODE	2	<R>
D2743	MA723VT	DIODE	1	<R>
D60001	11EQS04	DIODE	1	<R>
D60002	MA170	DIODE	1	<R>
D60003-06	11EQS04	DIODE	4	<R>
D60008	MA3043-M	DIODE	1	<R>
D60009	11ES1	DIODE	1	<R>
D60501,02	MA151K	DIODE	2	<R>
D60503	10E1	DIODE	1	<R>
D60504	MA151K	DIODE	1	<R>
D60505	MA170	DIODE	1	<R>
D60506	MA151K	DIODE	1	<R>
FA2202	VLF1036D101	FUSE	1	
FL2201-06	VLF0634	FILTER	6	
FL60001	VLF0630	FILTER	1	AG-DS850HP
IC1501	LM393PS	IC	1	<R>
IC1502	AN7912F	IC	1	<R>
IC1503	AN7905F	IC	1	<R>
IC1505,06	TL431CLP	IC	2	<R>
IC2001	MN6742VMEK	IC	1	<R>AG-DS850HP

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
IC2001	MN6742VCRS	IC	1	<R>AG-DS840HP
IC2002	MN1382-R	IC	1	<R>
IC2003	BA226F	IC	1	<R>
IC2004	MC14052BF	IC	1	<R>
IC2005	MC14013BF	IC	1	<R>
IC2006	TC4S30F	IC	1	<R>
IC2007,08	MN53015VZW	IC	2	<R>
IC2009	TC4W53F	IC	1	<R>
IC2010	LM339NS	IC	1	<R>
IC2012	MC74HCU04F	IC	1	<R>
IC2013	LM358PS	IC	1	<R>
IC2014	TC7S32F	IC	1	<R>
IC2016	MC14538BF	IC	1	<R>
IC2201	MN19041VSWA	IC	1	<R>
IC2202	L7A0269	IC	1	<R>
IC2203	PCM55HP	IC	1	<R>
IC2206	MC14050BF	IC	1	<R>
IC2207	LM358PS	IC	1	<R>
IC2302	NJM4556MB	IC	1	<R>
IC2303	LM358PS	IC	1	<R>
IC2304	LM393PS	IC	1	<R>AG-DS850HP
IC2305	MC14053BF	IC	1	<R>
IC2310	BA6302AF	IC	1	<R>
IC2311	MC14053BF	IC	1	<R>AG-DS850HP
IC2312	MC14013BF	IC	1	<R>AG-DS850HP
IC2401	MC14013BF	IC	1	<R>AG-DS850HP
IC2402	TC4W53F	IC	1	<R>AG-DS850HP
IC2403,04	TC7S02F	IC	2	<R>AG-DS850HP
IC2405	TC7S08F	IC	1	<R>AG-DS850HP
IC2406	M50927-531SP	IC	1	<R>
IC2501,02	LM324NS	IC	2	<R>
IC2503	LM393PS	IC	1	<R>
IC2505	MC14053BF	IC	1	<R>
IC2506	MC14052BF	IC	1	<R>
IC2507	MC14053BF	IC	1	<R>
IC2701	BA6149LS	IC	1	<R>
IC2703	AN3815K	IC	1	<R>
IC2704	XRA6435S	IC	1	<R>
IC2705	LM393PS	IC	1	<R>
IC2706	LM358PS	IC	1	<R>
IC2707	LM393PS	IC	1	<R>
IC2708	LM358PS	IC	1	<R>
IC2709	LM393PS	IC	1	<R>
IC2710,11	UPC4556G2	IC	2	<R>
IC2715	AN78N12	IC	1	<R>
IC60001	TD62503F	IC	1	<R>
IC60002	MN188166VCTC	IC	1	<R>AG-DS850HP
IC60002	MN188166VMCY	IC	1	<R>AG-DS840HP
IC60003	MN1382-R	IC	1	<R>
IC60007	LM358PS	IC	1	<R>
IC60101	LM324NS	IC	1	<R>
IC60501	LM393PS	IC	1	<R>
IC60502	M54649L	IC	1	<R>
IC60503	MN1382-R	IC	1	<R>
J2001	ERJ6GEY0R00	M.RESISTOR CH 1/10W 0	1	
J2003	ERJ6GEY0R00	M.RESISTOR CH 1/10W 0	1	
J2005	ERJ6GEY0R00	M.RESISTOR CH 1/10W 0	1	
J2201	ERJ6GEY0R00	M.RESISTOR CH 1/10W 0	1	
J2203	ERJ6GEY0R00	M.RESISTOR CH 1/10W 0	1	
J2206	ERJ6GEY0R00	M.RESISTOR CH 1/10W 0	1	
J2401	ERJ6GEY0R00	M.RESISTOR CH 1/10W 0	1	
J60001	ERJ6GEY0R00	M.RESISTOR CH 1/10W 0	1	
J60004	ERJ6GEY0R00	M.RESISTOR CH 1/10W 0	1	
K1501	ERJ6GEY0R00	M.RESISTOR CH 1/10W 0	1	
K1502	ERDS2T0	C.RESISTOR 1/4W 0	1	
L1501	VLQEL06R101K	COIL	1	

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
L1502,03	VLP0074	COIL	2	
L2001,02	VLQEL05S470J	COIL 47UH	2	
L2004-06	VLQEL05S470J	COIL 47UH	3	
L2007	VLP0054	COIL	1	
L2008	VLQEL05S470J	COIL 47UH	1	
L2201,02	VLQEL05S2R2K	COIL 2.2UH	2	
L2203-05	VLP0054	COIL	3	
L2206,07	VLQEL05S2R2K	COIL 2.2UH	2	
L2208	VLQEL05S470J	COIL 47UH	1	
L2301-04	VLQEL05S470J	COIL 47UH	4	
L2401	VLQEL05S470J	COIL 47UH	1	
L2502	VLQEL05S470J	COIL 47UH	1	
L2701	VLQ0128	COIL 47UH	1	
L2702-04	VLQ0129	COIL 300UH	3	
L2705	VLQEL05S470J	COIL 47UH	1	
L2707	VLQEL05S470J	COIL 47UH	1	
L2711	VLQEL05S470J	COIL 47UH	1	
L60001	VLQEL05S471K	COIL 470UH	1	AG-DS850HP
L60002	VLQEL05S470J	COIL 47UH	1	
L60501	VLQEL05S150K	COIL 15UH	1	
P1501	VJP1146	CONNECTOR	1	
P1502	VJP3076	CONNECTOR	1	
P1503	VJP1147	CONNECTOR (MALE) 12P	1	
P2201-03	VJS3202B020Z	CONNECTOR (FEMALE) 20P	3	
P2301	VJP1230T	CONNECTOR (MALE) 3P	1	
P2701	VJP3078	CONNECTOR (MALE)	1	
P2702	VJP3083	CONNECTOR (MALE)	1	
P2703	VJS2149W	CONNECTOR (FEMALE)	1	
P60001	VJP1230R	CONNECTOR (MALE) 3P	1	AG-DS850HP
P60003	VJS3135	CONNECTOR (FEMALE)	1	
P60501	VJS2149W	CONNECTOR (FEMALE)	1	
P60502	VJP1230T	CONNECTOR (MALE) 3P	1	
P60503	VJS3134	CONNECTOR	1	
Q1501	2SD1474	TRANSISTOR	1	<R>
Q1502	2SD973A-R	TRANSISTOR	1	<R>
Q1503	2SD1474	TRANSISTOR	1	<R>
Q1504	2SD1273	TRANSISTOR	1	<R>
Q1505	2SD973A	TRANSISTOR	1	<R>
Q2001	MSC2295-B	TRANSISTOR	1	<R>
Q2302-05	MSD601-R	TRANSISTOR	4	<R>
Q2703	MSB709-R	TRANSISTOR	1	<R>
Q2704	2SB1151	TRANSISTOR	1	<R>
Q2705-07	2SD601A-R	TRANSISTOR	3	<R>
Q2709-11	2SB772	TRANSISTOR	3	<R>
Q2713-16	MSB709-R	TRANSISTOR	4	<R>
Q60001	2SD638	TRANSISTOR	1	<R>
Q60002	MSB709-R	TRANSISTOR	1	<R>
Q60003	2SB819	TRANSISTOR	1	<R>
Q60004	MSD601-R	TRANSISTOR	1	<R>
Q60005	2SB819	TRANSISTOR	1	<R>
Q60006	MSD601-R	TRANSISTOR	1	<R>
Q60007	MSD602-R	TRANSISTOR	1	<R>
Q60008	2SD636	TRANSISTOR	1	<R>AG-DS850HP
Q60501-03	MSD601-R	TRANSISTOR	3	<R>
Q60504	2SB819	TRANSISTOR	1	<R>
Q60505	MSD601-R	TRANSISTOR	1	<R>
Q60506	2SD1273-Q	TRANSISTOR	1	<R>
Q60507	MSD601-R	TRANSISTOR	1	<R>
Q60508	2SB941	TRANSISTOR	1	<R>
Q60509	MSD601-R	TRANSISTOR	1	<R>
QR1502	MRN2402	TRANSISTOR	1	<R>
QR1503	MRN1402	TRANSISTOR	1	<R>
QR1541	UN2219	TRANSISTOR	1	<R>
QR2003	MRN1404	TRANSISTOR	1	<R>
QR2005	MRN1404	TRANSISTOR	1	<R>
QR2304,05	MRN2402	TRANSISTOR	2	<R>

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
QR2306	MRN1404	TRANSISTOR	1	<R>
QR2308	MRN1404	TRANSISTOR	1	<R>
QR2309	MRN2404	TRANSISTOR	1	<R>
QR2310	MRN1403	TRANSISTOR	1	<R>AG-DS850HP
QR2311,12	MRN1404	TRANSISTOR	2	<R>AG-DS850HP
QR2313	MRN2404	TRANSISTOR	1	<R>AG-DS850HP
QR2314	MRN1404	TRANSISTOR	1	<R>AG-DS850HP
QR2401	MRN1404	TRANSISTOR	1	<R>AG-DS850HP
QR2402	MRN2404	TRANSISTOR	1	<R>
QR2501-05	MRN1404	TRANSISTOR	5	<R>
QR2701	MRN1404	TRANSISTOR	1	<R>
QR2702	MRN2404	TRANSISTOR	1	<R>
QR2703	MRN1404	TRANSISTOR	1	<R>
QR2704	MRN1403	TRANSISTOR	1	<R>
QR60001	MRN2402	TRANSISTOR	1	<R>
QR60002	MRN1403	TRANSISTOR	1	<R>
QR60003	MRN2402	TRANSISTOR	1	<R>AG-DS850HP
QR60004	MRN1404	TRANSISTOR	1	<R>
QR60006,7	MRN1404	TRANSISTOR	2	<R>
QR60008	MRN1404	TRANSISTOR	1	<R>AG-DS850HP
QR60010	MRN1404	TRANSISTOR	1	<R>AG-DS850HP
QR60012	UN2219	TRANSISTOR	1	<R>
QR60013	MRN1402	TRANSISTOR	1	<R>
QR60501	MRN1402	TRANSISTOR	1	<R>
QR60502	UN211F	TRANSISTOR	1	<R>
QR60503	MRN1404	TRANSISTOR	1	<R>
R1501	ERDS2TJ181	C.RESISTOR 1/4W 180	1	
R1502	ERJ6GEYJ102	M.RESISTOR CH 1/10W 1K	1	
R1504	ERDS2TJ181	C.RESISTOR 1/4W 180	1	
R1505	VRE0034E103	M.RESISTOR CH 1/10W 10K	1	
R1506	VRE0034E473	M.RESISTOR CH 1/10W 47K	1	
R1507	VRE0034E222	M.RESISTOR CH 1/10W 2.2K	1	
R1509	ERJ6GEYJ102	M.RESISTOR CH 1/10W 1K	1	
R1510	ERJ6GEYJ331	M.RESISTOR CH 1/10W 330	1	
R1511	ERJ6GEYJ224	M.RESISTOR CH 1/10W 220K	1	
R1512-14	ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	3	
R1515	ERDS2TJ222	C.RESISTOR 1/4W 2.2K	1	
R1516-18	ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	3	
R1519	ERDS2TJ333	C.RESISTOR 1/4W 33K	1	
R1520	ERJ6GEYJ332	M.RESISTOR CH 1/10W 3.3K	1	
R1521	ERDS2TJ221	C.RESISTOR 1/4W 220	1	
R1522	ERDS2TJ181	C.RESISTOR 1/4W 180	1	
R1525	ERDS2TJ222	C.RESISTOR 1/4W 2.2K	1	
R1526,27	ERJ6GEYJ331	M.RESISTOR CH 1/10W 330	2	
R1528,29	ERDS2TJ181	C.RESISTOR 1/4W 180	2	
R1531	ERJ6GEYJ102	M.RESISTOR CH 1/10W 1K	1	
R1532	VRE0034E562	M.RESISTOR CH 1/10W 5.6K	1	
R1533	VRE0034E392	M.RESISTOR CH 1/10W 3.9K	1	
R1534	VRE0034E222	M.RESISTOR CH 1/10W 2.2K	1	
R1535	ERJ6GEYJ123	M.RESISTOR CH 1/10W 12K	1	
R1536	ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	1	
R1541,42	ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	2	
R2001	ERJ6GEYJ471	M.RESISTOR CH 1/10W 470	1	
R2002	ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	1	
R2003,04	ERJ6GEYG333	M.RESISTOR CH 1/10W 33K	2	
R2005-07	ERJ6GEYJ102	M.RESISTOR CH 1/10W 1K	3	
R2008	ERJ6GEYJ222	M.RESISTOR CH 1/10W 2.2K	1	
R2009,10	ERJ6GEYJ102	M.RESISTOR CH 1/10W 1K	2	
R2013	ERJ6GEYJ332	M.RESISTOR CH 1/10W 3.3K	1	
R2017,18	ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	2	
R2019	ERJ6GEYJ124	M.RESISTOR CH 1/10W 120K	1	
R2020	ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	1	
R2021	ERJ6GEYJ683	M.RESISTOR CH 1/10W 68K	1	
R2022	ERJ6GEYJ102	M.RESISTOR CH 1/10W 1K	1	
R2023	ERJ6GEYJ224	M.RESISTOR CH 1/10W 220K	1	AG-DS850HP
R2024,25	ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	2	AG-DS850HP
R2026	ERJ6GEYJ184	M.RESISTOR CH 1/10W 180K	1	AG-DS850HP
R2027	ERJ6GEYJ105	M.RESISTOR CH 1/10W 1M	1	
R2028	ERJ6GEYJ822	M.RESISTOR CH 1/10W 8.2K	1	
R2029	ERJ6GEYJ102	M.RESISTOR CH 1/10W 1K	1	
R2030	ERJ6GEYJ223	M.RESISTOR CH 1/10W 22K	1	
R2031	ERJ6GEYG241	M.RESISTOR CH 1/10W 240	1	

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
R2032	ERJ6GEYJ473	M.RESISTOR CH 1/10W 47K	1	
R2033	ERJ6GEYJ224	M.RESISTOR CH 1/10W 220K	1	
R2036	ERJ6GEYJ101	M.RESISTOR CH 1/10W 100	1	
R2046	ERJ6GEYJ104	M.RESISTOR CH 1/10W 100K	1	
R2047	ERJ6GEYJ332	M.RESISTOR CH 1/10W 3.3K	1	
R2048	ERJ6GEYJ471	M.RESISTOR CH 1/10W 470	1	
R2049	ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	1	
R2051	ERJ6GEYJ101	M.RESISTOR CH 1/10W 100	1	AG-DS850HP
R2054-56	ERJ6GEYJ101	M.RESISTOR CH 1/10W 100	3	
R2059,60	ERJ6GEYJ101	M.RESISTOR CH 1/10W 100	2	
R2062	ERJ6GEYJ101	M.RESISTOR CH 1/10W 100	1	
R2064-66	ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	3	
R2201	ERJ6GEYJ105	M.RESISTOR CH 1/10W 1M	1	
R2202	ERJ6GEYJ101	M.RESISTOR CH 1/10W 100	1	
R2203	ERJ6GEYJ331	M.RESISTOR CH 1/10W 330	1	
R2205,06	ERJ6GEYJ473	M.RESISTOR CH 1/10W 47K	2	
R2207	ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	1	
R2208	ERJ6GEYG104	M.RESISTOR CH 1/10W 100K	1	
R2211	ERJ6GEYG473	M.RESISTOR CH 1/10W 47K	1	
R2212	ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	1	
R2213-18	ERJ6GEYJ101	M.RESISTOR CH 1/10W 100	6	
R2220-23	ERJ6GEYJ101	M.RESISTOR CH 1/10W 100	4	
R2240	ERJ6GEYG473	M.RESISTOR CH 1/10W 47K	1	
R2241	ERJ6GEYG104	M.RESISTOR CH 1/10W 100K	1	
R2242	ERJ6GEYJ101	M.RESISTOR CH 1/10W 100	1	
R2243,44	ERJ6GEY0R00	M.RESISTOR CH 1/10W 0	2	
R2331	ERJ6GEYJ222	M.RESISTOR CH 1/10W 2.2K	1	
R2332	ERJ6GEYJ683	M.RESISTOR CH 1/10W 68K	1	AG-DS850HP
R2333	ERJ6GEYJ101	M.RESISTOR CH 1/10W 100	1	
R2334	ERJ6GEYJ104	M.RESISTOR CH 1/10W 100K	1	
R2335	ERJ6GEYG333	M.RESISTOR CH 1/10W 33K	1	
R2336	ERJ6GEYJ822	M.RESISTOR CH 1/10W 8.2K	1	
R2337	ERJ6GEYG242	M.RESISTOR CH 1/10W 2.4K	1	
R2338	ERJ6GEYJ822	M.RESISTOR CH 1/10W 8.2K	1	
R2339	ERJ6GEYJ104	M.RESISTOR CH 1/10W 100K	1	
R2340,41	ERJ6GEYJ392	M.RESISTOR CH 1/10W 3.9K	2	
R2342	ERJ6GEYJ681	M.RESISTOR CH 1/10W 680	1	
R2343	ERJ6GEYJ473	M.RESISTOR CH 1/10W 47K	1	
R2344	ERJ6GEYJ563	M.RESISTOR CH 1/10W 56K	1	
R2345	ERJ6GEYG153	M.RESISTOR CH 1/10W 15K	1	
R2346	ERJ6GEYJ563	M.RESISTOR CH 1/10W 56K	1	
R2347	ERJ6GEYJ124	M.RESISTOR CH 1/10W 120K	1	
R2352	ERJ6GEYJ752	M.RESISTOR CH 1/10W 7.5K	1	
R2353,54	ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	2	
R2355	ERJ6GEYJ752	M.RESISTOR CH 1/10W 7.5K	1	
R2356	ERJ6GEYJ104	M.RESISTOR CH 1/10W 100K	1	
R2357,58	ERJ6GEYJ272	M.RESISTOR CH 1/10W 2.7K	2	
R2359	ERJ6GEYJ104	M.RESISTOR CH 1/10W 100K	1	
R2360,61	ERJ6GEYJ222	M.RESISTOR CH 1/10W 2.2K	2	
R2362	ERJ6GEYG472	M.RESISTOR CH 1/10W 4.7K	1	
R2363	ERJ6GEYG153	M.RESISTOR CH 1/10W 15K	1	
R2364	ERJ6GEYG913	M.RESISTOR CH 1/10W 91K	1	
R2370,71	ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	2	
R2372	ERJ6GEYG153	M.RESISTOR CH 1/10W 15K	1	AG-DS850HP
R2373	ERDS2TJ122	C.RESISTOR 1/4W 1.2K	1	AG-DS850HP
R2374	ERJ6GEYG472	M.RESISTOR CH 1/10W 4.7K	1	AG-DS850HP
R2375	ERJ6GEYJ562	M.RESISTOR CH 1/10W 5.6K	1	AG-DS850HP
R2376	ERJ6GEYJ561	M.RESISTOR CH 1/10W 560	1	AG-DS850HP
R2377	ERJ6GEYJ473	M.RESISTOR CH 1/10W 47K	1	AG-DS850HP
R2378	ERJ6GEYJ154	M.RESISTOR CH 1/10W 150K	1	AG-DS850HP
R2379	ERJ6GEYJ104	M.RESISTOR CH 1/10W 100K	1	
R2380	ERJ6GEYJ101	M.RESISTOR CH 1/10W 100	1	AG-DS850HP
R2381	ERDS2TJ122	C.RESISTOR 1/4W 1.2K	1	AG-DS850HP
R2401	ERJ6GEYJ332	M.RESISTOR CH 1/10W 3.3K	1	
R2402,03	ERJ6GEYJ104	M.RESISTOR CH 1/10W 100K	2	
R2404,05	ERJ6GEYJ473	M.RESISTOR CH 1/10W 47K	2	AG-DS850HP
R2406	ERJ6GEYJ105	M.RESISTOR CH 1/10W 1M	1	
R2407,08	ERJ6GEYJ473	M.RESISTOR CH 1/10W 47K	2	
R2409	ERJ6GEYJ104	M.RESISTOR CH 1/10W 100K	1	
R2410	ERJ6GEYJ473	M.RESISTOR CH 1/10W 47K	1	
R2411	ERJ6GEY0R00	M.RESISTOR CH 1/10W 0	1	
R2501	ERJ6GEYJ682	M.RESISTOR CH 1/10W 6.8K	1	
R2502	ERJ6GEYJ334	M.RESISTOR CH 1/10W 330K	1	
R2503	ERJ6GEYJ274	M.RESISTOR CH 1/10W 270K	1	
R2504	ERJ6GEYJ123	M.RESISTOR CH 1/10W 12K	1	

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
R2505	ERJ6GEYJ334	M.RESISTOR CH 1/10W 330K	1	
R2506	ERJ6GEYJ154	M.RESISTOR CH 1/10W 150K	1	
R2507-10	ERJ6GEYG104	M.RESISTOR CH 1/10W 100K	4	
R2511-15	ERJ6GEYJ104	M.RESISTOR CH 1/10W 100K	5	
R2516	ERJ6GEYG393	M.RESISTOR CH 1/10W 39K	1	
R2517	ERJ6GEYG223	M.RESISTOR CH 1/10W 22K	1	
R2518-20	ERJ6GEYG124	M.RESISTOR CH 1/10W 120K	3	
R2521	ERJ6GEYG154	M.RESISTOR CH 1/10W 150K	1	
R2522	ERJ6GEYJ104	M.RESISTOR CH 1/10W 100K	1	
R2523,24	ERJ6GEYJ102	M.RESISTOR CH 1/10W 1K	2	
R2701	ERJ6GEYJ563	M.RESISTOR CH 1/10W 56K	1	
R2709,10	ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	2	
R2711	ERJ6GEYJ154	M.RESISTOR CH 1/10W 150K	1	
R2712	ERJ6GEYJ104	M.RESISTOR CH 1/10W 100K	1	
R2713	ERJ6GEYJ222	M.RESISTOR CH 1/10W 2.2K	1	
R2714-17	ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	4	
R2718	ERG2SJ561	M.RESISTOR 2W 560	1	
R2719	ERDS2TJ270	C.RESISTOR 1/4W 27	1	
R2725	ERJ6GEYJ334	M.RESISTOR CH 1/10W 330K	1	
R2727	ERDS2TJ150	C.RESISTOR 1/4W 15	1	
R2729	ERJ6GEYJ102	M.RESISTOR CH 1/10W 1K	1	
R2730	ERDS2TJ182	C.RESISTOR 1/4W 1.8K	1	
R2731	ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	1	
R2732	ERJ6GEYG153	M.RESISTOR CH 1/10W 15K	1	
R2733	ERDS2TJ182	C.RESISTOR 1/4W 1.8K	1	
R2734	ERDS2TJ391	C.RESISTOR 1/4W 390	1	
R2735	ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	1	
R2736	ERJ6GEYG153	M.RESISTOR CH 1/10W 15K	1	
R2738,39	ERDS2TJ150	C.RESISTOR 1/4W 15	2	
R2740	ERX12SJR68	M.RESISTOR CH 1/2W 0.68	1	
R2743	ERJ6GEYJ122	M.RESISTOR CH 1/10W 1.2K	1	
R2747	ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	1	
R2748	ERJ6GEYJ124	M.RESISTOR CH 1/10W 120K	1	
R2751	ERJ6GEYJ102	M.RESISTOR CH 1/10W 1K	1	
R2752-54	ERDS2TJ330	C.RESISTOR 1/4W 33	3	
R2755	ERX12SJR47	M.RESISTOR CH 1/2W 0.47	1	
R2756	ERJ6GEYJ330	M.RESISTOR CH 1/10W 33	1	
R2757	ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	1	
R2758	ERJ6GEYJ224	M.RESISTOR CH 1/10W 220K	1	
R2759	ERJ6GEYJ223	M.RESISTOR CH 1/10W 22K	1	
R2760	ERJ6GEYJ184	M.RESISTOR CH 1/10W 180K	1	
R2761,62	ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	2	
R2763,64	ERJ6GEYJ473	M.RESISTOR CH 1/10W 47K	2	
R2765	ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	1	
R2766	ERJ6GEYJ224	M.RESISTOR CH 1/10W 220K	1	
R2767	ERJ6GEYJ223	M.RESISTOR CH 1/10W 22K	1	
R2768	ERJ6GEYJ184	M.RESISTOR CH 1/10W 180K	1	
R2769,70	ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	2	
R2771,72	ERJ6GEYJ473	M.RESISTOR CH 1/10W 47K	2	
R2773,74	ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	2	
R2775	ERJ6GEYJ473	M.RESISTOR CH 1/10W 47K	1	
R2776	ERJ6GEYG472	M.RESISTOR CH 1/10W 4.7K	1	
R2777	ERJ6GEYJ334	M.RESISTOR CH 1/10W 330K	1	
R2778-82	ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	5	
R2783	ERJ6GEYJ224	M.RESISTOR CH 1/10W 220K	1	
R2784	ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	1	
R2785	ERJ6GEYJ224	M.RESISTOR CH 1/10W 220K	1	
R2786,87	ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	2	
R2788	ERJ6GEYJ473	M.RESISTOR CH 1/10W 47K	1	
R2789	ERJ6GEYG472	M.RESISTOR CH 1/10W 4.7K	1	
R2790	ERJ6GEYG333	M.RESISTOR CH 1/10W 33K	1	
R2791	ERJ6GEYJ332	M.RESISTOR CH 1/10W 3.3K	1	
R2792	ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	1	
R2793	ERJ6GEYJ473	M.RESISTOR CH 1/10W 47K	1	
R2794	ERJ6GEYG472	M.RESISTOR CH 1/10W 4.7K	1	
R2795	ERJ6GEYG333	M.RESISTOR CH 1/10W 33K	1	
R2796	ERJ6GEYJ332	M.RESISTOR CH 1/10W 3.3K	1	
R2799,00	ERJ6GEY0R00	M.RESISTOR CH 1/10W 0	2	
R2803	ERG2SJ221	M.RESISTOR 2W 220	1	
R2821	ERDS2TJ682	C.RESISTOR 1/4W 6.8K	1	
R2828,29	ERJ6GEYJ104	M.RESISTOR CH 1/10W 100K	2	
R2830	ERDS2TJ391	C.RESISTOR 1/4W 390	1	
R2831	ERDS2TJ561	C.RESISTOR 1/4W 560	1	
R2832	ERDS2TJ562	C.RESISTOR 1/4W 5.6K	1	
R2833	ERDS2TJ391	C.RESISTOR 1/4W 390	1	

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
R2834	ERDS2TJ182	C.RESISTOR 1/4W 1.8K	1	
R2835	ERJ6GEYJ471	M.RESISTOR CH 1/10W 470	1	
R2836	ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	1	
R2838,39	ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	2	
R2840	ERJ6GEYJ222	M.RESISTOR CH 1/10W 2.2K	1	
R2841	ERJ6GEYJ104	M.RESISTOR CH 1/10W 100K	1	
R2842,43	ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	2	
R2844	ERJ6GEYJ222	M.RESISTOR CH 1/10W 2.2K	1	
R2845	ERJ6GEYJ104	M.RESISTOR CH 1/10W 100K	1	
R2846-48	ERJ6GEYJ271	M.RESISTOR CH 1/10W 270	3	
R2849	ERJ6GEY0R00	M.RESISTOR CH 1/10W 0	1	
R2850	ERDS2TJ102	C.RESISTOR 1/4W 1K	1	
R2862,63	ERJ6GEYJ332	M.RESISTOR CH 1/10W 3.3K	2	
R60001	ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	1	
R60002	ERD2FCG220	C.RESISTOR 2W 22	1	
R60003	ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	1	
R60004	ERJ6GEYJ183	M.RESISTOR CH 1/10W 18K	1	
R60005	ERJ6GEYJ272	M.RESISTOR CH 1/10W 2.7K	1	
R60006	ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	1	
R60007	ERJ6GEYJ272	M.RESISTOR CH 1/10W 2.7K	1	
R60008	ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	1	
R60009	ERJ6GEYJ183	M.RESISTOR CH 1/10W 18K	1	
R60010	ERJ6GEYJ471	M.RESISTOR CH 1/10W 470	1	
R60011	ERJ6GEYJ104	M.RESISTOR CH 1/10W 100K	1	
R60012	ERJ6GEYJ473	M.RESISTOR CH 1/10W 47K	1	
R60013	ERJ6GEYJ471	M.RESISTOR CH 1/10W 470	1	
R60015	ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	1	
R60016	ERJ6GEYJ272	M.RESISTOR CH 1/10W 2.7K	1	
R60017,18	ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	2	
R60019	ERDS2TJ472	C.RESISTOR 1/4W 4.7K	1	
R60020	ERDS2TJ471	C.RESISTOR 1/4W 470	1	
R60021-23	ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	4	
R60025	ERDS2TJ333	C.RESISTOR 1/4W 33K	1	AG-DS850HP
R60026-29	ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	4	
R60030	ERJ6GEYJ102	M.RESISTOR CH 1/10W 1K	1	
R60031	ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	1	
R60032-36	ERJ6GEYJ473	M.RESISTOR CH 1/10W 47K	4	
R60037	ERD2FCJ4R7	C.RESISTOR 2W 4.7	1	
R60038	ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	1	
R60039	ERJ6GEYJ473	M.RESISTOR CH 1/10W 47K	1	
R60040	ERJ6GEYJ101	M.RESISTOR CH 1/10W 100	1	AG-DS850HP
R60043,44	ERJ6GEYG472	M.RESISTOR CH 1/10W 4.7K	2	
R60045	ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	1	
R60046	ERJ6GEY0R00	M.RESISTOR CH 1/10W 0	1	
R60047	ERG1SJ330	M.RESISTOR 1W 33	1	
R60048,49	ERJ6GEYJ101	M.RESISTOR CH 1/10W 100	2	AG-DS850HP
R60055	ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	1	
R60056	ERJ6GEYJ473	M.RESISTOR CH 1/10W 47K	1	
R60057	ERJ6GEYJ822	M.RESISTOR CH 1/10W 8.2K	1	
R60058	ERJ6GEYJ393	M.RESISTOR CH 1/10W 39K	1	
R60059	ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	1	
R60060	ERJ6GEYJ684	M.RESISTOR CH 1/10W 680K	1	
R60101	ERJ6GEYG102	M.RESISTOR CH 1/10W 1K	1	
R60102	ERJ6GEYG302	M.RESISTOR CH 1/10W 3K	1	
R60103-05	ERJ6GEYG102	M.RESISTOR CH 1/10W 1K	3	
R60106	ERJ6GEYJ273	M.RESISTOR CH 1/10W 27K	1	
R60107	ERJ6GEYJ823	M.RESISTOR CH 1/10W 82K	1	
R60108-11	ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	4	
R60501	ERJ6GEYJ222	M.RESISTOR CH 1/10W 2.2K	1	
R60502,03	ERJ6GEYG153	M.RESISTOR CH 1/10W 15K	2	
R60504	ERJ6GEYJ181	M.RESISTOR CH 1/10W 180	1	
R60505	ERJ6GEYJ122	M.RESISTOR CH 1/10W 1.2K	1	
R60506	ERJ6GEYJ182	M.RESISTOR CH 1/10W 1.8K	1	
R60507,08	ERJ6GEYJ222	M.RESISTOR CH 1/10W 2.2K	2	
R60509	ERJ6GEYJ681	M.RESISTOR CH 1/10W 680	1	
R60510,11	ERJ6GEYJ272	M.RESISTOR CH 1/10W 2.7K	2	
R60512	ERJ6GEYJ102	M.RESISTOR CH 1/10W 1K	1	
R60513	ERJ6GEYJ121	M.RESISTOR CH 1/10W 120	1	
R60514	ERJ6GEYJ183	M.RESISTOR CH 1/10W 18K	1	
R60515	ERJ6GEYJ474	M.RESISTOR CH 1/10W 470K	1	
R60516	ERJ6GEYJ682	M.RESISTOR CH 1/10W 6.8K	1	
R60517,18	ERJ6GEYJ821	M.RESISTOR CH 1/10W 820	2	
R60519	ERJ6GEYJ181	M.RESISTOR CH 1/10W 180	1	
R60520,21	ERJ6GEYJ682	M.RESISTOR CH 1/10W 6.8K	2	
R60522	ERJ6GEYJ562	M.RESISTOR CH 1/10W 5.6K	1	

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
R60523	ERJ6GEYJ332	M.RESISTOR CH 1/10W 3.3K	1	
R60524	ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	1	
R60525	ERDS2TJ151	C.RESISTOR 1/4W 150	1	
R60526	ERJ6GEYJ683	M.RESISTOR CH 1/10W 68K	1	
R60527,28	ERG1SJ300	M.RESISTOR 1W 30	2	
R60529	ERJ6GEYJ682	M.RESISTOR CH 1/10W 6.8K	1	
R60530	ERJ6GEYJ473	M.RESISTOR CH 1/10W 47K	1	
T1501	ETE13K86AY	TRANSFORMER	1	
T60001	EIQ7QF002B	TRANSFORMER	1	
VR2001	EVN32CA00B54	V.RESISTOR 50K	1	
VR2003	EVN32CA00B15	V.RESISTOR 100K	1	
X2001	VSX0296	CRYSTAL OSCILLATOR	1	<R>
X2002	VSX0060	CRYSTAL OSCILLATOR	1	<R>
X2201	VSX0197	CRYSTAL OSCILLATOR	1	<R>
X2401	VSX0086	CRYSTAL OSCILLATOR	1	<R>
X2701	VSX0136	CRYSTAL OSCILLATOR	1	<R>
X60001	VSX0230		1	<R>
		MISCELLANEOUS		
E43	VMX0985	P.C.B. SPACER	2	
E52	XYN3+F8	SCREW	2	
E80	VSC4042	HEAT SINK	2	
E84	VMC0493	HEAT SINK SPRING	1	
E82	VMC0075	HEAT SINK SPRING	1	
E81	VSC1215	HEAT SINK	1	
E42	VJF0816	CORD CLAMPER	1	
	VWJ18AW105M1	FLEXIBLE WIRE	1	
	VWJ04CN150CA	FLAT CABLE	1	
	VSC1689	HEAT SINK	1	

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
	VEP08159A	P.C.BOARD W/COMPONENT		AG-DS850HP
		TBC (1)		
	VEP08159B	P.C.BOARD W/COMPONENT		AG-DS840HP
		TBC (1)		
	VEP00X66A	P.C.BOARD W/COMPONENT		AG-DS850HP
		TBC (1) SUB		FOR VEP08159A
	VEP00X66B	P.C.BOARD W/COMPONENT		AG-DS840HP
		TBC (1) SUB		FOR VEP08159B
C1,2	ECUM1H103KBN	C.CAPACITOR CH 50V 0.01U	2	
C3,4	ECUM1E104ZFN	C.CAPACITOR CH 25V 0.1U	2	
C8001,02	ECUM1E104ZFN	C.CAPACITOR CH 25V 0.1U	2	
C8003	ECEV1CV100	E.CAPACITOR 16V 10U	1	
C8004-12	ECUM1E104ZFN	C.CAPACITOR CH 25V 0.1U	9	
C8014-20	ECUM1E104ZFN	C.CAPACITOR CH 25V 0.1U	7	
C8021	ECEV0JV220	E.CAPACITOR 6.3V 22U	1	
C8025	ECUM1E104ZFN	C.CAPACITOR CH 25V 0.1U	1	
C8051,52	ECUM1E104ZFN	C.CAPACITOR CH 25V 0.1U	2	
C8053	ECEV1CV470Q	E.CAPACITOR CH 16V 47U	1	
C8054	ECUM1E104ZFN	C.CAPACITOR CH 25V 0.1U	1	
C8055	ECEV1CV220	E.CAPACITOR 16V 22U	1	
C8056	ECUM1E104ZFN	C.CAPACITOR CH 25V 0.1U	1	
C8059	ECEV1CV220	E.CAPACITOR 16V 22U	1	
C8060	ECUM1E104ZFN	C.CAPACITOR CH 25V 0.1U	1	
C8062,63	ECUM1E104ZFN	C.CAPACITOR CH 25V 0.1U	2	
C8064	ECEV1CV220	E.CAPACITOR 16V 22U	1	
C8065	ECUM1E104ZFN	C.CAPACITOR CH 25V 0.1U	1	
C8066	ECEV0JV101	E.CAPACITOR 6.3V 100U	1	
C8067	ECEV1HV2R2	E.CAPACITOR 50V 2.2U	1	
C8068-79	ECUM1E104ZFN	C.CAPACITOR CH 25V 0.1U	12	
C8101,02	ECEV1CV470Q	E.CAPACITOR CH 16V 47U	2	
C8103	ECUM1E104ZFN	C.CAPACITOR CH 25V 0.1U	1	
C8106	ECUM1H181JUN	C.CAPACITOR 50V 180P	1	
C8107	ECUM1E104ZFN	C.CAPACITOR CH 25V 0.1U	1	
C8108	ECUM1H223KBN	C.CAPACITOR CH 50V 0.022U	1	
C8109,10	ECUM1H103KBN	C.CAPACITOR CH 50V 0.01U	2	
C8111	ECEV1HV3R3	E.CAPACITOR 50V 3.3U	1	
C8112	ECEV1CV100	E.CAPACITOR 16V 10U	1	
C8113	ECEV1CV470Q	E.CAPACITOR CH 16V 47U	1	
C8114	ECUM1H150JCN	C.CAPACITOR CH 50V 15P	1	
C8115	ECUM1H102KBN	C.CAPACITOR CH 50V 1000P	1	
C8116	ECUM1E104ZFN	C.CAPACITOR CH 25V 0.1U	1	
C8117	ECUM1H121JCN	C.CAPACITOR CH 50V 120P	1	
C8118	ECUM1H390JCN	C.CAPACITOR CH 50V 39P	1	
C8119	ECUM1E104ZFN	C.CAPACITOR CH 25V 0.1U	1	
C8120	ECEV1CV470Q	E.CAPACITOR CH 16V 47U	1	
C8121	ECUM1H223KBN	C.CAPACITOR CH 50V 0.022U	1	
C8122-25	ECUM1E104ZFN	C.CAPACITOR CH 25V 0.1U	4	
C8126	ECEV1CV470Q	E.CAPACITOR CH 16V 47U	1	
C8127	ECEV1HV010	E.CAPACITOR 50V 1U	1	
C8128	ECUM1H682KBN	C.CAPACITOR CH 50V 6800P	1	
C8129	ECUM1E104ZFN	C.CAPACITOR CH 25V 0.1U	1	
C8131	ECUM1H102JCN	C.CAPACITOR CH 50V 1000P	1	
C8134	ECUM1H102JCN	C.CAPACITOR CH 50V 1000P	1	
C8135,36	ECUM1H103KBN	C.CAPACITOR CH 50V 0.01U	2	
C8138	ECUM1H102JCN	C.CAPACITOR CH 50V 1000P	1	
C8139	ECUM1H221JCN	C.CAPACITOR CH 50V 220P	1	
C8140	ECUM1H330JCN	C.CAPACITOR CH 50V 33P	1	
C8141	ECUM1H102KBN	C.CAPACITOR CH 50V 1000P	1	
C8142,43	ECUM1E104ZFN	C.CAPACITOR CH 25V 0.1U	2	
C8145	ECUM1E104ZFN	C.CAPACITOR CH 25V 0.1U	1	
C8146	ECUM1H102JCN	C.CAPACITOR CH 50V 1000P	1	
C8147-49	ECUM1E104ZFN	C.CAPACITOR CH 25V 0.1U	3	
C8150	ECUM1H123KBN	C.CAPACITOR CH 50V 0.012U	1	
C8151	ECUM1H102JCN	C.CAPACITOR CH 50V 1000P	1	
C8152	ECUM1H103KBN	C.CAPACITOR CH 50V 0.01U	1	
C8153	ECEV1EV4R7	E.CAPACITOR 25V 4.7U	1	
C8154	ECUM1H220JCN	C.CAPACITOR CH 50V 22P	1	
C8155	ECUM1E104ZFN	C.CAPACITOR CH 25V 0.1U	1	
C8156	ECUM1H100DCN	C.CAPACITOR CH 50V 10P	1	
C8157	ECUM1E104ZFN	C.CAPACITOR CH 25V 0.1U	1	
C8201	ECEV1CV470Q	E.CAPACITOR CH 16V 47U	1	
C8202	ECUM1E104ZFN	C.CAPACITOR CH 25V 0.1U	1	

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
C8204	ECUM1E104ZFN	C.CAPACITOR CH 25V 0.1U	1	
C8205	ECEV0JV470	E.CAPACITOR 6.3V 47U	1	
C8206	ECUM1E104ZFN	C.CAPACITOR CH 25V 0.1U	1	
C8208-10	ECUM1E104ZFN	C.CAPACITOR CH 25V 0.1U	3	
C8211	ECUM1H102JCN	C.CAPACITOR CH 50V 1000P	1	
C8212	ECEV1HVR47	E.CAPACITOR 50V 0.47U	1	
C8213	ECEV1CV470Q	E.CAPACITOR CH 16V 47U	1	
C8214,15	ECUM1E104ZFN	C.CAPACITOR CH 25V 0.1U	2	
C8219	ECUM1E104ZFN	C.CAPACITOR CH 25V 0.1U	1	
C8220	ECEV0JV470	E.CAPACITOR 6.3V 47U	1	
C8221	ECUM1E104ZFN	C.CAPACITOR CH 25V 0.1U	1	
C8222	ECEV1CV470Q	E.CAPACITOR CH 16V 47U	1	
C8223	ECUM1E104ZFN	C.CAPACITOR CH 25V 0.1U	1	
C8225	ECUM1E104ZFN	C.CAPACITOR CH 25V 0.1U	1	
C8226	ECEV0JV470	E.CAPACITOR 6.3V 47U	1	
C8227	ECUM1E104ZFN	C.CAPACITOR CH 25V 0.1U	1	
C8228	ECEV0JV470	E.CAPACITOR 6.3V 47U	1	
C8229-32	ECUM1E104ZFN	C.CAPACITOR CH 25V 0.1U	4	
C8233	ECEV1HVR47	E.CAPACITOR 50V 0.47U	1	
C8234	ECEV1CV470Q	E.CAPACITOR CH 16V 47U	1	
C8235,36	ECUM1E104ZFN	C.CAPACITOR CH 25V 0.1U	2	
C8238	ECUM1H120JCN	C.CAPACITOR CH 50V 12P	1	
C8239	ECUM1H221JCN	C.CAPACITOR CH 50V 220P	1	
C8240	ECUM1E104ZFN	C.CAPACITOR CH 25V 0.1U	1	
C8241	ECEV0JV470	E.CAPACITOR 6.3V 47U	1	
C8242	ECUM1E104ZFN	C.CAPACITOR CH 25V 0.1U	1	
C8244-46	ECUM1E104ZFN	C.CAPACITOR CH 25V 0.1U	3	
C8247	ECEV1HVR47	E.CAPACITOR 50V 0.47U	1	
C8248	ECEV1CV470Q	E.CAPACITOR CH 16V 47U	1	
C8252	ECUM1H080DCN	C.CAPACITOR CH 50V 80P	1	
C8253	ECUM1H221JCN	C.CAPACITOR CH 50V 220P	1	
C8254	ECUM1E104ZFN	C.CAPACITOR CH 25V 0.1U	1	
C8255	ECEV1HV010	E.CAPACITOR 50V 1U	1	
C8256	ECUM1E104ZFN	C.CAPACITOR CH 25V 0.1U	1	
C8301-09	ECUM1E104ZFN	C.CAPACITOR CH 25V 0.1U	9	
C8310	ECUM1H050DCN	C.CAPACITOR CH 50V 5P	1	
C8311-13	ECUM1E104ZFN	C.CAPACITOR CH 25V 0.1U	3	
C8314	ECEV0JV470	E.CAPACITOR 6.3V 47U	1	
C8315,16	ECUM1E104ZFN	C.CAPACITOR CH 25V 0.1U	2	
C8317	ECEV0JV470	E.CAPACITOR 6.3V 47U	1	
C8318-20	ECUM1E104ZFN	C.CAPACITOR CH 25V 0.1U	3	
C8322	ECUM1E104ZFN	C.CAPACITOR CH 25V 0.1U	1	
C8326	ECUM1E104ZFN	C.CAPACITOR CH 25V 0.1U	1	
C8401-12	ECUM1E104ZFN	C.CAPACITOR CH 25V 0.1U	12	
C8501	ECQB1H683JF	P.CAPACITOR 50V 0.068U	1	
C8502	ECUM1E104ZFN	C.CAPACITOR CH 25V 0.1U	1	
C8503	ECEV1CV470Q	E.CAPACITOR CH 16V 47U	1	
C8506	ECUM1H103KBN	C.CAPACITOR CH 50V 0.01U	1	
C8507,08	ECUM1H150JCN	C.CAPACITOR CH 50V 15P	2	
C8509	ECUM1E104ZFN	C.CAPACITOR CH 25V 0.1U	1	
C8510	ECEV1HV100	E.CAPACITOR 50V 10U	1	
C8511	ECUM1H223KBN	C.CAPACITOR CH 50V 0.022U	1	
C8512	ECUM1E473KBN	C.CAPACITOR CH 25V 0.047U	1	
C8513	ECUM1H333KBN	C.CAPACITOR CH 50V 0.033U	1	
C8514	ECUM1H101JCN	C.CAPACITOR CH 50V 100P	1	
C8515	ECUM1E104ZFN	C.CAPACITOR CH 25V 0.1U	1	
C8516	ECEV1CV470Q	E.CAPACITOR CH 16V 47U	1	
C8517	ECUM1E104ZFN	C.CAPACITOR CH 25V 0.1U	1	
C8519-23	ECUM1E104ZFN	C.CAPACITOR CH 25V 0.1U	5	
D8001,02	MA151K	DIODE	2	<R>
D8053	MA3051-L	DIODE	1	<R>
D8054	MA3033-L	DIODE	1	<R>
D8101	MA335-R	DIODE	1	<R>
D8102-04	MA151K	DIODE	3	<R>
D8201-05	MA736	DIODE	5	<R>
D8401	MA151K	DIODE	1	<R>
D8550,51	11EQS04	DIODE	2	<R>
FL8201	ELB4R042	FILTER	1	
FL8202,03	VLF0757	FILTER	2	

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
FL8550,51	VLF1016A223	FILTER	2	
FL8553-55	VLF1016A223	FILTER	3	
FL8557-59	VLF1016A470	FILTER	3	
FL8560	VLF1016A223	FILTER	1	
FL8561-63	VLF1016A470	FILTER	3	
FL8564-66	VLF1016A223	FILTER	3	
IC1	SN74LS221NS	IC	1	<R>
IC2	MC74HC32AF	IC	1	<R>
IC8001	CXD1175AM	IC	1	<R>
IC8002	MC74HC574AF	IC	1	<R>
IC8003	MN53030VMB	IC	1	<R>
IC8004-07	MB81C1501PF	IC	4	<R>
IC8008	MC74HC574AF	IC	1	<R>
IC8009	HM63021FP	IC	1	<R>
IC8010	UPD65013F101	IC	1	<R>
IC8011	MC74HC86F	IC	1	<R>
IC8012	MN1382-R	IC	1	<R>
IC8013	MC74HC74AF	IC	1	<R>
IC8014	74F86SJ	IC	1	<R>
IC8015	MC74HC574AF	IC	1	<R>
IC8016	NJM78L05UA	IC	1	<R>
IC8017,18	MC74HC574AF	IC	2	<R>
IC8051	AN78L09	IC	1	<R>
IC8052	AN78L05	IC	1	<R>
IC8053-55	NJM4565MD	IC	3	<R>
IC8056	MC74HC574AF	IC	1	<R>
IC8057	MB40778PF	IC	1	<R>
IC8101	CXD1229Q	IC	1	<R>
IC8102	SN74LS123NS	IC	1	<R>
IC8104	SC371026FU	IC	1	<R>
IC8109	MC74HC86F	IC	1	<R>
IC8110	MC74HC00AF	IC	1	<R>
IC8112	SN74LS221NS	IC	1	<R>
IC8113	SN74LS123NS	IC	1	<R>
IC8114,15	TC7S14F	IC	2	<R>
IC8116	UPD65612BY09	IC	1	<R>
IC8118	SN74LS221NS	IC	1	<R>
IC8119	MC74HC4053F	IC	1	<R>
IC8120	MC74HC74AF	IC	1	<R>
IC8121	MC74HC00AF	IC	1	<R>
IC8122	MC74HCU04F	IC	1	<R>
IC8123	MC74HC157AF	IC	1	<R>
IC8201	NJM78L09UA	IC	1	<R>
IC8202	NJM082BM	IC	1	<R>
IC8203	MC14577CF	IC	1	<R>
IC8204	NJM082BM	IC	1	<R>
IC8205	MC14577CF	IC	1	<R>
IC8206	NJM082BM	IC	1	<R>
IC8207,08	TC7S66F	IC	2	<R>
IC8210	TC7S66F	IC	1	<R>
IC8211	MC74HC08AF	IC	1	<R>
IC8212	MC74HC32AF	IC	1	<R>
IC8301	ZA4001	IC	1	<R>
IC8302	SC371026FU	IC	1	<R>
IC8303,04	MB81C1501PF	IC	2	<R>
IC8306	MC74HC86F	IC	1	<R>
IC8308	AN78L05	IC	1	<R>
IC8309	MC74HC4053F	IC	1	<R>
IC8312	AN78L05	IC	1	<R>
IC8401	CG24143-4148	IC	1	<R>
IC8402	MC74HC32AF	IC	1	<R>
IC8403	TC7S32F	IC	1	<R>
IC8404	MC74HC08AF	IC	1	<R>
IC8501	MN6755240H7N	IC	1	<R>
IC8502	LM358PS	IC	1	<R>
IC8503	MC14070BF	IC	1	<R>
IC8504	MN1382-R	IC	1	<R>
IC8506	BA225F	IC	1	<R>
L8001	VLQ0319K101	COIL 100UH	1	

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
L8002	VLF1016A223	COIL	1	
L8052,53	VLQ0319K101	COIL 100UH	2	
L8101	VLQ0319K101	COIL 100UH	1	
L8102	VLQ0133J471	COIL 470UH	1	
L8103	VLQ0163J4R7	COIL	1	
L8104	VLQ0319K101	COIL 100UH	1	
L8105	VLQ0163J3R3	COIL 3.3UH	1	
L8201-03	VLQ0319K101	COIL 100UH	3	
L8550,51	VLQ0319K1R0	COIL	2	
P934	VJP3176B100	CONNECTOR	1	
Q8101	MSD601-R	TRANSISTOR	1	<R>
Q8102	MSB709-R	TRANSISTOR	1	<R>
Q8103	MSD601-R	TRANSISTOR	1	<R>
Q8201-07	MSD601-R	TRANSISTOR	7	<R>
QR8101	MRN1404	TRANSISTOR	1	<R>
QR8104	MRN2402	TRANSISTOR	1	<R>
QR8105	MRN1404	TRANSISTOR	1	<R>
QR8501,02	MRN1404	TRANSISTOR	2	<R>
QR8503-05	MRN1402	TRANSISTOR	3	<R>
R1	ERJ6GEYJ303	M.RESISTOR CH 1/16W 30K	1	
R2	ERJ6GEYJ393	M.RESISTOR CH 1/10W 39K	1	
R3	ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	1	
R5,6	ERJ6GEY0R00	M.RESISTOR CH 1/10W 0	2	
R9	ERJ6GEY0R00	M.RESISTOR CH 1/10W 0	1	
R10	ERJ6GEYJ102	M.RESISTOR CH 1/10W 1K	1	
R11	ERJ6GEY0R00	M.RESISTOR CH 1/10W 0	1	
R8009	ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	1	
R8010,11	ERJ6GEY0R00	M.RESISTOR CH 1/10W 0	2	
R8051	ERJ6GEYJ303	M.RESISTOR CH 1/16W 30K	1	
R8052	ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	1	
R8053	ERJ6GEYG153	M.RESISTOR CH 1/10W 15K	1	
R8055	ERJ6GEYG153	M.RESISTOR CH 1/10W 15K	1	
R8056	ERJ6GEYJ272	M.RESISTOR CH 1/10W 2.7K	1	
R8057	ERJ6GEYG333	M.RESISTOR CH 1/10W 33K	1	
R8060	ERJ6GEYJ203	M.RESISTOR CH 1/10W 20K	1	
R8064	ERJ6GEYJ223	M.RESISTOR CH 1/10W 22K	1	
R8066	ERJ6GEYJ471	M.RESISTOR CH 1/10W 470	1	
R8067	ERJ6GEYJ223	M.RESISTOR CH 1/10W 22K	1	
R8072-79	ERJ6GEYJ152	M.RESISTOR CH 1/10W 1.5K	8	
R8080,81	ERJ6GEYJ105	M.RESISTOR CH 1/10W 1M	2	
R8082	ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	1	
R8083	ERJ6GEYJ392	M.RESISTOR CH 1/10W 3.9K	1	
R8084	ERJ6GEYJ183	M.RESISTOR CH 1/10W 18K	1	
R8085	ERJ6GEYJ332	M.RESISTOR CH 1/10W 3.3K	1	
R8101	ERJ6GEYJ104	M.RESISTOR CH 1/10W 100K	1	
R8102	ERJ6GEYG153	M.RESISTOR CH 1/10W 15K	1	
R8103	ERJ6GEYJ222	M.RESISTOR CH 1/10W 2.2K	1	
R8104	ERJ6GEYJ102	M.RESISTOR CH 1/10W 1K	1	
R8105	ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	1	
R8106,07	ERJ6GEYG333	M.RESISTOR CH 1/10W 33K	2	
R8108	ERJ6GEYJ105	M.RESISTOR CH 1/10W 1M	1	
R8109	ERJ6GEYG333	M.RESISTOR CH 1/10W 33K	1	
R8110	ERJ6GEYJ471	M.RESISTOR CH 1/10W 470	1	
R8111	ERJ6GEYJ152	M.RESISTOR CH 1/10W 1.5K	1	
R8112	ERJ6GEYJ101	M.RESISTOR CH 1/10W 100	1	
R8113	ERJ6GEYJ102	M.RESISTOR CH 1/10W 1K	1	
R8114	ERJ6GEYJ680	M.RESISTOR CH 1/10W 68	1	
R8115	ERJ6GEYJ222	M.RESISTOR CH 1/10W 2.2K	1	
R8116	ERJ6GEYJ102	M.RESISTOR CH 1/10W 1K	1	
R8117	ERJ6GEYJ222	M.RESISTOR CH 1/10W 2.2K	1	
R8118	ERJ6GEYJ121	M.RESISTOR CH 1/10W 120	1	
R8119	ERJ6GEYJ273	M.RESISTOR CH 1/10W 27K	1	
R8120	ERJ6GEYJ473	M.RESISTOR CH 1/10W 47K	1	

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
R8121	ERJ6GEY0R00	M.RESISTOR CH 1/10W 0	1	
R8122	ERJ6GEYJ102	M.RESISTOR CH 1/10W 1K	1	
R8124	ERJ6GEYJ332	M.RESISTOR CH 1/10W 3.3K	1	
R8125	ERJ6GEYG333	M.RESISTOR CH 1/10W 33K	1	
R8126	ERJ6GEYJ684	M.RESISTOR CH 1/10W 680K	1	
R8128	ERJ6GEYJ272	M.RESISTOR CH 1/10W 2.7K	1	
R8131	ERJ6GEYJ123	M.RESISTOR CH 1/10W 12K	1	
R8132	ERJ6GEYJ273	M.RESISTOR CH 1/10W 27K	1	
R8133	ERJ6GEYJ182	M.RESISTOR CH 1/10W 1.8K	1	
R8138	ERJ6GEYJ471	M.RESISTOR CH 1/10W 470	1	
R8139	ERJ6GEYJ223	M.RESISTOR CH 1/10W 22K	1	
R8147,48	ERJ6GEYJ101	M.RESISTOR CH 1/10W 100	2	
R8149	ERJ6GEYJ222	M.RESISTOR CH 1/10W 2.2K	1	
R8152	ERJ6GEY0R00	M.RESISTOR CH 1/10W 0	1	
R8153	ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	1	
R8154	ERJ6GEY0R00	M.RESISTOR CH 1/10W 0	1	
R8156	ERJ6GEYJ683	M.RESISTOR CH 1/10W 68K	1	
R8157	ERJ6GEYG153	M.RESISTOR CH 1/10W 15K	1	
R8158	ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	1	
R8159	ERJ6GEYJ105	M.RESISTOR CH 1/10W 1M	1	
R8187	ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	1	
R8202	ERJ6GEYG333	M.RESISTOR CH 1/10W 33K	1	
R8203	ERJ6GEYJ123	M.RESISTOR CH 1/10W 12K	1	
R8205	ERJ6GEYJ273	M.RESISTOR CH 1/10W 27K	1	
R8207	ERJ6GEYJ102	M.RESISTOR CH 1/10W 1K	1	
R8208	ERJ6GEYJ224	M.RESISTOR CH 1/10W 220K	1	
R8209	ERJ6GEY0R00	M.RESISTOR CH 1/10W 0	1	
R8211	ERJ6GEYJ104	M.RESISTOR CH 1/10W 100K	1	
R8212	ERJ6GEYJ273	M.RESISTOR CH 1/10W 27K	1	
R8213	ERJ6GEYJ152	M.RESISTOR CH 1/10W 1.5K	1	
R8214	ERJ6GEYJ392	M.RESISTOR CH 1/10W 3.9K	1	
R8215	ERJ6GEYJ101	M.RESISTOR CH 1/10W 100	1	
R8216	ERJ6GEYJ105	M.RESISTOR CH 1/10W 1M	1	
R8218,19	ERJ6GEY0R00	M.RESISTOR CH 1/10W 0	2	
R8221	ERJ6GEYJ273	M.RESISTOR CH 1/10W 27K	1	
R8223	ERJ6GEYJ102	M.RESISTOR CH 1/10W 1K	1	
R8225	ERJ6GEY0R00	M.RESISTOR CH 1/10W 0	1	
R8227	ERJ6GEYJ473	M.RESISTOR CH 1/10W 47K	1	
R8228	ERJ6GEYJ273	M.RESISTOR CH 1/10W 27K	1	
R8229	ERJ6GEYJ152	M.RESISTOR CH 1/10W 1.5K	1	
R8230	ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	1	
R8231	ERJ6GEY0R00	M.RESISTOR CH 1/10W 0	1	
R8232	ERJ6GEYJ105	M.RESISTOR CH 1/10W 1M	1	
R8235	ERJ6GEYJ273	M.RESISTOR CH 1/10W 27K	1	
R8236	ERJ6GEYJ102	M.RESISTOR CH 1/10W 1K	1	
R8238	ERJ6GEY0R00	M.RESISTOR CH 1/10W 0	1	
R8240	ERJ6GEYJ473	M.RESISTOR CH 1/10W 47K	1	
R8241	ERJ6GEYJ273	M.RESISTOR CH 1/10W 27K	1	
R8242	ERJ6GEYJ152	M.RESISTOR CH 1/10W 1.5K	1	
R8243	ERJ6GEYG153	M.RESISTOR CH 1/10W 15K	1	
R8244	ERJ6GEY0R00	M.RESISTOR CH 1/10W 0	1	
R8245	ERJ6GEYJ105	M.RESISTOR CH 1/10W 1M	1	
R8246	ERJ6GEYJ152	M.RESISTOR CH 1/10W 1.5K	1	
R8247	ERJ6GEYJ392	M.RESISTOR CH 1/10W 3.9K	1	
R8248	ERJ6GEYJ223	M.RESISTOR CH 1/10W 22K	1	
R8249	ERJ6GEYJ152	M.RESISTOR CH 1/10W 1.5K	1	
R8250	ERJ6GEYJ392	M.RESISTOR CH 1/10W 3.9K	1	
R8251,52	ERJ6GEYJ223	M.RESISTOR CH 1/10W 22K	2	
R8253	ERJ6GEYJ152	M.RESISTOR CH 1/10W 1.5K	1	
R8254	ERJ6GEYJ392	M.RESISTOR CH 1/10W 3.9K	1	
R8255	ERJ6GEYJ152	M.RESISTOR CH 1/10W 1.5K	1	
R8257	ERJ6GEY0R00	M.RESISTOR CH 1/10W 0	1	
R8258-60	ERJ6GEYJ101	M.RESISTOR CH 1/10W 100	3	
R8261-63	ERJ6GEY0R00	M.RESISTOR CH 1/10W 0	3	
R8303	ERJ6GEYJ222	M.RESISTOR CH 1/10W 2.2K	1	
R8304	ERJ6GEYJ392	M.RESISTOR CH 1/10W 3.9K	1	
R8305	ERJ6GEYJ561	M.RESISTOR CH 1/10W 560	1	
R8309	ERJ6GEY0R00	M.RESISTOR CH 1/10W 0	1	
R8311	ERJ6GEYJ182	M.RESISTOR CH 1/10W 1.8K	1	
R8313-16	ERJ6GEY0R00	M.RESISTOR CH 1/10W 0	4	
R8317	ERJ6GEYJ102	M.RESISTOR CH 1/10W 1K	1	
R8420	ERJ6GEY0R00	M.RESISTOR CH 1/10W 0	1	
R8434	ERJ6GEYJ471	M.RESISTOR CH 1/10W 470	1	
R8435	ERJ6GEYJ332	M.RESISTOR CH 1/10W 3.3K	1	
R8501	ERJ6GEYJ222	M.RESISTOR CH 1/10W 2.2K	1	

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
R8502,03	ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	2	
R8504	ERJ6GEYG471	M.RESISTOR CH 1/10W 470	1	
R8505	ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	1	
R8506	ERJ6GEYJ124	M.RESISTOR CH 1/10W 120K	1	
R8507	ERJ6GEYJ564	M.RESISTOR CH 1/10W 560K	1	
R8508	ERJ6GEYJ222	M.RESISTOR CH 1/10W 2.2K	1	
R8509	ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	1	
R8510	ERJ6GEYJ222	M.RESISTOR CH 1/10W 2.2K	1	
R8511-18	ERJ6GEYJ471	M.RESISTOR CH 1/10W 470	8	
R8520	ERJ6GEYJ222	M.RESISTOR CH 1/10W 2.2K	1	
R8521	ERJ6GEYJ101	M.RESISTOR CH 1/10W 100	1	
R8523-25	ERJ6GEYJ101	M.RESISTOR CH 1/10W 100	3	
R8526	ERJ6GEYG272	M.RESISTOR CH 1/10W 2.7K	1	
R8529,30	ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	2	
R8531	ERJ6GEYJ223	M.RESISTOR CH 1/10W 22K	1	
R8550	ERJ6GEYJ471	M.RESISTOR CH 1/10W 470	1	
R8551-53	ERJ6GEYJ101	M.RESISTOR CH 1/10W 100	3	
R8554-56	ERJ6GEYJ471	M.RESISTOR CH 1/10W 470	3	
R8557-60	ERJ6GEYJ101	M.RESISTOR CH 1/10W 100	4	
R8561-66	ERJ6GEYJ471	M.RESISTOR CH 1/10W 470	6	
R8567-69	ERJ6GEYJ101	M.RESISTOR CH 1/10W 100	3	
R8570-75	ERJ6GEYJ471	M.RESISTOR CH 1/10W 470	6	
R8577	ERJ6GEYJ101	M.RESISTOR CH 1/10W 100	1	
R8578-81	ERJ6GEYJ471	M.RESISTOR CH 1/10W 470	4	
VC8101	VCV0047	TRIMMER	1	
VR8001	EVN32CA00B53	V.RESISTOR 5K	1	
VR8002	EVN32CA00B23	V.RESISTOR 2K	1	
VR8101	EVM7JSX30B13	V.RESISTOR	1	
VR8102,03	EVM7DGA00B23	V.RESISTOR 2K	2	
VR8201	EVN32CA00B53	V.RESISTOR 5K	1	
VR8202	EVN32CA00B13	V.RESISTOR 1K	1	
VR8203	EVM7DGA00B53	V.RESISTOR 5K	1	
VR8204	EVM7DGA00B13	V.RESISTOR 1K	1	
VR8205	EVN32CA00B13	V.RESISTOR 1K	1	
VR8301	EVM7JSX30B13	V.RESISTOR	1	
VR8302	EVN32CA00B13	V.RESISTOR 1K	1	
VR8501	EVN32CA00B54	V.RESISTOR 50K	1	
X8101	VSX0668	CRYSTAL OSCILLATOR	1	<R>
X8501	VSX0519	CRYSTAL OSCILLATOR	1	<R>

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
	VEP08160A	P.C.BOARD W/COMPONENT		
		TBC (2)		
C8601,02	ECUM1H103KBN	C.CAPACITOR CH 50V 0.01U	2	
C8603	ECUM1H181JCN	C.CAPACITOR CH 50V 180P	1	
C8604	ECUM1H103KBN	C.CAPACITOR CH 50V 0.01U	1	
C8605	ECUM1E104ZFN	C.CAPACITOR CH 25V 0.1U	1	
C8606,07	ECEV1CV470Q	E.CAPACITOR CH 16V 47U	2	
C8608	ECUM1E104ZFN	C.CAPACITOR CH 25V 0.1U	1	
C8609	ECUM1H180JCN	C.CAPACITOR CH 50V 18P	1	
C8610	ECUM1H680JCN	C.CAPACITOR CH 50V 68P	1	
C8611,12	ECUM1E104ZFN	C.CAPACITOR CH 25V 0.1U	2	
C8613	ECEV1HN010	E.CAPACITOR 50V 1U	1	
C8614	ECUM1H330JCN	C.CAPACITOR CH 50V 33P	1	
C8615	ECUM1E104ZFN	C.CAPACITOR CH 25V 0.1U	1	
C8616,17	ECUM1H101JCN	C.CAPACITOR CH 50V 100P	2	
C8618	ECUM1H220JCN	C.CAPACITOR CH 50V 22P	1	
C8619	ECUM1H470JCN	C.CAPACITOR CH 50V 47P	1	
C8620-22	ECUM1E104ZFN	C.CAPACITOR CH 25V 0.1U	3	
C8623	ECUM1H390JCN	C.CAPACITOR CH 50V 39P	1	
C8624	ECUM1E104ZFN	C.CAPACITOR CH 25V 0.1U	1	
C8625	ECEV1CV470Q	E.CAPACITOR CH 16V 47U	1	
C8626,27	ECUM1H150JCN	C.CAPACITOR CH 50V 15P	2	
C8628	ECEV0JV101	E.CAPACITOR 6.3V 100U	1	
C8629	ECUM1H103KBN	C.CAPACITOR CH 50V 0.01U	1	
C8630	ECEV1CV470Q	E.CAPACITOR CH 16V 47U	1	
C8631	ECUM1H103KBN	C.CAPACITOR CH 50V 0.01U	1	
C8632	ECEV1CV470Q	E.CAPACITOR CH 16V 47U	1	
C8633	ECUM1H103KBN	C.CAPACITOR CH 50V 0.01U	1	
C8634	ECEV1CV470Q	E.CAPACITOR CH 16V 47U	1	
C8635	ECUM1H103KBN	C.CAPACITOR CH 50V 0.01U	1	
C8636	ECEV1CV470Q	E.CAPACITOR CH 16V 47U	1	
C8637	ECUM1H103KBN	C.CAPACITOR CH 50V 0.01U	1	
C8640	ECUM1E104ZFN	C.CAPACITOR CH 25V 0.1U	1	
C8641	ECUM1H103KBN	C.CAPACITOR CH 50V 0.01U	1	
C8642	ECUM1E104ZFN	C.CAPACITOR CH 25V 0.1U	1	
C8643	ECEV1HN010	E.CAPACITOR 50V 1U	1	
C8644	ECUM1E104ZFN	C.CAPACITOR CH 25V 0.1U	1	
C8645	ECEV1CV470Q	E.CAPACITOR CH 16V 47U	1	
C8656-60	ECUM1E104ZFN	C.CAPACITOR CH 25V 0.1U	5	
C8662	ECUM1H103KBN	C.CAPACITOR CH 50V 0.01U	1	
C8663	ECEV1CV470Q	E.CAPACITOR CH 16V 47U	1	
C8664	ECUM1H103KBN	C.CAPACITOR CH 50V 0.01U	1	
C8665	ECEV1CV470Q	E.CAPACITOR CH 16V 47U	1	
C8671	ECEV1CV470Q	E.CAPACITOR CH 16V 47U	1	
C8672	ECUM1E104ZFN	C.CAPACITOR CH 25V 0.1U	1	
C8673	ECUM1H820JCN	C.CAPACITOR CH 50V 82P	1	
C8674	ECEV1CV100	E.CAPACITOR 16V 10U	1	
C8675	ECUM1E104ZFN	C.CAPACITOR CH 25V 0.1U	1	
C8676	ECUM1H103KBN	C.CAPACITOR CH 50V 0.01U	1	
C8677	ECUM1E104ZFN	C.CAPACITOR CH 25V 0.1U	1	
C8678	ECEV1VAN2R2	E.CAPACITOR CH 35V 2.2U	1	
C8679	ECUM1E104ZFN	C.CAPACITOR CH 25V 0.1U	1	
C8680	ECEV1CV470Q	E.CAPACITOR CH 16V 47U	1	
C8681	ECUM1E104ZFN	C.CAPACITOR CH 25V 0.1U	1	
C8682	ECUM1H470JCN	C.CAPACITOR CH 50V 47P	1	
C8683,84	ECUM1E104ZFN	C.CAPACITOR CH 25V 0.1U	2	
C8685	ECUM1H102JCN	C.CAPACITOR CH 50V 1000P	1	
C8686,87	ECUM1H470JCN	C.CAPACITOR CH 50V 47P	2	
C8688	ECUM1H103KBN	C.CAPACITOR CH 50V 0.01U	1	
C8689	ECUM1E104ZFN	C.CAPACITOR CH 25V 0.1U	1	
C8690	ECEV1CV100	E.CAPACITOR 16V 10U	1	
C8691	ECUM1H030DCN	C.CAPACITOR CH 50V 3P	1	
C8692	ECUM1H150JCN	C.CAPACITOR CH 50V 15P	1	
C8693,94	ECUM1E104ZFN	C.CAPACITOR CH 25V 0.1U	2	
C8701	ECUM1E104ZFN	C.CAPACITOR CH 25V 0.1U	1	
C8702	ECEV1CN100Q	E.CAPACITOR CH 16V 10U	1	
C8703	ECUM1H102JCN	C.CAPACITOR CH 50V 1000P	1	
C8704	ECUM1H150JCN	C.CAPACITOR CH 50V 15P	1	
C8705	ECUM1E104ZFN	C.CAPACITOR CH 25V 0.1U	1	
C8706	ECEV1CV100	E.CAPACITOR 16V 10U	1	
C8707	ECUM1E104ZFN	C.CAPACITOR CH 25V 0.1U	1	
C8708	ECEV1CV100	E.CAPACITOR 16V 10U	1	

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
C8709-13	ECUM1E104ZFN	C.CAPACITOR CH 25V 0.1U	5	
C8714	ECUM1H220JCN	C.CAPACITOR CH 50V 22P	1	
C8715	ECUM1H820JCN	C.CAPACITOR CH 50V 82P	1	
C8716-21	ECUM1E104ZFN	C.CAPACITOR CH 25V 0.1U	6	
C8722	ECUM1H102JCN	C.CAPACITOR CH 50V 1000P	1	
C8723	ECUM1H151JCN	C.CAPACITOR CH 50V 150P	1	
C8801	ECUM1H101JCN	C.CAPACITOR CH 50V 100P	1	
C8802	ECUM1H221JCN	C.CAPACITOR CH 50V 220P	1	
C8803	ECEV0JV470	E.CAPACITOR 6.3V 47U	1	
C8804,05	ECUM1E104ZFN	C.CAPACITOR CH 25V 0.1U	2	
C8806	ECEV0JV470	E.CAPACITOR 6.3V 47U	1	
C8807,08	ECUM1E104ZFN	C.CAPACITOR CH 25V 0.1U	2	
C8809,10	ECEV0GV470	E.CAPACITOR 4V 47U	2	
C8813-15	ECUM1E104ZFN	C.CAPACITOR CH 25V 0.1U	3	
C8816	ECEV0GV470	E.CAPACITOR 4V 47U	1	
C8819	ECUM1E104ZFN	C.CAPACITOR CH 25V 0.1U	1	
C8820	ECUM1H151JCN	C.CAPACITOR CH 50V 150P	1	
C8821	ECUM1H471JCN	C.CAPACITOR CH 50V 470P	1	
C8822,23	ECEV1HV010	E.CAPACITOR 50V 1U	2	
C8824	ECUM1H180JCN	C.CAPACITOR CH 50V 18P	1	
C8826	ECUM1H101JCN	C.CAPACITOR CH 50V 100P	1	
C8827	ECUM1E104ZFN	C.CAPACITOR CH 25V 0.1U	1	
C8828	ECEV0JV101	E.CAPACITOR 6.3V 100U	1	
C8829	ECUM1E104ZFN	C.CAPACITOR CH 25V 0.1U	1	
C8830	ECEV0JV101	E.CAPACITOR 6.3V 100U	1	
C8832	ECUM1E104ZFN	C.CAPACITOR CH 25V 0.1U	1	
C8833	ECUM1H150JCN	C.CAPACITOR CH 50V 15P	1	
C8835	ECEV0GV470	E.CAPACITOR 4V 47U	1	
C8836,37	ECUM1E104ZFN	C.CAPACITOR CH 25V 0.1U	2	
C8840	ECEV1CV470Q	E.CAPACITOR CH 16V 47U	1	
C8841	ECEV1CV220	E.CAPACITOR 16V 22U	1	
C8842,43	ECUM1E104ZFN	C.CAPACITOR CH 25V 0.1U	2	
C8846	ECUM1H103ZFN	C.CAPACITOR 50V 0.01U	1	
C8847	ECUM1E473KBN	C.CAPACITOR CH 25V 0.047U	1	
C8848	ECEV1CV100	E.CAPACITOR 16V 10U	1	
C8849-51	ECUM1E104ZFN	C.CAPACITOR CH 25V 0.1U	3	
C8852	ECEV0GV470	E.CAPACITOR 4V 47U	1	
C8853	ECUM1E104ZFN	C.CAPACITOR CH 25V 0.1U	1	
C8854	ECEV1HV010	E.CAPACITOR 50V 1U	1	
C8855	ECEV0JV470	E.CAPACITOR 6.3V 47U	1	
C8856	ECUM1E473KBN	C.CAPACITOR CH 25V 0.047U	1	
C8857	ECUM1E104ZFN	C.CAPACITOR CH 25V 0.1U	1	
C8859-62	ECUM1E104ZFN	C.CAPACITOR CH 25V 0.1U	4	
C8863	ECEV1CV100	E.CAPACITOR 16V 10U	1	
C8864	ECUM1E473KBN	C.CAPACITOR CH 25V 0.047U	1	
C8865	ECUM1H330JCN	C.CAPACITOR CH 50V 33P	1	
C8866	ECUM1H271JCN	C.CAPACITOR CH 50V 270P	1	
C8867	ECUM1H680JCN	C.CAPACITOR CH 50V 68P	1	
C8868	ECUM1H070DCN	C.CAPACITOR CH 50V 7P	1	
C8869	ECUM1H220JCN	C.CAPACITOR CH 50V 22P	1	
C8870	ECUM1H121JCN	C.CAPACITOR CH 50V 120P	1	
C8871	ECUM1H100DCN	C.CAPACITOR CH 50V 10P	1	
C8882,83	ECUM1H680JCN	C.CAPACITOR CH 50V 68P	2	
C8884	ECUM1E104ZFN	C.CAPACITOR CH 25V 0.1U	1	
C8885	ECEV0JV470	E.CAPACITOR 6.3V 47U	1	
C8886	ECUM1E104ZFN	C.CAPACITOR CH 25V 0.1U	1	
C8887	ECEV0JV470	E.CAPACITOR 6.3V 47U	1	
C8889	ECUM1E104ZFN	C.CAPACITOR CH 25V 0.1U	1	
C8890,91	ECUM1H220JCN	C.CAPACITOR CH 50V 22P	2	
C8892	ECUM1E104ZFN	C.CAPACITOR CH 25V 0.1U	1	
C8893,94	ECUM1H220JCN	C.CAPACITOR CH 50V 22P	2	
C8895	ECEV0JV470	E.CAPACITOR 6.3V 47U	1	
C8896,97	ECUM1E104ZFN	C.CAPACITOR CH 25V 0.1U	2	
C8898,99	ECUM1H220JCN	C.CAPACITOR CH 50V 22P	2	
C8900	ECEV0JV470	E.CAPACITOR 6.3V 47U	1	
C8901,02	ECUM1E104ZFN	C.CAPACITOR CH 25V 0.1U	2	
C8903	ECUM1H820JCN	C.CAPACITOR CH 50V 82P	1	
C8904,05	ECUM1E104ZFN	C.CAPACITOR CH 25V 0.1U	2	
C8906	ECUM1H100DCN	C.CAPACITOR CH 50V 10P	1	
C8907,08	ECUM1E104ZFN	C.CAPACITOR CH 25V 0.1U	2	
C8909	ECUM1H271JCN	C.CAPACITOR CH 50V 270P	1	
C8910	ECUM1H221JCN	C.CAPACITOR CH 50V 220P	1	
C8911,12	ECUM1E104ZFN	C.CAPACITOR CH 25V 0.1U	2	
C8913	ECUM1H181JCN	C.CAPACITOR CH 50V 180P	1	
C8914	ECUM1E104ZFN	C.CAPACITOR CH 25V 0.1U	1	

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
C8915	ECUM1H820JCN	C.CAPACITOR CH 50V 82P	1	
C8920	ECUM1E104ZFN	C.CAPACITOR CH 25V 0.1U	1	
C8921	ECEV1CV100	E.CAPACITOR 16V 10U	1	
C8922	ECUM1E104ZFN	C.CAPACITOR CH 25V 0.1U	1	
C8923	ECEV0GV470	E.CAPACITOR 4V 47U	1	
C8924	ECEV0JV470	E.CAPACITOR 6.3V 47U	1	
C8926-28	ECUM1E104ZFN	C.CAPACITOR CH 25V 0.1U	3	
C8930	ECUM1E104ZFN	C.CAPACITOR CH 25V 0.1U	1	
C8932	ECUM1H470JCN	C.CAPACITOR CH 50V 47P	1	
C8938	ECEV1CV100	E.CAPACITOR 16V 10U	1	
C8939	ECUM1E104ZFN	C.CAPACITOR CH 25V 0.1U	1	
C8940,41	ECUM1H120JCN	C.CAPACITOR CH 50V 12P	2	
D8601	MA151WK	DIODE	1	<R>
D8604,05	MA723	DIODE	2	<R>
D8671	MA151K	DIODE	1	<R>
D8672	MA335-R	DIODE	1	<R>
D8673	MA151K	DIODE	1	<R>
D8701	MA151K	DIODE	1	<R>
D8801,02	MA335-R	DIODE	2	<R>
D8803	MA151K	DIODE	1	<R>
D8804	MA723	DIODE	1	<R>
FL8601-05	VLF1016A223	FILTER	5	
FL8671	VLF1016A223	FILTER	1	
FL8701	VLF1016A223	FILTER	1	
FL8801	VLF0921	FILTER	1	
FL8802,03	VLF0757	FILTER	2	
IC8601	AN91A12S	IC	1	<R>
IC8602	NE521D	IC	1	<R>
IC8603,04	MN74HC221S	IC	2	<R>
IC8605	NJM082BM	IC	1	<R>
IC8606	MN74HC221S	IC	1	<R>
IC8607	MC74HC04AF	IC	1	<R>
IC8608	MC74HC125AF	IC	1	<R>
IC8609	NJM082BM	IC	1	<R>
IC8613	NJM78L09UA	IC	1	<R>
IC8671	MC14053BF	IC	1	<R>
IC8672	NJM082BM	IC	1	<R>
IC8673	NE521D	IC	1	<R>
IC8674	NJM78L09UA	IC	1	<R>
IC8701	UPD65650J203	IC	1	<R>
IC8702	MN74HC221S	IC	1	<R>
IC8703	MC74HC04AF	IC	1	<R>
IC8704	TC7S08F	IC	1	<R>
IC8705	NJM082BM	IC	1	<R>
IC8706	TC7W04F	IC	1	<R>
IC8801	MC14577CF	IC	1	<R>
IC8802	BA7655AF	IC	1	<R>
IC8803	MM74HC221AM	IC	1	<R>
IC8804	MC14577CF	IC	1	<R>
IC8805	NJM082BM	IC	1	<R>
IC8806	M51272FP	IC	1	<R>
IC8807	TC7S04F	IC	1	<R>
IC8808	MC14053BF	IC	1	<R>
IC8809	MC14013BF	IC	1	<R>
IC8810	LM358PS	IC	1	<R>
IC8811	TC4S66F	IC	1	<R>
IC8812	LM358PS	IC	1	<R>
L8601	VLQ0319K101	COIL 100UH	1	
L8602	VLQ0319K221	COIL 220UH	1	
L8603	VLQ0163J680	COIL 68UH	1	
L8604	VLQ0319K470	COIL 47UH	1	
L8605,06	VLP0133	COIL	2	
L8612	VLQ0319K470	COIL 47UH	1	

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
L8614	VLQ0319K470	COIL 47UH	1	
L8671	VLQ0319K470	COIL 47UH	1	
L8672	VLQ0163J221	COIL 220UH	1	
L8673	VLQ0319K470	COIL 47UH	1	
L8674	VLP0133	COIL	1	
L8701	VLQ0319K470	COIL 47UH	1	
L8702	VLP0145	COIL	1	
L8801,02	VLQ0319K101	COIL 100UH	2	
L8803	VLQ0163J180	COIL	1	
L8804	VLQ0163J560	COIL 56UH	1	
L8805	VLQ0163J470	COIL 47UH	1	
L8806,07	VLQ0319K101	COIL 100UH	2	
L8812	VLQ0319K101	COIL 100UH	1	
L8813	VLQ0163J270	COIL 27UH	1	
L8814	VLQ0163J6R8	COIL 6.8UH	1	
L8815	VLQ0163J5R6	COIL 5.6UH	1	
L8818,19	VLQ0319K101	COIL 100UH	2	
L8820,21	VLQ0163J470	COIL 47UH	2	
L8822	VLQ0319K101	COIL 100UH	1	
L8823	VLQ0163J470	COIL 47UH	1	
L8824-27	VLQ0319K101	COIL 100UH	4	
L8828,29	VLQ0163J100	COIL 10UH	2	
P8933	VJP3176B100	CONNECTOR	1	
Q8671	MSB709-R	TRANSISTOR	1	<R>
Q8672,73	2SK608-R	TRANSISTOR	2	<R>
Q8701	MSD601-R	TRANSISTOR	1	<R>
Q8801-03	MSD601-R	TRANSISTOR	3	<R>
Q8804	MSB709-R	TRANSISTOR	1	<R>
Q8805,06	MSD601-R	TRANSISTOR	2	<R>
Q8808,09	MSD601-R	TRANSISTOR	2	<R>
Q8810	2SA1022-B	TRANSISTOR	1	<R>
Q8811	MSD601-R	TRANSISTOR	1	<R>
Q8812	2SA1022-B	TRANSISTOR	1	<R>
Q8813-15	MSD601-R	TRANSISTOR	3	<R>
Q8816	MSB709-R	TRANSISTOR	1	<R>
Q8817	MSC2295-B	TRANSISTOR	1	<R>
Q8818,19	MSB709-R	TRANSISTOR	2	<R>
Q8820	MSC2295-B	TRANSISTOR	1	<R>
Q8821	MSB709-R	TRANSISTOR	1	<R>
Q8822	MSC2295-B	TRANSISTOR	1	<R>
Q8823	MSB709-R	TRANSISTOR	1	<R>
Q8824,25	MSD601-R	TRANSISTOR	2	<R>
Q8827,28	MSD601-R	TRANSISTOR	2	<R>
Q8832	XN1213	TRANSISTOR-TRANSISTOR	1	<R>
R8601	ERJ6GEYJ224	M.RESISTOR CH 1/10W 220K	1	
R8602	ERJ6GEYJ684	M.RESISTOR CH 1/10W 680K	1	
R8603	ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	1	
R8604,05	ERJ6GEYJ822	M.RESISTOR CH 1/10W 8.2K	2	
R8606	ERJ6GEYJ221	M.RESISTOR CH 1/10W 220	1	
R8607-10	ERJ6GEYJ222	M.RESISTOR CH 1/10W 2.2K	4	
R8611	ERJ6GEYJ683	M.RESISTOR CH 1/10W 68K	1	
R8612	ERJ6GEYJ184	M.RESISTOR CH 1/10W 180K	1	
R8613,14	ERJ6GEYJ222	M.RESISTOR CH 1/10W 2.2K	2	
R8615	ERJ6GEYJ563	M.RESISTOR CH 1/10W 56K	1	
R8616	ERJ6GEYJ822	M.RESISTOR CH 1/10W 8.2K	1	
R8617	ERJ6GEYJ682	M.RESISTOR CH 1/10W 6.8K	1	
R8618	ERJ6GEYJ563	M.RESISTOR CH 1/10W 56K	1	
R8619	ERJ6GEYJ684	M.RESISTOR CH 1/10W 680K	1	
R8620	ERJ6GEYJ392	M.RESISTOR CH 1/10W 3.9K	1	
R8621	ERJ6GEYJ272	M.RESISTOR CH 1/10W 2.7K	1	
R8622,23	ERJ6GEYJ102	M.RESISTOR CH 1/10W 1K	2	
R8624	ERJ6GEYJ122	M.RESISTOR CH 1/10W 1.2K	1	
R8625	ERJ6GEYJ823	M.RESISTOR CH 1/10W 82K	1	
R8626	ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	1	
R8628	ERJ6GEYG153	M.RESISTOR CH 1/10W 15K	1	
R8630	ERJ6GEYJ104	M.RESISTOR CH 1/10W 100K	1	

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
R8631	ERJ6GEYJ105	M.RESISTOR CH 1/10W 1M	1	
R8635	ERJ6GEYJ473	M.RESISTOR CH 1/10W 47K	1	
R8671	ERJ6GEYJ222	M.RESISTOR CH 1/10W 2.2K	1	
R8672	ERJ6GEYJ152	M.RESISTOR CH 1/10W 1.5K	1	
R8673	ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	1	
R8674	ERJ6GEYJ102	M.RESISTOR CH 1/10W 1K	1	
R8675	ERJ6GEY0R00	M.RESISTOR CH 1/10W 0	1	
R8677	ERJ6GEYG333	M.RESISTOR CH 1/10W 33K	1	
R8678	ERJ6GEYJ273	M.RESISTOR CH 1/10W 27K	1	
R8679	ERJ6GEYJ223	M.RESISTOR CH 1/10W 22K	1	
R8680	ERJ6GEYJ105	M.RESISTOR CH 1/10W 1M	1	
R8681	ERJ6GEYJ102	M.RESISTOR CH 1/10W 1K	1	
R8682	ERJ6GEYJ473	M.RESISTOR CH 1/10W 47K	1	
R8683	ERJ6GEYJ822	M.RESISTOR CH 1/10W 8.2K	1	
R8684	ERJ6GEYG153	M.RESISTOR CH 1/10W 15K	1	
R8685,86	ERJ6GEYJ473	M.RESISTOR CH 1/10W 47K	2	
R8687,88	ERJ6GEYJ332	M.RESISTOR CH 1/10W 3.3K	2	
R8689	ERJ6GEYJ102	M.RESISTOR CH 1/10W 1K	1	
R8690	ERJ6GEYJ272	M.RESISTOR CH 1/10W 2.7K	1	
R8691	ERJ6GEYJ822	M.RESISTOR CH 1/10W 8.2K	1	
R8692	ERJ6GEYJ821	M.RESISTOR CH 1/10W 820	1	
R8693	ERJ6GEYJ152	M.RESISTOR CH 1/10W 1.5K	1	
R8702	ERJ6GEY0R00	M.RESISTOR CH 1/10W 0	1	
R8703	ERJ6GEYJ562	M.RESISTOR CH 1/10W 5.6K	1	
R8704	ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	1	
R8705	ERJ6GEYJ684	M.RESISTOR CH 1/10W 680K	1	
R8706	ERJ6GEYJ273	M.RESISTOR CH 1/10W 27K	1	
R8707	ERJ6GEYJ563	M.RESISTOR CH 1/10W 56K	1	
R8708	ERJ6GEYG472	M.RESISTOR CH 1/10W 4.7K	1	
R8709	ERJ6GEYJ682	M.RESISTOR CH 1/10W 6.8K	1	
R8710	ERJ6GEYJ104	M.RESISTOR CH 1/10W 100K	1	
R8713	ERJ6GEY0R00	M.RESISTOR CH 1/10W 0	1	
R8715	ERJ6GEY0R00	M.RESISTOR CH 1/10W 0	1	
R8717-21	ERJ6GEYJ101	M.RESISTOR CH 1/10W 100	5	
R8722-27	ERJ6GEYJ560	M.RESISTOR CH 1/10W 56	6	
R8728	ERJ6GEYJ102	M.RESISTOR CH 1/10W 1K	1	
R8729	ERJ6GEYJ152	M.RESISTOR CH 1/10W 1.5K	1	
R8731,32	ERJ6GEYJ560	M.RESISTOR CH 1/10W 56	2	
R8733,34	ERJ6GEYJ471	M.RESISTOR CH 1/10W 470	2	
R8735	ERJ6GEYJ560	M.RESISTOR CH 1/10W 56	1	
R8736	ERJ6GEYJ101	M.RESISTOR CH 1/10W 100	1	
R8737	ERJ6GEYJ152	M.RESISTOR CH 1/10W 1.5K	1	
R8739	ERJ6GEY0R00	M.RESISTOR CH 1/10W 0	1	
R8740	ERJ6GEYJ102	M.RESISTOR CH 1/10W 1K	1	
R8741	ERJ6GEYJ104	M.RESISTOR CH 1/10W 100K	1	
R8801,02	ERJ6GEYG102	M.RESISTOR CH 1/10W 1K	2	
R8803	ERJ6GEYJ470	M.RESISTOR CH 1/10W 47	1	
R8804	ERJ6GEYJ332	M.RESISTOR CH 1/10W 3.3K	1	
R8805	ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	1	
R8806	ERJ6GEYJ470	M.RESISTOR CH 1/10W 47	1	
R8807	ERJ6GEYJ821	M.RESISTOR CH 1/10W 820	1	
R8808	ERJ6GEYG472	M.RESISTOR CH 1/10W 4.7K	1	
R8809	ERJ6GEYJ470	M.RESISTOR CH 1/10W 47	1	
R8810-12	ERJ6GEYG102	M.RESISTOR CH 1/10W 1K	3	
R8813	ERJ6GEYJ470	M.RESISTOR CH 1/10W 47	1	
R8814	ERJ6GEYG102	M.RESISTOR CH 1/10W 1K	1	
R8815	ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	1	
R8816	ERJ6GEYG470	M.RESISTOR CH 1/10W 47	1	
R8817	ERJ6GEYJ821	M.RESISTOR CH 1/10W 820	1	
R8818	ERJ6GEYG472	M.RESISTOR CH 1/10W 4.7K	1	
R8822	ERJ6GEYJ471	M.RESISTOR CH 1/10W 470	1	
R8823	ERJ6GEYJ221	M.RESISTOR CH 1/10W 220	1	
R8824	ERJ6GEYJ470	M.RESISTOR CH 1/10W 47	1	
R8825	ERJ6GEYJ271	M.RESISTOR CH 1/10W 270	1	
R8826	ERJ6GEYJ332	M.RESISTOR CH 1/10W 3.3K	1	
R8827	ERJ6GEYJ102	M.RESISTOR CH 1/10W 1K	1	
R8828	ERJ6GEY0R00	M.RESISTOR CH 1/10W 0	1	
R8829	ERJ6GEYJ470	M.RESISTOR CH 1/10W 47	1	
R8830	ERJ6GEYJ332	M.RESISTOR CH 1/10W 3.3K	1	
R8831	ERJ6GEYJ470	M.RESISTOR CH 1/10W 47	1	
R8832	ERJ6GEYJ682	M.RESISTOR CH 1/10W 6.8K	1	
R8833	ERJ6GEYJ102	M.RESISTOR CH 1/10W 1K	1	
R8834	ERJ6GEYJ152	M.RESISTOR CH 1/10W 1.5K	1	
R8836	ERJ6GEYJ561	M.RESISTOR CH 1/10W 560	1	
R8838	ERJ6GEYJ222	M.RESISTOR CH 1/10W 2.2K	1	

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
R8839	ERJ6GEYJ470	M.RESISTOR CH 1/10W 47	1	
R8840	ERJ6GEYG472	M.RESISTOR CH 1/10W 4.7K	1	
R8841	ERJ6GEYJ102	M.RESISTOR CH 1/10W 1K	1	
R8842	ERJ6GEYJ122	M.RESISTOR CH 1/10W 1.2K	1	
R8843	ERJ6GEYJ222	M.RESISTOR CH 1/10W 2.2K	1	
R8844	ERJ6GEY0R00	M.RESISTOR CH 1/10W 0	1	
R8846	ERJ6GEYJ223	M.RESISTOR CH 1/10W 22K	1	
R8849	ERJ6GEYJ122	M.RESISTOR CH 1/10W 1.2K	1	
R8850	ERJ6GEYG103	M.RESISTOR CH 1/10W 10K	1	
R8851	ERJ6GEYG163	M.RESISTOR CH 1/10W 16K	1	
R8853	ERJ6GEYJ332	M.RESISTOR CH 1/10W 3.3K	1	
R8855	ERJ6GEYG103	M.RESISTOR CH 1/10W 10K	1	
R8856	ERJ6GEYG163	M.RESISTOR CH 1/10W 16K	1	
R8857	ERJ6GEY0R00	M.RESISTOR CH 1/10W 0	1	
R8860	ERJ6GEYG301	M.RESISTOR CH 1/10W 300	1	
R8861	ERJ6GEYJ470	M.RESISTOR CH 1/10W 47	1	
R8862	ERJ6GEYG301	M.RESISTOR CH 1/10W 300	1	
R8864,65	ERJ6GEYG472	M.RESISTOR CH 1/10W 4.7K	2	
R8866	VRE0034E122	M.RESISTOR CH 1/10W 1.2K	1	
R8867	VRE0034E272	M.RESISTOR CH 1/10W 2.7K	1	
R8869	ERJ6GEYJ222	M.RESISTOR CH 1/10W 2.2K	1	
R8870	VRE0034E122	M.RESISTOR CH 1/10W 1.2K	1	
R8871	VRE0034E272	M.RESISTOR CH 1/10W 2.7K	1	
R8873	ERJ6GEYJ222	M.RESISTOR CH 1/10W 2.2K	1	
R8875	ERJ6GEYJ102	M.RESISTOR CH 1/10W 1K	1	
R8876	ERJ6GEYG472	M.RESISTOR CH 1/10W 4.7K	1	
R8877	ERJ6GEYJ471	M.RESISTOR CH 1/10W 470	1	
R8878	ERJ6GEYG472	M.RESISTOR CH 1/10W 4.7K	1	
R8880	ERJ6GEYJ102	M.RESISTOR CH 1/10W 1K	1	
R8881	ERJ6GEYJ821	M.RESISTOR CH 1/10W 820	1	
R8882	ERJ6GEYJ471	M.RESISTOR CH 1/10W 470	1	
R8883	ERJ6GEYG472	M.RESISTOR CH 1/10W 4.7K	1	
R8884	ERJ6GEYJ102	M.RESISTOR CH 1/10W 1K	1	
R8885	ERJ6GEY0R00	M.RESISTOR CH 1/10W 0	1	
R8886	ERJ6GEYJ102	M.RESISTOR CH 1/10W 1K	1	
R8887	ERJ6GEYJ470	M.RESISTOR CH 1/10W 47	1	
R8888	ERJ6GEYJ332	M.RESISTOR CH 1/10W 3.3K	1	
R8889	ERJ6GEYJ102	M.RESISTOR CH 1/10W 1K	1	
R8890	ERJ6GEY0R00	M.RESISTOR CH 1/10W 0	1	
R8891	ERJ6GEYJ470	M.RESISTOR CH 1/10W 47	1	
R8892	ERJ6GEYJ102	M.RESISTOR CH 1/10W 1K	1	
R8893	ERJ6GEYJ332	M.RESISTOR CH 1/10W 3.3K	1	
R8894	ERJ6GEYJ821	M.RESISTOR CH 1/10W 820	1	
R8895	ERJ6GEYG472	M.RESISTOR CH 1/10W 4.7K	1	
R8896	ERJ6GEYJ102	M.RESISTOR CH 1/10W 1K	1	
R8897	ERJ6GEYJ181	M.RESISTOR CH 1/10W 180	1	
R8898	ERJ6GEYJ821	M.RESISTOR CH 1/10W 820	1	
R8899	ERJ6GEYJ152	M.RESISTOR CH 1/10W 1.5K	1	
R8900	ERJ6GEYJ470	M.RESISTOR CH 1/10W 47	1	
R8901	ERJ6GEYJ102	M.RESISTOR CH 1/10W 1K	1	
R8902	ERJ6GEYJ471	M.RESISTOR CH 1/10W 470	1	
R8903	ERJ6GEYJ102	M.RESISTOR CH 1/10W 1K	1	
R8904	ERJ6GEYJ122	M.RESISTOR CH 1/10W 1.2K	1	
R8905	ERJ6GEYJ152	M.RESISTOR CH 1/10W 1.5K	1	
R8906-08	ERJ6GEYJ223	M.RESISTOR CH 1/10W 22K	3	
R8909	ERJ6GEYJ152	M.RESISTOR CH 1/10W 1.5K	1	
R8910	ERJ6GEYJ102	M.RESISTOR CH 1/10W 1K	1	
R8911	ERJ6GEYJ154	M.RESISTOR CH 1/10W 150K	1	
R8912	ERJ6GEYJ152	M.RESISTOR CH 1/10W 1.5K	1	
R8913	ERJ6GEYJ102	M.RESISTOR CH 1/10W 1K	1	
R8914	ERJ6GEYJ122	M.RESISTOR CH 1/10W 1.2K	1	
R8915	ERJ6GEYJ330	M.RESISTOR CH 1/10W 33	1	
R8916	ERJ6GEYJ681	M.RESISTOR CH 1/10W 680	1	
R8917	ERJ6GEYJ105	M.RESISTOR CH 1/10W 1M	1	
R8918	ERJ6GEYJ154	M.RESISTOR CH 1/10W 150K	1	
R8919	ERJ6GEYJ152	M.RESISTOR CH 1/10W 1.5K	1	
R8920	ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	1	
R8921,22	ERJ6GEYJ102	M.RESISTOR CH 1/10W 1K	2	
R8923	ERJ6GEYJ122	M.RESISTOR CH 1/10W 1.2K	1	
R8924	ERJ6GEYJ181	M.RESISTOR CH 1/10W 180	1	
R8925	ERJ6GEYJ152	M.RESISTOR CH 1/10W 1.5K	1	
R8926	ERJ6GEYJ470	M.RESISTOR CH 1/10W 47	1	
R8927	ERJ6GEY0R00	M.RESISTOR CH 1/10W 0	1	
R8940	ERJ6GEYJ102	M.RESISTOR CH 1/10W 1K	1	
R8941	ERJ6GEYG242	M.RESISTOR CH 1/10W 2.4K	1	

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
R8942	ERJ6GEYJ124	M.RESISTOR CH 1/10W 120K	1	
R8943	ERJ6GEYJ682	M.RESISTOR CH 1/10W 6.8K	1	
R8944	ERJ6GEYJ102	M.RESISTOR CH 1/10W 1K	1	
R8945	ERJ6GEYJ683	M.RESISTOR CH 1/10W 68K	1	
R8947	ERJ6GEYJ104	M.RESISTOR CH 1/10W 100K	1	
R8948	ERJ6GEYJ682	M.RESISTOR CH 1/10W 6.8K	1	
R8952	ERJ6GEYJ471	M.RESISTOR CH 1/10W 470	1	
R8953,54	ERJ6GEYJ101	M.RESISTOR CH 1/10W 100	2	
R8955-57	ERJ6GEYJ332	M.RESISTOR CH 1/10W 3.3K	3	
R8958	ERJ6GEYJ392	M.RESISTOR CH 1/10W 3.9K	1	
R8959-63	ERJ6GEYJ470	M.RESISTOR CH 1/10W 47	5	
R8964,65	ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	2	
R8966	ERJ6GEYJ470	M.RESISTOR CH 1/10W 47	1	
R8968	ERJ6GEYJ222	M.RESISTOR CH 1/10W 2.2K	1	
R8969	ERJ6GEYJ470	M.RESISTOR CH 1/10W 47	1	
R8971	ERJ6GEYJ471	M.RESISTOR CH 1/10W 470	1	
R8973	ERJ6GEYJ471	M.RESISTOR CH 1/10W 470	1	
R8974	ERJ6GEYJ102	M.RESISTOR CH 1/10W 1K	1	
R8975,76	ERJ6GEYJ105	M.RESISTOR CH 1/10W 1M	2	
R8979	ERJ6GEYJ683	M.RESISTOR CH 1/10W 68K	1	
R8980	ERJ6GEYG912	M.RESISTOR CH 1/10W 9.1K	1	
R8982	ERJ6GEYJ102	M.RESISTOR CH 1/10W 1K	1	
R8983	ERJ6GEYJ152	M.RESISTOR CH 1/10W 1.5K	1	
SW8701	VSR0045	SWITCH	1	<R>
TH8801	ERTD2FHL102S	THERMISTOR 1K	1	
VC8671	ECV1ZW20X60	V.CAPACITOR 20P	1	
VR8601	EVN32CA00B54	V.RESISTOR 50K	1	
VR8602	EVN32CA00B53	V.RESISTOR 5K	1	
VR8603	EVN32CA00B14	V.RESISTOR 10K	1	
VR8671	EVN32CA00B23	V.RESISTOR 2K	1	
VR8701	EVN32CA00B53	V.RESISTOR 5K	1	
VR8801,02	EVN32CA00B14	V.RESISTOR 10K	2	
VR8803	EVN32CA00B13	V.RESISTOR 1K	1	
VR8804	EVN32CA00B23	V.RESISTOR 2K	1	
VR8805	EVN32CA00B24	V.RESISTOR 20K	1	
VR8806	EVN32CA00B13	V.RESISTOR 1K	1	
VR8807,08	EVN32CA00B23	V.RESISTOR 2K	2	
VR8810,11	EVN32CA00B53	V.RESISTOR 5K	2	
VR8814	EVN32CA00B13	V.RESISTOR 1K	1	
VR8815	EVN32CA00B52	V.RESISTOR 500	1	
X8601	VSX0338	CRYSTAL OSCILLATOR	1	<R>
X8671	VSX0081	CRYSTAL OSCILLATOR	1	<R>

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
	VEP04424A	P.C.BOARD W/COMPONENT		
		XLR M		
C6710-13	ECKF1H103ZF	C.CAPACITOR 50V 0.01U	4	
J6722-25	VJP3417	CONNECTOR	4	
P6706	VJP1246T	CONNECTOR (MALE) 6P	1	
P6707	VJP1247T	CONNECTOR (MALE) 7P	1	
	VEP04425A	P.C.BOARD W/COMPONENT		
		XLR F		
C6714-17	ECKF1H103ZF	C.CAPACITOR 50V 0.01U	4	
J6726-29	VJS3417	CONNECTOR	4	
P6708	VJP1246T	CONNECTOR (MALE) 6P	1	
P6709	VJP1247T	CONNECTOR (MALE) 7P	1	
	VEP06906A	P.C.BOARD W/COMPONENT		
		9P IN CONNECT		
P69005	VJP3076	CONNECTOR	1	
P69006	VJS2074	CONNECTOR	1	

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
	VEP06908A	P.C.BOARD W/COMPONENT		
		REAR AMP		
C4001-04	ECEA1CSN100	E.CAPACITOR 16V 10U	4	
C4007-10	ECEA1CSN100	E.CAPACITOR 16V 10U	4	
C4014	ECEA1CKA470	E.CAPACITOR 16V 47U	1	
C4015	ECEA1CKA101	E.CAPACITOR 16V 100U	1	
C4016	ECEA1CKS470	E.CAPACITOR 16V 47U	1	
C4017	ECEA1CKS101	E.CAPACITOR 16V 100U	1	
C4018	ECEA1CKA470	E.CAPACITOR 16V 47U	1	
C4019	ECEA1CKA101	E.CAPACITOR 16V 100U	1	
C4020	ECEA1CSN100	E.CAPACITOR 16V 10U	1	
C4021	ECEA1EKA470	E.CAPACITOR 25V 47U	1	
C4022	ECEA1VKS470	E.CAPACITOR 35V 47U	1	
C4023	ECEA1CSN100	E.CAPACITOR 16V 10U	1	
C4024,25	ECEA1EKA470	E.CAPACITOR 25V 47U	2	
C4026	ECEA1CSN100	E.CAPACITOR 16V 10U	1	
C4027,28	ECEA1EKA470	E.CAPACITOR 25V 47U	2	
C4029	ECEA1CSN100	E.CAPACITOR 16V 10U	1	
C4030,31	ECEA1EKA470	E.CAPACITOR 25V 47U	2	
C4034	ECEA1CKS101	E.CAPACITOR 16V 100U	1	
C4035	ECEA1CKA220	E.CAPACITOR 16V 22U	1	
C4036-41	ECEA1CKA100	E.CAPACITOR 16V 10U	6	
C4042,43	ECEA1CKS100	E.CAPACITOR 16V 10U	2	
C4044	ECEA1CKA470	E.CAPACITOR 16V 47U	1	
C4045	ECEA1CKA101	E.CAPACITOR 16V 100U	1	
C4046-49	ECUM1H330JCN	C.CAPACITOR CH 50V 33P	4	
C6601,02	ECEA1AKA470	E.CAPACITOR 10V 47U	2	
C6604	ECUM1E104ZFN	C.CAPACITOR CH 25V 0.1U	1	
C6605	ECEA1AKA101	E.CAPACITOR 10V 100U	1	
C6606,07	ECUM1E104ZFN	C.CAPACITOR CH 25V 0.1U	2	
C6611	ECUM1H103ZFN	C.CAPACITOR 50V 0.01U	1	
C6612	ECEA0JKS470	E.CAPACITOR 6.3V 47U	1	
C6613	ECUM1H103ZFN	C.CAPACITOR 50V 0.01U	1	
C6614	ECEA0JKS470	E.CAPACITOR 6.3V 47U	1	
C6615	ECUM1H103ZFN	C.CAPACITOR 50V 0.01U	1	
C6616	ECEA1CKA470	E.CAPACITOR 16V 47U	1	
C6621,22	ECUM1H103ZFN	C.CAPACITOR 50V 0.01U	2	
C6623	ECEA0JKS470	E.CAPACITOR 6.3V 47U	1	
C6624	ECEA0JKA470	E.CAPACITOR 6.3V 47U	1	
C6628-36	ECUM1E104ZFN	C.CAPACITOR CH 25V 0.1U	9	
C6637-39	ECEA0JKA470	E.CAPACITOR 6.3V 47U	3	
C6640	ECUM1E104ZFN	C.CAPACITOR CH 25V 0.1U	1	
C6641	ECEA0JKA470	E.CAPACITOR 6.3V 47U	1	
C6642	ECUM1H103ZFN	C.CAPACITOR 50V 0.01U	1	
C6643	ECEA1HKS4R7	E.CAPACITOR 50V 4.7U	1	
C6644	ECEA0JKA470	E.CAPACITOR 6.3V 47U	1	
C6645	ECUM1H103ZFN	C.CAPACITOR 50V 0.01U	1	
C6646	ECEA0JKA470	E.CAPACITOR 6.3V 47U	1	
C6647	ECEA0JKS470	E.CAPACITOR 6.3V 47U	1	
C6648	ECUM1H103ZFN	C.CAPACITOR 50V 0.01U	1	
C6649	ECEA0JKA470	E.CAPACITOR 6.3V 47U	1	
C6650	ECEA1HKAR22	E.CAPACITOR 50V 0.22U	1	
C6651	ECUM1H150JCN	C.CAPACITOR CH 50V 15P	1	
C6652	ECUM1H270JCN	C.CAPACITOR CH 50V 27P	1	
C6653,54	ECUM1H220JCN	C.CAPACITOR CH 50V 22P	2	
C6655,56	ECUM1H330JCN	C.CAPACITOR CH 50V 33P	2	
C6657	ECUM1H103ZFN	C.CAPACITOR 50V 0.01U	1	
C6658	ECEA0JKS470	E.CAPACITOR 6.3V 47U	1	
C6659	ECUM1H103ZFN	C.CAPACITOR 50V 0.01U	1	
C6660	ECEA0JKA470	E.CAPACITOR 6.3V 47U	1	
C6661	ECUM1H102KBN	C.CAPACITOR CH 50V 1000P	1	
C6662-64	ECUM1E104ZFN	C.CAPACITOR CH 25V 0.1U	3	
C6665,66	ECUM1H103ZFN	C.CAPACITOR 50V 0.01U	2	
CT6601	ECV1ZW20X60	V.CAPACITOR 20P	1	
D4001	MA151WA	DIODE	1	<R>
D4002	MA151WK	DIODE	1	<R>

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
D4003	MA151WA	DIODE	1	<R>
D4004	MA151WK	DIODE	1	<R>
D4005	MA151WA	DIODE	1	<R>
D4006	MA151WK	DIODE	1	<R>
D4007	MA151WA	DIODE	1	<R>
D4008	MA151WK	DIODE	1	<R>
D4017	MA153A	DIODE	1	<R>
D6601,02	MA151K	DIODE	2	<R>
D6603	MA28W-AB	DIODE	1	<R>
IC4001-03	NJM4556MB	IC	3	<R>
IC4004	AN6558S	IC	1	<R>
IC4005-07	NJM4556MB	IC	3	<R>
IC4008	AN6558S	IC	1	<R>
IC4014-17	NJM4556MB	IC	4	<R>
IC6601	NJM2233BMA	IC	1	<R>
IC6605-08	MC14577CF	IC	4	<R>
IC6609	MC14576CF	IC	1	<R>
IC6610	MN1280-P	IC	1	<R>
IC6611	M50455-001SP	IC	1	<R>
IC6612	TC4S584F	IC	1	<R>
L6601-07	VLQEL05K101J	COIL	7	
L6608	VLQEL05K330J	COIL	1	
L6609,10	VLQEL05K560J	COIL	2	
L6611	VLQEL05K150J	COIL	1	
L6612	VLQEL05K101J	COIL	1	
P4006	VJP3490B13	CONNECTOR	1	
P4007,08	VJP3092	CONNECTOR (MALE)	2	
P4009	VJP3490B13	CONNECTOR	1	
P6601	VJS1490	CONNECTOR (FEMALE)	1	
P6602,03	VJP3490B13	CONNECTOR	2	
P6604	VJS1468	CONNECTOR (FEMALE)	1	
P6605	VJS1490	CONNECTOR (FEMALE)	1	
P6606	VJP3076	CONNECTOR	1	
P6607	VJP1243T	CONNECTOR (MALE) 3P	1	
P6608	VJS1488	CONNECTOR (FEMALE)	1	
Q4001-08	MSD601-R	TRANSISTOR	8	<R>
Q4010	2SD601-R	TRANSISTOR	1	<R>
Q4011	2SB710-R	TRANSISTOR	1	<R>
Q4015-17	2SD1306	TRANSISTOR	3	<R>
Q4021-23	2SD1306	TRANSISTOR	3	<R>
Q4027-29	2SD1306	TRANSISTOR	3	<R>
Q4033-35	2SD1306	TRANSISTOR	3	<R>
Q4036	MSB710-R	TRANSISTOR	1	<R>
Q4037	2SB710-R	TRANSISTOR	1	<R>
Q4038	2SD602-R	TRANSISTOR	1	<R>
Q6601-03	MSD601-R	TRANSISTOR	3	<R>
Q6606	MSB709-R	TRANSISTOR	1	<R>
Q6609,10	XN4501	TRANSISTOR-RESISTOR	2	<R>
Q6611	MSD601-R	TRANSISTOR	1	<R>
Q6612	XN4401	TRANSISTOR-RESISTOR	1	<R>
Q6613	MSB709-R	TRANSISTOR	1	<R>
QR6603	MRN1404	TRANSISTOR	1	<R>
QR6605	MRN2404	TRANSISTOR	1	<R>
QR6606,07	MRN1404	TRANSISTOR	2	<R>
R4001	ERJ6GEYJ681	M.RESISTOR CH 1/10W 680	1	
R4002,03	ERJ6GEYJ473	M.RESISTOR CH 1/10W 47K	2	
R4004,05	ERJ6GEYJ822	M.RESISTOR CH 1/10W 8.2K	2	

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
R4006,07	ERJ6GEYJ104	M.RESISTOR CH 1/10W 100K	2	
R4008	VRE0034E332	M.RESISTOR CH 1/10W 3.3K	1	
R4009-14	VRE0034E472	M.RESISTOR CH 1/10W 4.7K	6	
R4015	ERJ6GEYJ473	M.RESISTOR CH 1/10W 47K	1	
R4016	ERJ6GEYJ681	M.RESISTOR CH 1/10W 680	1	
R4017	ERJ6GEYJ473	M.RESISTOR CH 1/10W 47K	1	
R4018,19	ERJ6GEYJ822	M.RESISTOR CH 1/10W 8.2K	2	
R4020,21	ERJ6GEYJ104	M.RESISTOR CH 1/10W 100K	2	
R4022	VRE0034E332	M.RESISTOR CH 1/10W 3.3K	1	
R4023-28	VRE0034E472	M.RESISTOR CH 1/10W 4.7K	6	
R4029	ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	1	
R4030	ERJ6GEYJ183	M.RESISTOR CH 1/10W 18K	1	
R4032-35	ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	4	
R4036	ERJ6GEYJ183	M.RESISTOR CH 1/10W 18K	1	
R4038-40	ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	3	
R4041	ERJ6GEYJ681	M.RESISTOR CH 1/10W 680	1	
R4042,43	ERJ6GEYJ473	M.RESISTOR CH 1/10W 47K	2	
R4044,45	ERJ6GEYJ822	M.RESISTOR CH 1/10W 8.2K	2	
R4046,47	ERJ6GEYJ104	M.RESISTOR CH 1/10W 100K	2	
R4048	VRE0034E332	M.RESISTOR CH 1/10W 3.3K	1	
R4049-54	VRE0034E472	M.RESISTOR CH 1/10W 4.7K	6	
R4055	ERJ6GEYJ681	M.RESISTOR CH 1/10W 680	1	
R4056,57	ERJ6GEYJ473	M.RESISTOR CH 1/10W 47K	2	
R4058,59	ERJ6GEYJ822	M.RESISTOR CH 1/10W 8.2K	2	
R4060,61	ERJ6GEYJ104	M.RESISTOR CH 1/10W 100K	2	
R4062	VRE0034E332	M.RESISTOR CH 1/10W 3.3K	1	
R4063-68	VRE0034E472	M.RESISTOR CH 1/10W 4.7K	6	
R4069	ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	1	
R4070	ERJ6GEYJ183	M.RESISTOR CH 1/10W 18K	1	
R4072-76	ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	5	
R4077	ERJ6GEYJ183	M.RESISTOR CH 1/10W 18K	1	
R4079-82	ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	4	
R4094,95	ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	2	
R4096,97	ERJ6GEYJ151	M.RESISTOR CH 1/10W 150	2	
R4107	ERJ6GEYJ332	M.RESISTOR CH 1/10W 3.3K	1	
R4108	ERJ6GEYJ473	M.RESISTOR CH 1/10W 47K	1	
R4109	ERJ6GEYJ332	M.RESISTOR CH 1/10W 3.3K	1	
R4110	ERJ6GEYJ822	M.RESISTOR CH 1/10W 8.2K	1	
R4111	ERJ6GEYG912	M.RESISTOR CH 1/10W 9.1K	1	
R4112	ERJ6GEYJ470	M.RESISTOR CH 1/10W 47	1	
R4113,14	ERJ6GEYJ332	M.RESISTOR CH 1/10W 3.3K	2	
R4115	ERJ6GEYJ822	M.RESISTOR CH 1/10W 8.2K	1	
R4116	ERJ6GEYJ562	M.RESISTOR CH 1/10W 5.6K	1	
R4117	ERJ6GEYJ102	M.RESISTOR CH 1/10W 1K	1	
R4118	ERJ6GEYJ470	M.RESISTOR CH 1/10W 47	1	
R4119-23	ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	5	
R4133	ERJ6GEYJ473	M.RESISTOR CH 1/10W 47K	1	
R4134,35	ERJ6GEYJ332	M.RESISTOR CH 1/10W 3.3K	2	
R4136	ERJ6GEYJ822	M.RESISTOR CH 1/10W 8.2K	1	
R4137	ERJ6GEYJ470	M.RESISTOR CH 1/10W 47	1	
R4138	ERJ6GEYG912	M.RESISTOR CH 1/10W 9.1K	1	
R4139,40	ERJ6GEYJ332	M.RESISTOR CH 1/10W 3.3K	2	
R4141	ERJ6GEYJ822	M.RESISTOR CH 1/10W 8.2K	1	
R4142	ERJ6GEYJ562	M.RESISTOR CH 1/10W 5.6K	1	
R4143	ERJ6GEYJ102	M.RESISTOR CH 1/10W 1K	1	
R4144	ERJ6GEYJ470	M.RESISTOR CH 1/10W 47	1	
R4145-49	ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	5	
R4159	ERJ6GEYJ473	M.RESISTOR CH 1/10W 47K	1	
R4160,61	ERJ6GEYJ332	M.RESISTOR CH 1/10W 3.3K	2	
R4162	ERJ6GEYJ822	M.RESISTOR CH 1/10W 8.2K	1	
R4163	ERJ6GEYJ470	M.RESISTOR CH 1/10W 47	1	
R4164,65	ERJ6GEYJ332	M.RESISTOR CH 1/10W 3.3K	2	
R4166	ERJ6GEYJ562	M.RESISTOR CH 1/10W 5.6K	1	
R4167	ERJ6GEYJ102	M.RESISTOR CH 1/10W 1K	1	
R4168	ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	1	
R4169	ERJ6GEYJ822	M.RESISTOR CH 1/10W 8.2K	1	
R4170	ERJ6GEYJ470	M.RESISTOR CH 1/10W 47	1	
R4171	ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	1	
R4172	ERJ6GEYG912	M.RESISTOR CH 1/10W 9.1K	1	
R4173-75	ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	3	
R4185	ERJ6GEYJ473	M.RESISTOR CH 1/10W 47K	1	
R4186,87	ERJ6GEYJ332	M.RESISTOR CH 1/10W 3.3K	2	
R4188	ERJ6GEYJ822	M.RESISTOR CH 1/10W 8.2K	1	
R4189	ERJ6GEYG912	M.RESISTOR CH 1/10W 9.1K	1	
R4190	ERJ6GEYJ470	M.RESISTOR CH 1/10W 47	1	

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
R4191,92	ERJ6GEYJ332	M.RESISTOR CH 1/10W 3.3K	2	
R4193	ERJ6GEYJ822	M.RESISTOR CH 1/10W 8.2K	1	
R4194	ERJ6GEYJ562	M.RESISTOR CH 1/10W 5.6K	1	
R4195	ERJ6GEYJ102	M.RESISTOR CH 1/10W 1K	1	
R4196	ERJ6GEYJ470	M.RESISTOR CH 1/10W 47	1	
R4197-01	ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	5	
R4204	ERJ6GEYJ104	M.RESISTOR CH 1/10W 100K	1	
R4205	ERJ6GEYJ563	M.RESISTOR CH 1/10W 56K	1	
R4206,07	ERJ6GEYJ151	M.RESISTOR CH 1/10W 150	2	
R4208-11	ERJ6GEYJ562	M.RESISTOR CH 1/10W 5.6K	4	
R6601	ERJ6GEYJ332	M.RESISTOR CH 1/10W 3.3K	1	
R6602	ERJ6GEYJ470	M.RESISTOR CH 1/10W 47	1	
R6604	ERJ6GEYG750	M.RESISTOR CH 1/10W 75	1	
R6605	ERJ6GEYJ221	M.RESISTOR CH 1/10W 220	1	
R6606	ERJ6GEYJ102	M.RESISTOR CH 1/10W 1K	1	
R6607	ERJ6GEYJ470	M.RESISTOR CH 1/10W 47	1	
R6608	ERJ6GEYJ102	M.RESISTOR CH 1/10W 1K	1	
R6609	ERJ6GEYG472	M.RESISTOR CH 1/10W 4.7K	1	
R6610	ERJ6GEYJ272	M.RESISTOR CH 1/10W 2.7K	1	
R6618	ERJ6GEYJ221	M.RESISTOR CH 1/10W 220	1	
R6619	ERJ6GEYJ102	M.RESISTOR CH 1/10W 1K	1	
R6620	ERJ6GEYJ470	M.RESISTOR CH 1/10W 47	1	
R6621,22	VRE0034E102	M.RESISTOR CH 1/10W 1K	2	
R6623	ERJ6GEYJ104	M.RESISTOR CH 1/10W 100K	1	
R6624-26	ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	3	
R6628-31	VRE0034E471	M.RESISTOR CH 1/10W 470	4	
R6632,33	ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	2	
R6639-48	VRE0034E471	M.RESISTOR CH 1/10W 470	10	
R6649	ERJ6GEYJ152	M.RESISTOR CH 1/10W 1.5K	1	
R6650	ERJ6GEYJ474	M.RESISTOR CH 1/10W 470K	1	
R6652	ERJ6GEYJ104	M.RESISTOR CH 1/10W 100K	1	
R6653	ERJ6GEYJ562	M.RESISTOR CH 1/10W 5.6K	1	
R6654,55	ERJ6GEYJ152	M.RESISTOR CH 1/10W 1.5K	2	
R6656	ERJ6GEYJ271	M.RESISTOR CH 1/10W 270	1	
R6657	ERJ6GEYJ102	M.RESISTOR CH 1/10W 1K	1	
R6658	ERJ6GEYJ681	M.RESISTOR CH 1/10W 680	1	
R6659	ERJ6GEYJ272	M.RESISTOR CH 1/10W 2.7K	1	
R6660	ERJ6GEYJ391	M.RESISTOR CH 1/10W 390	1	
R6662	ERJ6GEYJ471	M.RESISTOR CH 1/10W 470	1	
R6663	ERJ6GEYJ222	M.RESISTOR CH 1/10W 2.2K	1	
R6664	ERJ6GEYJ272	M.RESISTOR CH 1/10W 2.7K	1	
R6665	ERJ6GEYJ182	M.RESISTOR CH 1/10W 1.8K	1	
R6666	ERJ6GEYJ332	M.RESISTOR CH 1/10W 3.3K	1	
R6667	ERJ6GEYJ223	M.RESISTOR CH 1/10W 22K	1	
R6668	ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	1	
R6669	ERJ6GEYJ124	M.RESISTOR CH 1/10W 120K	1	
R6670	ERJ6GEYJ102	M.RESISTOR CH 1/10W 1K	1	
R6671	ERJ6GEYJ221	M.RESISTOR CH 1/10W 220	1	
R6672	ERJ6GEYJ103	M.RESISTOR CH 1/10W 10K	1	
R6673	ERJ6GEYJ561	M.RESISTOR CH 1/10W 560	1	
SW4004,05	VSS0208	SWITCH	2	<R>
VR4005-08	EVN32CA00B53	V.RESISTOR 5K	4	
X6601	VSX0197	CRYSTAL OSCILLATOR	1	<R>

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
	VEP06909A	P.C.BOARD W/COMPONENT		
		REAR JACK		
J6701-04	VJS3154	CONNECTOR (FEMALE)	4	
J6705	VJS3155	CONNECTOR	1	
J6709	VJP3414A015	CONNECTOR	1	
J6711-13	VJS3154	CONNECTOR (FEMALE)	3	
J6714,15	VJS3155	CONNECTOR	2	
J6716-18	VJS3154	CONNECTOR (FEMALE)	3	
J6719	VJJ0322	CONNECTOR	1	
J6720,21	VJS3154	CONNECTOR (FEMALE)	2	
P6701	VJS3215B012	CONNECTOR (FEMALE) 12P	1	
P6702	VJS3215B008	CONNECTOR	1	
P6703	VJS3215B012	CONNECTOR (FEMALE) 12P	1	
P6704	VJS3215B010	CONNECTOR	1	
P6705	VJP3080	CONNECTOR (MALE)	1	
R6701,02	ERDS2CKG75R0	M.RESISTOR 1/4W 75	2	
R6704-06	ERDS2CKG75R0	M.RESISTOR 1/4W 75	3	
R6707	ERDS2CKG68R0	M.RESISTOR 1/4W 68	1	
R6708-14	ERDS2CKG75R0	M.RESISTOR 1/4W 75	7	
R6718,19	ERDS2TJ104	C.RESISTOR 1/4W 100K	2	
SW6701,02	VSS0303	SWITCH	2	<R>
		MISCELLANEOUS		
E98	VMP4232	CONNECTOR ANGLE	1	
E99	VMX2078	SPACER	3	
	VXQ0102	SCREW	2	
E100	XTV3+8FFZ	SCREW	2	

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks

! Warning

This service information is designed for experienced repair technicians only and is not designed for use by the general public. It does not contain warnings or cautions to advice non-technical individuals of potential dangers in attempting to service a product. Products powered by electricity should be serviced or repaired only by experienced professional technicians. Any attempt to service or repair the product or products dealt with in this service manual by anyone else could result in serious injury or death.

Order No. VSD9610S207
D4

Service Manual

Supplement

NTSC / PAL **Video Product**

Subject : Change of Jumper Wire Connection

Please use this supplement together with the Service Manual as follows :

Model No.	Bulletin No.	Order No.	Effective from
AG-DS850P	80	VSD9403M244	K6-----
AG-DS850HP V16457	3	VSD9605M201	K6-----
AG-DS840P	42	VSD9411M254	K6-----
AG-DS840HP V16457	3	VSD9605M201	K6-----
AG-DS550P	5	VSD9511M265	K6-----
AG-DS540P	4	VSD9511M265	K6-----
AG-7700E	13	VSD9502M642	K6-----
AG-7600E	10	VSD9502M642	K6-----
AG-8700E	8	VSD9512M601	K6-----
AG-8600E	8	VSD9512M601	K6-----

Board: REAR JACK

Reason for Change

- ☐ The following part(s) has(have) been changed for serviceability improvement.
- ■ The following part(s) has(have) been changed for productivity improvement.
- ☐ The following part(s) has(have) been changed for standardization.
- ☐ The following part(s) has (have) been changed for the safety regulation.
- ☐

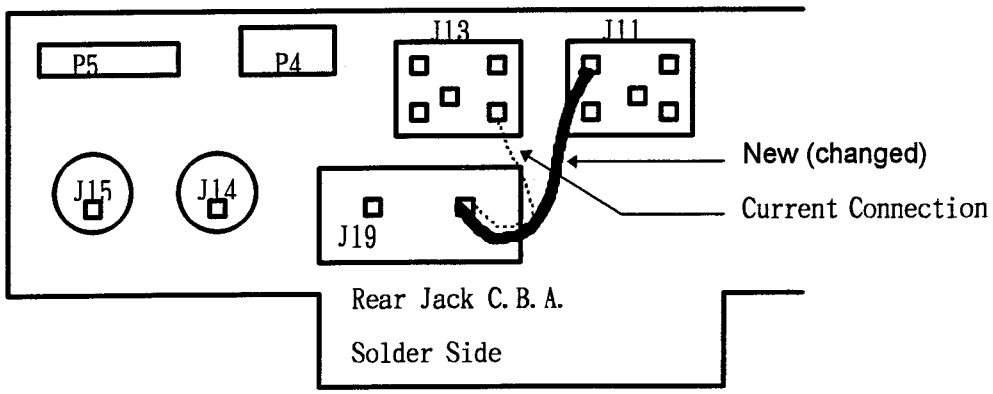

TE2-4644

Panasonic

© 1996 Matsushita Electric Industrial Co., Ltd. All rights reserved.
Unauthorized copying and distribution is a violation of law.

! Warning

This service information is designed for experienced repair technicians only and is not designed for use by the general public. It does not contain warnings or cautions to advice non-technical individuals of potential dangers in attempting to service a product. Products powered by electricity should be serviced or repaired only by experienced professional technicians. Any attempt to service or repair the product or products dealt with in this service manual by anyone else could result in serious injury or death.

Order No. VSD9806S204
D4

Service Manual

Supplement

NTSC/PAL **Video Product**

Subject : Change of IC

Please use this supplement together with the Service Manual as follows :

Model No.	Bulletin No.	Order No.	Effective from
AG-DS545P	6	VSD9703M203	'98 Running Change
AG-DS555P	6	VSD9703M203	'98 Running Change
AG-DS840HP	11	VSD9605M201	'98 Running Change
AG-DS850HP	12	VSD9605M201	'98 Running Change
AG-7600E	15	VSD9502M642	'98 Running Change
AG-7700E	17	VSD9502M642	'98 Running Change
AG-8600E	14	VSD9512M601	'98 Running Change
AG-8700E	13	VSD9512M601	'98 Running Change

Board: SYSCON/SERVO C.B.A.

Reason for Change

- ☐ The following part(s) has(have) been changed for serviceability improvement.
- ☐ The following part(s) has(have) been changed for productivity improvement.
- ■ The following part(s) has(have) been changed for standardization.
- ☐ The following part(s) has (have) been changed for the safety regulation.
- ☐

Interchangeability Code (I/C)

A	Original or new parts may be used in early or late production set. Use original parts until exhausted, then stock new parts.
B	Original parts may be used in early production sets only. New parts may be used in early or late production sets. Use original parts possible then stock new parts.
C	New parts only may be used in early or late production sets.
D	Original parts may be used in early production sets only. New parts may be used in late production sets only. Stock both original and new parts.
E	Others

Part Number

Ref. No.	Original Part No.	New Part No.	Part Name & Descriptions	Pcs	I/C	Remarks
IC2202	L7A0269	L7A1469	IC	1	A	

TDE2095 TE25087

Panasonic

© 1998 Matsushita Electric Industrial Co., Ltd. All rights reserved.
Unauthorized copying and distribution is a violation of law.

! Warning

This service information is designed for experienced repair technicians only and is not designed for use by the general public. It does not contain warnings or cautions to advice non-technical individuals of potential dangers in attempting to service a product. Products powered by electricity should be serviced or repaired only by experienced professional technicians. Any attempt to service or repair the product or products dealt with in this service manual by anyone else could result in serious injury or death.

Order No. VSD9806S211
D4

Service Manual

Supplement

NTSC/PAL **Video Product**

Subject : Improvement of Audio Circuit

Please use this supplement together with the Service Manual as follows :

Model No.	Bulletin No.	Order No.	Effective from
AG-DS545P	7	VSD9703M203	C8-----
AG-DS840HP	12	VSD9605M201	C8-----
AG-7600E	16	VSD9502M642	C8-----
AG-8600E	16	VSD9512M601	C8-----

Board: AUDIO (1) C.B.A.

Symptom : Hum noise may be generated from the audio outputs when bringing monitor TV (model TM-1420BT) by equal to less than 50 cm.

Remedy : To improve this symptom, a jumper wire have been added as shown below.

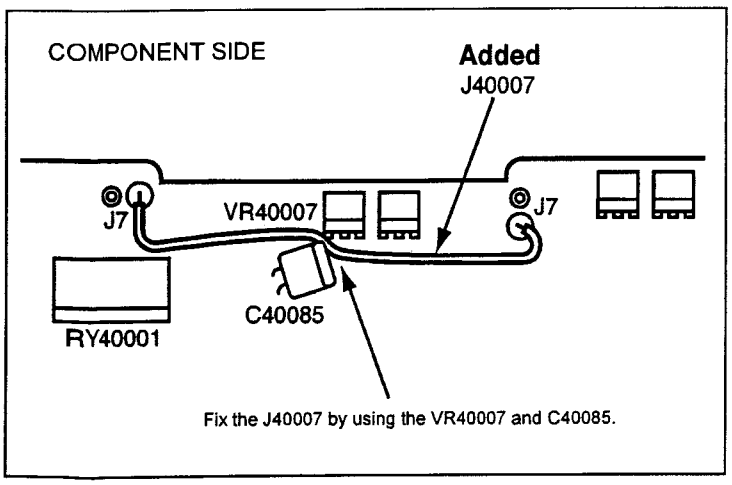

TDE1087TE25198

Panasonic

© 1998 Matsushita Electric Industrial Co., Ltd. All right reserved.
Unauthorized copying and distribution is a violation of law.